

Government of The People's Republic of Bangladesh

Ministry of Water Resources

Bangladesh Water Development Board



**Environmental Impact Assessment (EIA)
(Draft)**

River Bank Improvement Program (RBIP)

January 2015

List of Acronyms

ADB	Asian Development Bank
AEZ	Agro Ecological Zone
APHA	American Public Health Association
BCCSAP	Bangladesh Climate Change Strategy and Action Plan
BDT	Bangladesh Taka
BMD	Bangladesh Meteorological Department
BOD	Biological Oxygen Demand
BRE	Brahmaputra Right-bank Embankment
BSM	Brahmaputra System Model
BWDB	Bangladesh Water Development Board
CC	Cement concrete
CIA	Cumulative Impact Assessment
CoP	Conference of the Parties
CPUE	Catch per unit effort
CSC	Construction supervision consultants
DAE	Department of Agricultural Extension
DC	Deputy Commissioner
DEM	Digital elevation model
DFL	Design Flood Level
DG	Director General
DO	Dissolved Oxygen
DoE	Department of Environment
DoF	Department of Fisheries
DPP	Development Project Proforma
DTW	Deep Tube Well
EA	Environmental Assessment
ECA	Environmental Conservation Act
ECC	Environmental Clearance Certificate
ECOP	Environmental Code of Practice
ECR	Environment Conservation Rules
EHS	Environment, Health, and Safety
EIA	Environmental Impact Assessment
EMP	Environmental Management Plan
ERP	Emergency Response Plan
ESC	Environmental and social cell
ESMP	Environmental and social management plan
ESDU	Environmental and social unit
EQS	Environmental Quality Standards

FAA	Flood Affected Area
FAP	Flood Action Plan
FFS	Farmer Field School
FGD	Focused group discussion
FHWA	Federal Highway Administration
FPCO	Flood Plan Co-ordination Organization
GCM	General Circulation Model
GoB	Government of Bangladesh
GDP	Gross Domestic Product
GHG	Green House Gases
GRM	Grievance redress mechanism
GSB	Geological Survey of Bangladesh
HH	Household
HIES	Household Income and Expenditure Survey
HIV	Human Immunodeficiency Virus
HL	High Level
HSE	Health, safety, and environment
HYV	High Yielding Variety
IEC	Important environmental component
IEC	Information, education, and communication
IEE	Initial Environmental Examination
IESC	Important environmental and social component
IPCC	Intergovernmental Panel on Climate Change
IPM	Integrated Pest Management
IPOE	Independent Panel of Experts
IPMP	Integrated Pest Management Plan
IPSNM	Integrated Plant and Soil Nutrient Management
IUCN	International Union of Conservation of Nature
IWM	Institute of Water Modelling
JMREMP	Jamuna Meghna River Erosion Mitigation Project
LL	Low Level
LLP	Low Lift Pump
MHL	Medium High Level
MoEF	Ministry of Environment and Forest
NAPA	National Adaptation Program of Action
NEMAP	National Environment Management Action Plan
NEP	National Environment Policy
NFP	National Fisheries Policy
NGO	Non Governmental Organization

NLDP	National Livestock Development Policy
NLUP	National Land Use Policy
NWMP	National Water Management Plan
NWP	National Water Policy
O&M	Operation and maintenance
OHS	occupational health and safety
PIA	Project Influence Area
PIRDP	Pabna Irrigation and Rural Development Project
PMU	Project management unit
PPE	Personal Protective Equipment
PWD	Public Work Department
RAP	Resettlement Action Plan
RBIP	River Bank Improvement Program
RCC	Reinforced cement concrete
RCNM	Roadway Construction Noise Model
RHD	Roads and Highway Department
ROG	Reactive Oxygen Gases
RS	Resettlement Site
SASEC	South Asian Sub-Regional Economic Co-operation
SDP	Social Development Plan
SEALS	Sundarbans Environmental And Livelihoods Security
STW	Shallow Tube Well
TDS	Total Dissolved Solids
TSP	Tri Super Phosphate
UNFCCC	United Nations Framework Convention on Climate Change
VEC	Valued Environmental Component
WARPO	Water Resources Planning Organization
WB	World Bank

Glossary

<i>Aman:</i>	Group of rice varieties grown in the monsoon season and harvested in the post-monsoon season. This is generally transplanted at the beginning of monsoon from July-August and harvested in November and December. Mostly rain-fed, supplemental irrigation needed in places during dry spell.
<i>Aus:</i>	Group of rice varieties sown in the pre-monsoon season and harvested in the monsoon season. These are broadcasted/transplanted during March-April and harvested during June-July. Generally rain-fed, irrigation needed for high yield variety (HYV) of transplanted Aus.
<i>Beel:</i>	A natural depression, which generally retains water throughout the year and in some cases seasonally connected to the river system.
<i>Boro:</i>	A group of rice varieties sown and transplanted in winter and harvested at the end of the pre-monsoon season. These are mostly HYV and fully irrigated, planted in December-January and harvested before the onset of monsoon in April- May.
<i>Haor:</i>	A back swamp or bowl-shaped depression located between the natural levees of rivers and comprises of a number of <i>beels</i> .
<i>Haat:</i>	Market place where market exchanges are carried out either once, twice or thrice a week, however not every day.
<i>Jaal:</i>	Different types of fishing net to catch fish from the water bodies.
<i>Kacha:</i>	A house made of locally available materials with earthen floor, commonly used in the rural areas.
<i>Kole:</i>	Kole is a seasonal closed water body separated from river, formed when river water started to dried up ; act as nursery and feeding ground for fish and become merged with river again during high flow season. These are generally embayments in chars
<i>Khal:</i>	A drainage or irrigation channel usually small, sometimes man-made. The channel through which the water flows. These may or may not be perennial.
<i>Kharif:</i>	Pre-monsoon and monsoon growing season. Cropping season linked to monsoon between March-October, often divided into kharif-1 (March-June) and kharif-2 (July-October).
<i>Pacca:</i>	Well constructed building using modern masonry materials.
<i>Rabi:</i>	Dry agricultural crop growing season; mainly used for the cool winter season between November and February.
<i>T. Aman:</i>	transplanted aman rice
<i>Upazila:</i>	Upazila is an administrative subdivision of a district.

Table of Contents

Volume I

List of Acronyms	ii
Glossary	v
1. Introduction.....	1-1
1.1. Program Background	1-1
1.2. Overview of Proposed Program.....	1-3
1.3. Study Scope.....	1-5
1.4. Study Methodology	1-5
1.5. Project Influence Area/Study Area	1-5
1.6. Study Team	1-6
1.7. Document Structure	1-7
2. Policy and Regulatory Review	2-1
2.1. National Environmental Laws	2-1
2.1.1. Bangladesh Environment Conservation Act (ECA), 1995.....	2-1
2.1.2. Bangladesh Environment Conservation Act (ECA), (Amendments) 2010	2-1
2.1.3. Bangladesh Environment Conservation Rules (ECR), 1997	2-1
2.1.4. Bangladesh Environment Court Act, 2010.....	2-2
2.2. Relevant National Policies, Strategies and Plans	2-2
2.2.1. National Environment Policy, 1992	2-2
2.2.2. National Environment Management Action Plan, 1995.....	2-3
2.2.3. National Water Policy, 1999	2-3
2.2.4. National Water Management Plan, 2001 (Approved in 2004).....	2-4
2.2.5. National Land Use Policy (MoL, 2001).....	2-4
2.2.6. National Agriculture Policy, 1999	2-4
2.2.7. National Integrated Pest Management Policy.....	2-5
2.2.8. National Fisheries Policy, 1996.....	2-5
2.2.9. National Livestock Development Policy, 2007	2-5
2.2.10. Privat Forest Policy 1994	2-5
2.2.11. National Policy for Safe Water Supply and Sanitation (1998)	2-6
2.2.12. National Policy for Arsenic Mitigation (2004)	2-6
2.2.13. National Adaptation Programme of Action (NAPA)	2-6
2.2.14. Bangladesh Climate Change Strategy and Action Plan (BCCSAP) 2009	2-7
2.3. Other Relevant Acts, Laws and Rules.....	2-7
2.3.1. Bangladesh Wildlife (Protection and Safety) Act 2012.....	2-7
2.3.2. Bangladesh Wildlife (Preservation) Order (1973) and Act (1974).....	2-8
2.3.3. Protection and Conservation of Fish Act (1950).....	2-8

2.3.4.	East-Bengal Protection and Fish Conservation Act (1950) and Amendments .	2-9
2.3.5.	Protection and Conservation of Fish Rules (1985)	2-9
2.3.6.	Forestry Acts	2-9
2.3.7.	Forest Act 1927 (Amendment 2000)	2-10
2.3.8.	Private Forest Act (PFA), 1959	2-10
2.3.9.	Embankment and Drainage Act, 1952	2-10
2.3.10.	Bangladesh Labor Act, 2006	2-11
2.3.11.	Bangladesh National Building Code, 2006	2-11
2.3.12.	Other Laws	2-12
2.4.	International Treaties Signed by GoB	2-13
2.5.	Implication of GoB Polices, Acts and Rules on RBIP	2-14
2.6.	World Bank's Environmental Safeguard Policies	2-15
2.6.1.	Environmental Assessment (OP 4.01)	2-16
2.6.2.	Natural Habitats (OP 4.04)	2-17
2.6.3.	Physical Cultural Resources (OP 4.11)	2-17
2.6.4.	Forests (OP 4.36)	2-18
2.6.5.	Projects on International Waterways (OP 7.50)	2-18
2.6.6.	Pest Management (OP 4.09)	2-18
2.6.7.	Indigenous Peoples (OP 4.10)	2-19
2.6.8.	Involuntary Resettlement (OP 4.12)	2-19
2.6.9.	Projects in Disputed Areas (OP 7.60)	2-20
2.6.10.	Safety of Dams (OP 4.37)	2-20
2.6.11.	Access to Information	2-20
2.6.12.	Environment, Health and Safety Guidelines	2-20
2.6.13.	Applicable World Bank Policies	2-21
3.	Project Description.....	3-1
3.1.	Background	3-1
3.2.	Proposed Interventions	3-2
3.2.1.	Program Rationale	3-2
3.2.2.	Program Objectives	3-3
3.2.3.	Program Boundaries	3-4
3.3.	Program Area, Work Sequencing, and Key Components	3-7
3.3.1.	RBIP Area and Selection of Priority Reach	3-7
3.3.2.	The Phased Program	3-8
3.3.3.	Flood Embankments	3-10
3.3.4.	The Construction Road	3-14
3.3.5.	Regulators and Fish Passes	3-16
3.3.6.	Riverbank Protection	3-16

3.4.	Resources Requirements	3-22
3.4.1.	Material Requirements and their Sources.....	3-22
3.4.2.	Manpower Requirements.....	3-23
3.4.3.	Construction Machinery	3-24
3.4.4.	Construction Camps.....	3-24
3.5.	Operational and Maintenance Requirements	3-25
3.5.1.	O&M Requirement of Bank protection structures.....	3-26
3.5.2.	O&M Requirements of Embankment cum Road	3-26
3.5.3.	O&M Requirements of Regulators	3-26
3.6.	Project Costs (to be updated)	3-26
4.	Analysis of Alternatives.....	4-1
4.1.	Overview	4-1
4.2.	No Project Alternative	4-2
4.2.1.	Retirement of BRE and Failure of Bank Protection Structures.....	4-2
4.2.2.	Damages from Jamuna Right Bank Erosion	4-2
4.2.3.	Damages from Breach of BRE	4-3
4.2.4.	Current Approaches by BWDB to address Bank Erosion.....	4-4
4.3.	Alternatives for River Bank Protection	4-4
	Embankment and Road Options	4-16
4.3.1.	Option 1: Widening of existing embankment with local road.....	4-16
4.3.2.	Option 2: Reconstructed embankment on the floodplain with two-lane road at safe distance from the riverbank.....	4-16
4.3.3.	Option 3: Embankment on the floodplain with separate four-lane highway as through road and adjacent local roads and bridges for crossing the highway	4-17
4.3.4.	Option 4: Embankment on filled land in the river with separate four lane highway and local road connections similar to Option 3	4-17
4.4.	Alternatives for Embankment Materials	4-21
4.5.	Alternatives for Regulators	4-21
4.6.	Alternatives for Resettlement Sites	4-22
5.	Description of Physical Environment.....	5-1
5.1.	Brahmaputra River Overview	5-1
5.2.	Climate	5-3
5.2.1.	Temperature.....	5-3
5.2.2.	Precipitation	5-4
5.2.3.	Wind Speed.....	5-5
5.2.4.	Humidity	5-5
5.3.	Topography	5-6
5.3.1.	Floodplains.....	5-8

5.3.2. Charland.....	5-8
5.4. Hydrology and Floods	5-9
5.4.1. Other Surface Water Resources	5-9
5.4.2. Jamuna Tributaries	5-11
5.4.3. Floods.....	5-13
5.4.4. Navigation in River and Khals	5-14
5.4.5. Erosion and Sediment Loading	5-16
5.5. Geology and Hydrogeology.....	5-17
5.5.1. Soils.....	5-17
5.5.2. Geology	5-18
5.5.3. Groundwater	5-18
5.5.4. Landuse and Land Cover Analysis.....	5-19
5.6. Quality of Environment.....	5-21
5.6.1. Ambient Air Quality in the Project Area	5-21
5.6.2. Sources of Pollution	5-22
5.7. Ambient Noise Levels in Project Area.....	5-22
5.8. Surface Water Quality.....	5-24
5.8.1. Water Temperature.....	5-26
5.8.2. Taste and Odor	5-26
5.8.3. pH.....	5-26
5.8.4. Dissolved Oxygen (DO)	5-26
5.8.5. Conductivity	5-26
5.8.6. BOD ₅	5-27
5.8.7. Total Dissolved Solids (TDS).....	5-27
5.9. Groundwater Quality	5-27
5.10. Soil Quality	5-28
6. Description of Ecological Environment.....	6-1
6.1. Overview: State of Biodiversity.....	6-1
6.1.1. Ecosystem Diversity	6-3
6.1.2. Threatened Species	6-3
6.1.3. Critical Natural Habitats.....	6-5
6.2. Project Area Ecosystems.....	6-8
6.2.1. Human Influence	6-8
6.2.2. Terrestrial Ecosystems.....	6-8
6.2.3. River-Charland-Wetland Ecosystems	6-10
6.3. Vegetation.....	6-11
6.3.1. Terrestrial Vegetation.....	6-12
6.3.2. Aquatic Vegetation	6-13

6.3.3. Exotic Species.....	6-14
6.4. Wildlife.....	6-14
6.4.1. Mammals	6-14
6.4.2. Birds	6-19
6.4.3. Reptiles	6-20
6.4.4. Amphibians	6-23
6.4.5. Terrestrial Invertebrates.....	6-24
6.4.6. Ecosystem Services	6-24
6.4.7. Threats to Ecosystem.....	6-27
6.4.8. Use of Agrochemicals	6-27
6.4.9. Potential Vectors of Diseases	6-28
6.4.10. Other Threats.....	6-28
6.5. Fish and Fisheries.....	6-29
6.5.1. Summary of the fish and fisheries baseline.....	6-29
6.5.2. Jamuna River - A suitable habitat of fresh water fishes	6-30
6.5.3. Fish habitat	6-31
6.5.4. Fish Production	6-37
6.5.5. Fishing Effort.....	6-39
6.5.6. Fish Biodiversity	6-42
6.5.7. Species of Conservation Significance.....	6-43
6.5.8. Area of Conservation Significance	6-44
6.5.9. Fish Migration.....	6-49
6.5.10. Timing of fish migration.....	6-53
6.5.11. Fish catch composition	6-55
6.5.12. Aquatic Invertebrates	6-56
6.6. Dry Season Data.....	6-57
7. Description of Social Environment.....	7-1
7.1. Overview of Erosion and Migration	7-1
7.2. Socioeconomic Perspective	7-2
7.3. Administrative Units and Set Up.....	7-4
7.4. Demography	7-5
7.5. Income and Poverty	7-7
7.6. Education	7-11
7.7. Public Health	7-13
7.8. Water Supply and Sanitation	7-14
7.9. Electricity	7-16
7.10. Transport and Communication.....	7-17
7.11. Chars	7-18

7.12. Gender	7-19
7.13. Agriculture	7-19
7.13.1. Overview	7-19
7.13.2. Soil and Agriculture Resources in the Influenced Area of RBIP	7-21
7.13.3. Farm Size of Project Area	7-23
7.13.4. Flood Prone Area and crop damage	7-23
7.13.5. Crops and Cropping Patterns of the Project Area	7-23
7.13.6. Land Use Intensity and Cropping Intensity	7-26
7.13.7. Crop Economics	7-26
7.13.8. Irrigation Coverage	7-27
7.13.9. Agricultural Inputs	7-28
8. Climate Change	8-1
8.1. Overview	8-1
8.2. Global Context	8-1
8.2.1. Warming of the Planet	8-1
8.2.2. Ice, Snow, Permafrost, Rain, and Oceans	8-2
8.2.3. Hurricanes	8-2
8.2.4. Model-based Projections for the Future	8-2
8.3. Climate Change in Bangladesh	8-3
8.4. Observed changes in climate in Bangladesh	8-3
8.4.1. Temperature	8-3
8.4.2. Rainfall	8-4
8.4.3. Sea level rise	8-5
8.5. Predicted changes in climate in Bangladesh	8-6
8.6. Predicted Climate Change Impacts and Adaptation Strategy for Project Area	8-8
8.7. Climate change adaptation in RBIP design	8-9
9. Impact Assessment	9-1
9.1. Potential Impacts - Overview	9-1
9.2. Impact Assessment Methodology	9-1
9.2.1. Impact Magnitude	9-2
9.2.2. Sensitivity of Receptor	9-2
9.3. Summary of Assessed Impacts	9-3
9.4. Impact Assessment and Mitigation for Important Environmental and Social Components	9-7
9.4.1. Significant Environmental Impacts from Project Siting	9-7
9.4.2. Significant Social Impacts from Project Siting	9-25
9.4.3. Significant Environmental Impacts during Construction	9-34
9.4.4. Significant Social Impacts during Construction	9-42

9.4.5. Environmental Impacts during Operation and Maintenance.....	9-45
9.4.6. Significant Social Impacts during Operation and Maintenance	9-48
10. Cumulative Impacts	10-1
10.1. Overview	10-1
10.2. ClIA in Context of RBIP	10-1
10.2.1. Study Boundaries	10-1
10.2.2. Identification of VECs for the ClIA	10-1
10.3. Morphology	10-2
10.3.1. Background	10-2
10.3.2. Erosion and Accretion.....	10-3
10.3.3. Landuse Changes	10-4
10.3.4. Ecological Changes.....	10-5
10.3.5. Population Displacement.....	10-5
10.3.6. Future Trends	10-6
Cumulative Effects	10-6
10.4. Flood Affected Area	10-7
10.4.1. Background	10-7
10.4.2. Future Trends	10-7
10.4.3. Hydropower dam development	10-8
10.4.4. Water diversion scenarios	10-9
10.4.5. Cumulative Effects	10-11
10.5. Induced Environmental Impacts	10-13
10.5.1. Road Network Development	10-14
10.5.2. Roadside Development.....	10-15
10.5.3. Industrialization	10-17
11. Environmental and Social Management Plan.....	11-1
11.1. ESMP Objectives	11-1
11.2. Inclusion of Relevant Components of ESMP in Contract Documents	11-1
11.3. Institutional Arrangements.....	11-2
11.3.1. Construction Phase	11-2
11.3.2. O&M Phase	11-3
11.3.3. Environment and Social Development Unit	11-3
11.3.4. Construction Supervision Consultants (CSC)	11-5
11.3.5. Contractors	11-6
11.4. Environmental and Social Management.....	11-7
11.4.1. Environmental Codes of Practice.....	11-8
11.4.2. Mitigations and Compliance Monitoring Plans	11-9
11.4.3. Site Specific Management Plans.....	11-9

1. 11-11	
1. 11-71	
11.5. Effects Monitoring during Construction	11-74
11.6. Performance Indicators	11-77
11.7. Grievance Redress Mechanism	11-78
11.7.1. Local Grievance Redress Committee	11-78
11.7.2. Project Grievance Redress Committee	11-78
11.8. Capacity Building	11-79
11.9. Documentation	11-80
11.10. EMP Implementation Cost	11-80
12. Stakeholder Consultations	12-1
12.1. Consultation Objectives	12-1
12.2. Approach and Methodology	12-2
12.3. Community Consultations	12-2
12.4. Key Issues Discussed during Consultations	12-13
12.5. Institutional Consultations	12-16
12.6. Consultations by Social Safeguard Team	12-19
12.7. Summary of Issues Discussed	12-21
12.8. Disclosure Requirements	12-24
13. References	13-1

List of Tables

Table 1.1: Project Phases	1-3
Table 2.1: Laws and Acts	2-12
Table 2.2: Treaty or Convention and Responsible Agency	2-13
Table 2.3: Triggering the World Bank Policies	2-21
Table 3.1: Performance Indicators and Timeframes	3-4
Table 3.2: Summary of physical interventions	3-8
Table 3.3: Explanations of Map in Figure 3.4	3-11
Table 3.4: Key Parameters of the BRE	3-11
Table 3.5: Comparison of Design Water Levels and Embankment Crest Levels	3-14
Table 3.6: Comparison of cover layer alternatives above low water level	3-20
Table 3.7: Construction Materials	3-23
Table 3.8: Required Manpower during Construction	3-23
Table 3.9: List of Construction Equipment and Machinery	3-24
Table 3.10: Initial cost estimates of RBIP (in USD)(to be updated)	3-26
Table 3.11: Priority physical works, initial cost estimates (in USD)(to be updated)	3-27
Table 4.1: Criteria for evaluation of alternatives	4-1
Table 4.2: Estimates of annual of loss of land and destruction of structures from bank erosion	4-3

Table 4.3: Analysis of River Bank Protection Alternatives.....	4-8
Table 4.4: Analysis of Embankment and Road Alternatives.....	4-18
Table 4.5: Analysis of Resettlement Site Alternatives.....	4-22
Table 5.1: Seasonal Mean Discharge (1976 - 2011) of Jamuna.....	5-1
Table 5.2: Water levels of Jamuna (1945-2013).....	5-2
Table 5.3: Water level (m) frequency analysis at gauging stations.....	5-3
Table 5.4: Chars/ Shoals in the Project Area	5-8
Table 5.5: Area of rivers in the project area.....	5-9
Table 5.6: Khals of the project area.....	5-11
Table 5.7: Some Notable Flood Disasters of Bangladesh	5-13
Table 5.8: Comparison of Major Flood Impacts in the Jamuna.....	5-13
Table 5.9: General Land Use in Project Area (To be confirmed whether for Priority Reach)	5-19
Table 5.10: Land Types in project area.....	5-19
Table 5.11: Ambient Air Quality Parameters in Project Area.....	5-21
Table 5.12: Bangladesh Standards for Ambient Air Quality.....	5-22
Table 5.13: Ambient Air Quality (WBG EHS Standards)	5-22
Table 5.14: Noise Levels in Project Area	5-23
Table 5.15: Noise Quality Standards of Bangladesh.....	5-23
Table 5.16: World Bank Group EHS Standards for Noise	5-23
Table 5.17: Surface Water Quality of Rivers in Project Area (2006)	5-24
Table 5.18: Bangladesh Water Quality Standards.....	5-24
Table 5.19: Water Quality in Project Area.....	5-25
Table 5.20: Groundwater quality in the Project Area	5-27
Table 5.21: Analysis of Soil Samples collected from Project Area.....	5-28
Table 6.1: Biodiversity in Bangladesh and in Project Area	6-1
Table 6.2: Notable floral and faunal diversity of two Bio-ecological Zones ['Major Rivers' and 'Floodplain (Teesta)']	6-2
Table 6.3: Globally and Nationally Threatened Species of Vertebrates.....	6-4
Table 6.4: Distribution of Ganges River Dolphins in the Jamuna River	6-16
Table 6.5: Fish habitat in study area (in ha)	6-32
Table 6.6: Upazila wise distribution of the fish habitats within the study boundary	6-32
Table 6.7: Upazila wise name and location of different fish habitats of the study area.....	6-36
Table 6.8: Annual fish production of the study area	6-37
Table 6.9: Annual fish production status of different upazilas of the study area	6-38
Table 6.10: Fishing gear efficiency	6-39
Table 6.11: Fishing gears and their operational specification.....	6-41
Table 6.12: Fishing seasonality of different habitats	6-42
Table 6.13: Crafts and gears use for hilsa fishing	6-42
Table 6.14: List of species for conservation significance.....	6-43
Table 6.15: Carp spawn/fertilized egg collection from Jamuna river in 2012 (FRSS, 2012).....	6-46
Table 6.16: Areas of conservation significance (Field Investigation) of the priority area.....	6-47
Table 6.17: Existing fish sanctuaries of the study area (Source: DoF).....	6-48

Table 6.18: Present condition of the khals/canals of the study area-potential fish migration routes	6-52
Table 7.1: Time(s) shifted homes in the past among the households in the priority area	7-1
Table 7.2: Reasons of Displacement.....	7-2
Table 7.3: Number of Upazilla, municipality, union, mauza and village in Sirajganj district	7-5
Table 7.4: Population, male female distribution and other relevant information.....	7-5
Table 7.5: Population in different years in four Upazila of priority area	7-7
Table 7.6: Occupations of the surveyed household head	7-7
Table 7.7: Monthly income of the households in priority area.....	7-8
Table 7.8: Vulnerability status of the households in priority area	7-9
Table 7.9: Possession and ownership of dwelling land of the households in priority area	7-9
Table 7.10: Possession and ownership of commercial land of the households in priority area	7-10
Table 7.11: Possession and ownership of cultivable land of the households	7-10
Table 7.12: Possession and ownership of average dwelling, commercial and cultivable land of the households in priority area	7-11
Table 7.13: Educational qualification of the household head.....	7-11
Table 7.14: Male and Female Literacy at the Upazilla Level in 2011	7-12
Table 7.15: Schools to promote primary education in four Upazila	7-12
Table 7.16: Morbidity pattern in four Upazila.....	7-13
Table 7.17: Health seeking behavior in four Upazila.....	7-14
Table 7.18: Background of persons conducting delivery of pregnant women	7-14
Table 7.19: Sources of drinking water among the surveyed households	7-15
Table 7.20: Sources of water for household chores.....	7-15
Table 7.21: Presence of arsenic in drinking water	7-16
Table 7.22: Types of latrine used	7-16
Table 7.23: Access to electricity	7-16
Table 7.24: Number of bulbs used	7-17
Table 7.25: Roads and railways (kilometer)	7-17
Table 7.26: Types of vehicles registered and non-registered	7-18
Table 7.27: Land Type of the project area.....	7-21
Table 7.28: Agro-ecological zones in project area.....	7-22
Table 7.29: Major Cropping Pattern of the project area by land types	7-24
Table 7.30: Land use and cropping intensity in the project area in 2013-14	7-26
Table 7.31: Economic analysis of major crops grown in the RBIP area.....	7-27
Table 7.32: Irrigation coverage by type of pumps and their numbers in RBIP area	7-28
Table 7.33: Existing numbers of irrigation pumps being used in the RBIP areas (Districts)	7-28
Table 7.34: Rate of fertilizer/pesticides used in different major crops in 2013-14	7-29
Table 7.35: Chemical Fertilizer Used in Project Area in 2013-14	7-29
Table 8.1: Water levels of the Jamuna river corresponding to 100 year flood.....	8-8
Table 8.2: Effect of extreme scenarios for the Jamuna River.....	8-9
Table 9.1: Parameters for Determining Magnitude	9-2
Table 9.2: Criteria for Determining Sensitivity	9-3
Table 9.3: Significance of Impact Criteria	9-3

Table 9.4: Summary of Potential Impacts and their Significance.....	9-4
Table 9.5: Yearly Erosion Rate along Jamuna Right Bank.....	9-8
Table 9.6: Erosion along Jamuna Right Bank.....	9-8
Table 9.7: Predicted Erosion along Jamuna Right Bank over next Thirty Years	9-8
Table 9.8: Length and Number of Breaches in BRE	9-9
Table 9.9: Extent of Floods in BRE-Protected Area	9-10
Table 9.10: Present and Projected Cropping Patterns in RBIP Priority Area.....	9-12
Table 9.11: Existing and Projected Cultivation Area, Yield and Production of Major Crops in RBIP Priority Area.....	9-13
Table 9.12: Crop wise gross returns in without and with project situation.....	9-14
Table 9.13: Usage of Agro-Chemicals	9-14
Table 9.14: Details of Trees to be Affected	9-16
Table 9.15: Trees to be Planted on the Embankment.....	9-17
Table 9.16: Impact of the RBIP on the fish habitat area and annual fish production in different scenarios (for Priority Reach)	9-22
Table 9.17: Net Effect of the RBIP on the fish habitat area and annual fish production in different scenarios (for Priority Reach)	9-22
Table 9.18: Proposed Regulators and Fish Friendly Structures in the Priority Reach.....	9-23
Table 9.19: Land Acquisition Requirement for RBIP Priority Reach	9-25
Table 9.20: Summary of Resettlement Impacts	9-26
Table 9.21: Resettlement Budget for RBIP Priority Reach	9-28
Table 9.22: List of Common Property Resources (CPR) by Location	9-29
Table 9.23: List of Key Bazaars and Boat Jetties.....	9-32
Table 9.24: Total Emissions (in tonnes) from Construction Equipment Usage	9-35
Table 9.25: Greenhouse Gases Emission during Construction (in tonnes)	9-36
Table 9.26: Noise Impact from Construction Activities.....	9-37
Table 9.27: Waste Effluents from Construction Camps and Offices	9-38
Table 9.28: Domestic Solid Waste Generation at Site.....	9-40
Table 9.29: Annual GHG Emissions (t) from Road Traffic.....	9-46
Table 9.30: Predicted Peak Traffic Noise Levels	9-47
Table 10.1: Summary of Jamuna right bank westward shift and changes in width.....	10-2
Table 10.2 Summary Erosion and Accretion along the Jamuna from 1973 to 2014.....	10-3
Table 10.3 Summary Erosion and Accretion along the Jamuna from 1973 to 2014.....	10-6
Table 10.4: Hydropower Dams on Jamuna in the Upstream Riparian Countries.....	10-8
Table 10.5: FAA under climate change and upstream diversions impact (2011-2040)	10-11
Table 11.1: Roles and Responsibilities for ESMP Implementation.....	11-2
Table 11.2: Functions and Responsibilities of the ESDU	11-3
Table 11.3: Management Plans.....	11-7
Table 11.4: Mitigation and Compliance Monitoring Plan – Construction Phase	11-11
Table 11.5: Mitigation and Compliance Monitoring Plan – O&M Phase	11-71
Table 11.6: Effects Monitoring Plan	11-74
Table 11.7: Environmental and Social Trainings.....	11-79
Table 11.8: Cost Estimates for Environmental Management and Monitoring	11-81

Table 12.1: Details of FGDs Conducted by EIA Team	12-3
Table 12.2: Details of Consultation Meetings Conducted by EIA Team	12-11
Table 12.3: Consultation Meetings Conducted by Social Safeguard Team	12-19
Table 12.4: Concerns and Expectations of Stakeholders	12-20
Table 12.5: Issues Raised and Plans to Address the Issues	12-21

List of Figures

Figure 1.1: Jamuna River and Location of Brahmaputra Right-bank Embankment	1-2
Figure 1.2: Location of Priority and Remaining Works under RBIP	1-4
Figure 1.3: Project Influence Area.....	1-7
Figure 2.1: Process of obtaining Clearance certificate from DoE	2-15
Figure 3.1: BRE and Adjacent Areas.....	3-5
Figure 3.2: Program Delineation	3-6
Figure 3.3: Outlines the Overall RBIP Schedule.....	3-10
Figure 3.4: Detailed map with explanation (see explanations in Table 3.3)	3-12
Figure 3.5: Two lane construction road following alignment of future two-lane highway standard road	3-15
Figure 3.6: Estimated riverbank protection from the Teesta River downstream to Jamuna Bridge	3-18
Figure 3.7: The three elements of riverbank protection	3-19
Figure 3.8: Typical cross section of the upper slope treatment.....	3-20
Figure 4.1: Hard Point.....	4-6
Figure 4.2: Revetment	4-6
Figure 4.3: A Typical Groyne	4-7
Figure 4.4: Comparison of two- and four-lane road options.....	4-17
Figure 5.1: Mean Discharge of the Jamuna river(1976-2011) (<i>Source: Bangladesh Water Development Board(BWDB)</i>)	5-2
Figure 5.2: Monthly Temperature Data for Project Area Source: Bangladesh Meteorological Department (BMD)	5-3
Figure 5.3: Yearly Average Temperature in Project Area	5-4
Figure 5.4: Average Monthly Rainfall for Bogra	5-5
Figure 5.5: Average Monthly Wind Speed in Bogra	5-5
Figure 5.6: Average Monthly Relative Humidity in Bogra	5-6
Figure 5.7: Digital Elevation Model (DEM) of the Project Area (Only priority reach to be shown)	5-7
Figure 5.8: Rivers and Khals of the Project Area	5-10
Figure 5.9: Average Monthly Discharge of the Teesta River (<i>Source: BWDB</i>).....	5-11
Figure 5.10: Average Monthly Discharge of the Teesta River (<i>Source: BWDB</i>)	5-12
Figure 5.11: Average Monthly Discharge of the Bengali River (<i>Source: BWDB</i>)	5-12
Figure 5.12: Average Monthly Discharge of the Hurasagar River <i>Source: (BWDB)</i>	5-13
Figure 5.13: Draft Restriction of Inland Waterways of Bangladesh	5-15
Figure 5.14: Pattern of bank erosion on Jamuna River, 1973 to 2013 (<i>Source: Fichtner, 2014</i>)	5-17

Figure 5.15: Monthly Average Groundwater Level at Gaibandha, Bogra and Sirajganj (Source: BWDB)	5-18
Figure 5.16: Land Use in the Project Influence Area (Needs to be improved; show Priority Reach Only)	5-20
Figure 6.1: Bio-ecological Zones in the Project Area	6-2
Figure 6.2: High Density Areas for Ganges River Dolphin (marked with red shade)	6-6
Figure 6.3: Wintering/staging grounds for migratory winter birds in the project area (marked with orange color)	6-7
Figure 6.4: Homestead vegetation in the project area	6-9
Figure 5.6: Agricultural land and planted exotic Eucalyptus trees in the project area	6-9
Figure 6.6: Strong negative linear relationship between to proportions of canopy cover and crop cover across 12 Upazila of the project area	6-10
Figure 6.7: 'Char' land ecosystem in the project area	6-10
Figure 6.8: Relative diversity of major plant species across 12 Upazilas of the project area (based on the presence of major plant species in quadrats).....	6-12
Figure 6.9: Principal uses of 33 major plants in the project area based on FGD	6-13
Figure 6.10: Aquatic Vegetation.....	6-13
Figure 6.11: Relative diversity of common vertebrate wildlife species across 12 Upazilas of the project area (based on FGD).....	6-14
Figure 6.12: Ganges River Dolphin	6-15
Figure 6.13: Relative abundance of Ganges River Dolphin in three transects	6-17
Figure 6.14: Distribution (i.e. high density areas) of Ganges River Dolphin in the project area (marked with red shade).	6-18
Figure 6.15: Flock of Water Birds	6-19
Figure 6.16: Flock of Whiskered Tern - a common bird in the project area	6-20
Figure 6.17: Binocellate Cobra - a common reptilian the project area	6-21
Figure 6.18: Peacock Turtle	6-21
Figure 6.19: Gharial- at its natural Habitat (Source- ARKIVE)	6-22
Figure 6.20: Distribution map of Gharials in 2010 (Source: CARINAM 2010)	6-23
Figure 6.21: Cricket Frog - a common amphibian in the project area.....	6-24
Figure 6.22: Ganges River Dolphin accidentally killed by fishing net in project area	6-28
Figure 6.23: Dense shrubs along the banks of the Jamuna river chars–preferred feeding ground for fish offsprings.....	6-31
Figure 6.24: Location of the major fish habitats in the Study Area (source: IUCN, 2014)	6-34
Figure 6.25: Different fish sub-habitats of the Jamuna River (Source: IWFM, 2011)	6-35
Figure 6.26: CPUE of the different fishing gears	6-40
Figure 6.27: Different types of fishing gears and crafts of the study area	6-41
Figure 6.28: Small Indigenous Species (SIS) of the Jamuna River	6-43
Figure 6.29: Carp spawn collection points of the Jamuna river	6-45
Figure 6.30: Carp spawn collection trend of the Jamuna river	6-46
Figure 6.31: Location of the fish sanctuaries of the study area	6-49
Figure 6.32: Migration pattern of the floodplain fishes of the study area	6-50
Figure 6.33: Potential fish migration routes through fishpass in the priority area	6-51
Figure 6.34: Sariakandi fish pass (September 3, 2014)	6-52

Figure 6.35: Depth and Velocity Preference for Fish (IWFM, 2011)	6-54
Figure 6.36: Movement of Jatka (Hilsa juvenile) into the Jamuna river (source: FFP, DoF/CEGIS) 6-55	
Figure 6.37: Fish catch composition (percent) of the Jamuna River (FRSS, 2012)	6-56
Figure 6.38: Benthos indicator species for fresh water bodies in Bangladesh	6-57
Figure 7.1: River Bank Erosion along Jamuna.....	7-1
Figure 7.2: Population Density in Project Area	7-6
Figure 7.3: Ago-ecological Zones	7-22
Figure 7.4: Cropping Pattern in the Area.....	7-25
Figure 8.1: Observed trend in minimum temperature (Source: Bangladesh Meteorological Department).....	8-4
Figure 8.2: Observed trend in sea level rise as evident from different tidal stations along the coast (Source: CEGIS, 2010).....	8-5
Figure 8.3: Peak flood flow map for base condition, 1998 flood	8-7
Figure 8.4: Peak flood flow map for 2050 with climate change.....	8-7
Figure 9.1: Erosion along Jamuna Banks	9-7
Figure 9.2: Flood Extent due to BRE Breaches (source: Fichtner/BWDB. 2014)	9-11
Figure 9.3: Riverbank Erosion near Chandanbaissa	9-16
Figure 9.4: Location of Regulators and Fish Pass Structures.....	9-24
Figure 10.1: Bankline changes of the Jamuna River 1830 – 2010	10-3
Figure 10.2 Erosion and Accretion of Jamuna from 1973 to 2014	10-4
Figure 10.3 Changes of water, sand, floodplain and charland from 1973-2014	10-5
Figure 10.4: Brahmaputra – Jamuna Catchment Area	10-8
Figure 10.5: Schematic of the Brahmaputra System Model (BSM).....	10-10
Figure 10.6: The five flood risk management measures	10-13
Figure 10.7: Network diagram for impact assessment of induced development	10-14
Figure 12.1: An FGD Conducted at the Project Site	12-2
Figure 12.2: An FGD Conducted at the Project Site	12-3
Figure 13.3: A Meeting Conducted at the Project Site.....	12-3
Figure 12.4: A Meeting with Institutional Stakeholders.....	12-17
Figure 12.5: A Meeting with Institutional Stakeholders.....	12-18

Volume II: Annexes

1. Introduction

The Government of Bangladesh (GoB) through the Bangladesh Water Development Board (BWDB) is planning to initiate the River Bank Improvement Program (RBIP)¹ primarily to rehabilitate and improve the existing right bank embankment of the Brahmaputra River, and also to undertake river bank protection and construction of a road over the embankment. The GoB is seeking assistance from the World Bank (WB) for this purpose.

The program will be implemented in phases and in the first phase, works will be carried out for the 50 km priority reach of the embankment; the remaining works will be implemented under subsequent phase(s). In line with the national regulatory as well as WB policy requirements, and in order to minimize the negative environmental and social impacts of the proposed interventions, the BWDB has conducted a detailed environmental impact assessment (EIA) for the priority reach of the program. This document presents the report of this assessment. An initial environmental examination (IEE) has earlier been prepared and submitted to the Department of Environment (DoE) for clearance.

An environmental management framework (EMF) has also been prepared to guide the detailed environmental assessments of the subsequent phases of the program to be carried out once the detailed design of the remaining works is completed. The EMF is presented under a separate cover.

1.1. Program Background

Bangladesh is mainly comprised of the fertile alluvial floodplains and the delta of the Ganges-Brahmaputra-Meghna river system (Brahmaputra south through Bangladesh, named as the Jamuna). These three rivers combine within the country to form the world's third largest river, the Lower Meghna, which drains into the Bay of Bengal via a constantly changing network of estuaries and tidal creeks. Bangladesh is one of the most vulnerable countries to natural disasters, mainly by upstream river floods during monsoon season and coastal cyclones from the Bay of Bengal. Floods are of recurring phenomena in Bangladesh, and in each year about 22 percent of the country is inundated. Major floods occur when upland flood flows of the three rivers converging to Bangladesh coincide and combine with the heavy monsoon rainfall. It is also difficult to regulate these flood flows as over 90 percent of their river catchments areas are outside the Bangladesh.

Brahmaputra is the Country's largest of the three rivers with highest erosion and bank movements. Prior to the construction of Brahmaputra Right-bank Embankment (BRE), over bank spills along the 220 km stretch of the right bank of the Brahmaputra River used to cause flooding on an area of about 240,000 ha. In early 1960s, the BRE was built to protect from this flooding problem and to foster agricultural growth in the protected area (see **Figure 1.1**).

¹Also denoted as the project or the proposed project in this document.

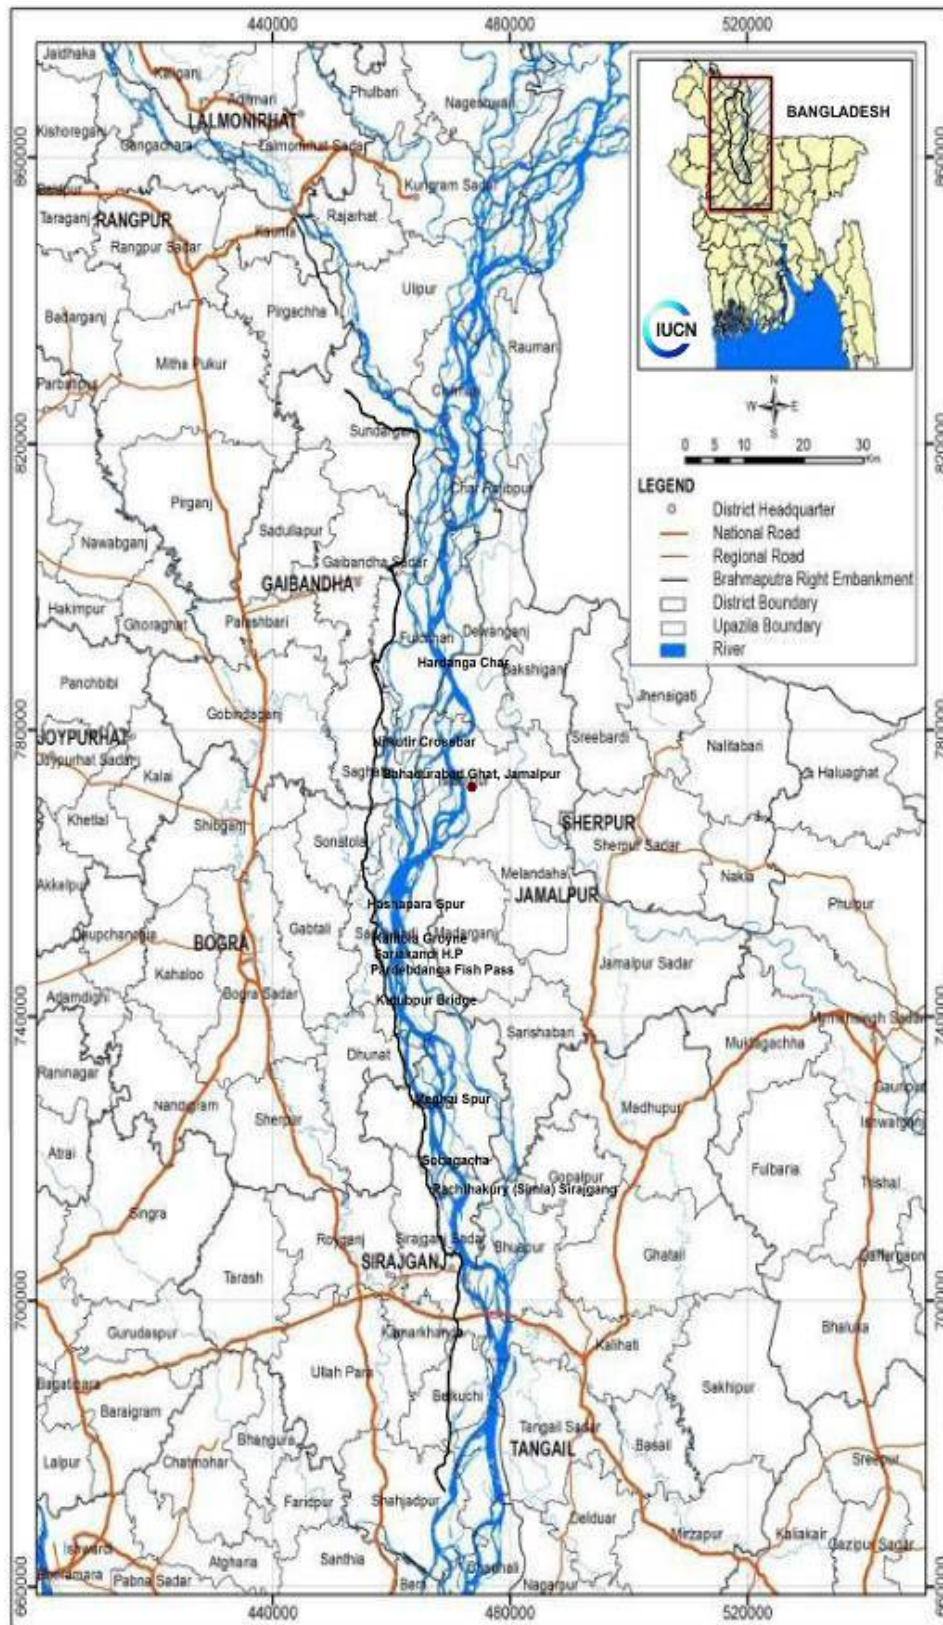


Figure 1.1: Jamuna River and Location of Brahmaputra Right-bank Embankment

The original BRE had a setback of about 1.5 km from the Brahmaputra's right bank and it was allowed to have bank erosion life of 25-30 year span. In the 1970s the embankment started to fall under sporadic erosion attacks. During 1980s, the frequency of the BRE breaches by erosion increased rapidly as longer sections came within the range of rapidly eroding river bends which could cause bank-line erosion rates of several hundred meters per year in early stages of bend formation. To prevent flooding, these breaches were typically closed by local BRE retirements at about 200 meter set-backs. As a result of this minimal set-back distance the BRE has been retired several times in many places and at present perhaps only 50 km of the original BRE has remained in place. Currently, many long stretches of the BRE are very close to the river-bank line. Hence when embankment is breached at many places it is often left open as closing of such breaching is becoming impossible. Consequently, security of area protected by the BRE has been seriously threatened and large areas of land and cities with large population like Sirajganj are exposed to flooding.

1.2. Overview of Proposed Program

The main focus of the BRE rehabilitation work under RBIP is on its length alongside the Brahmaputra/ Jamuna River from Bangabandhu (Jamuna) Bridge to the Teesta River (**Figure 1.1**). The priority works will cover the approximately 50-km long priority reach from Sailabari to Hasnapara (see **Figure 1.2**).

The project's physical works will include:

- River bank protection on portions of the western(right) bank;
- Embankment upgrading, reconstruction and realignment, including adding drainage/control;
- structures (regulators); and
- A new road on the embankment. The project may also include the option of a toll road (highway) associated with the flood embankment.

The project will also provide livelihood and resettlement support to the displaced people. Based on the field reconnaissance and the preliminary morphological assessment, the project works has been divided into three phases as shown in **Table 1.1** below.

Table 1.1: Project Phases

Description	Length (km)	Phase	Tentative Implementation Year
Embankment and riverbank protection from Jamuna Bridge to Sailabari	19	Phase II	2017 to 2022
Embankment and riverbank protection from Sailabari to Hasnapara	50	Phase I	2015 to 2020
Embankment and riverbank protection from Hasnapara to Belka	77	Phase II	2017 to 2022
Road on embankment	146	Phase III	2018 to 2023

The proposed project will be financed by WB with GoB contribution and the project has to comply with the policies and legislative requirement of the World Bank and the GoB.

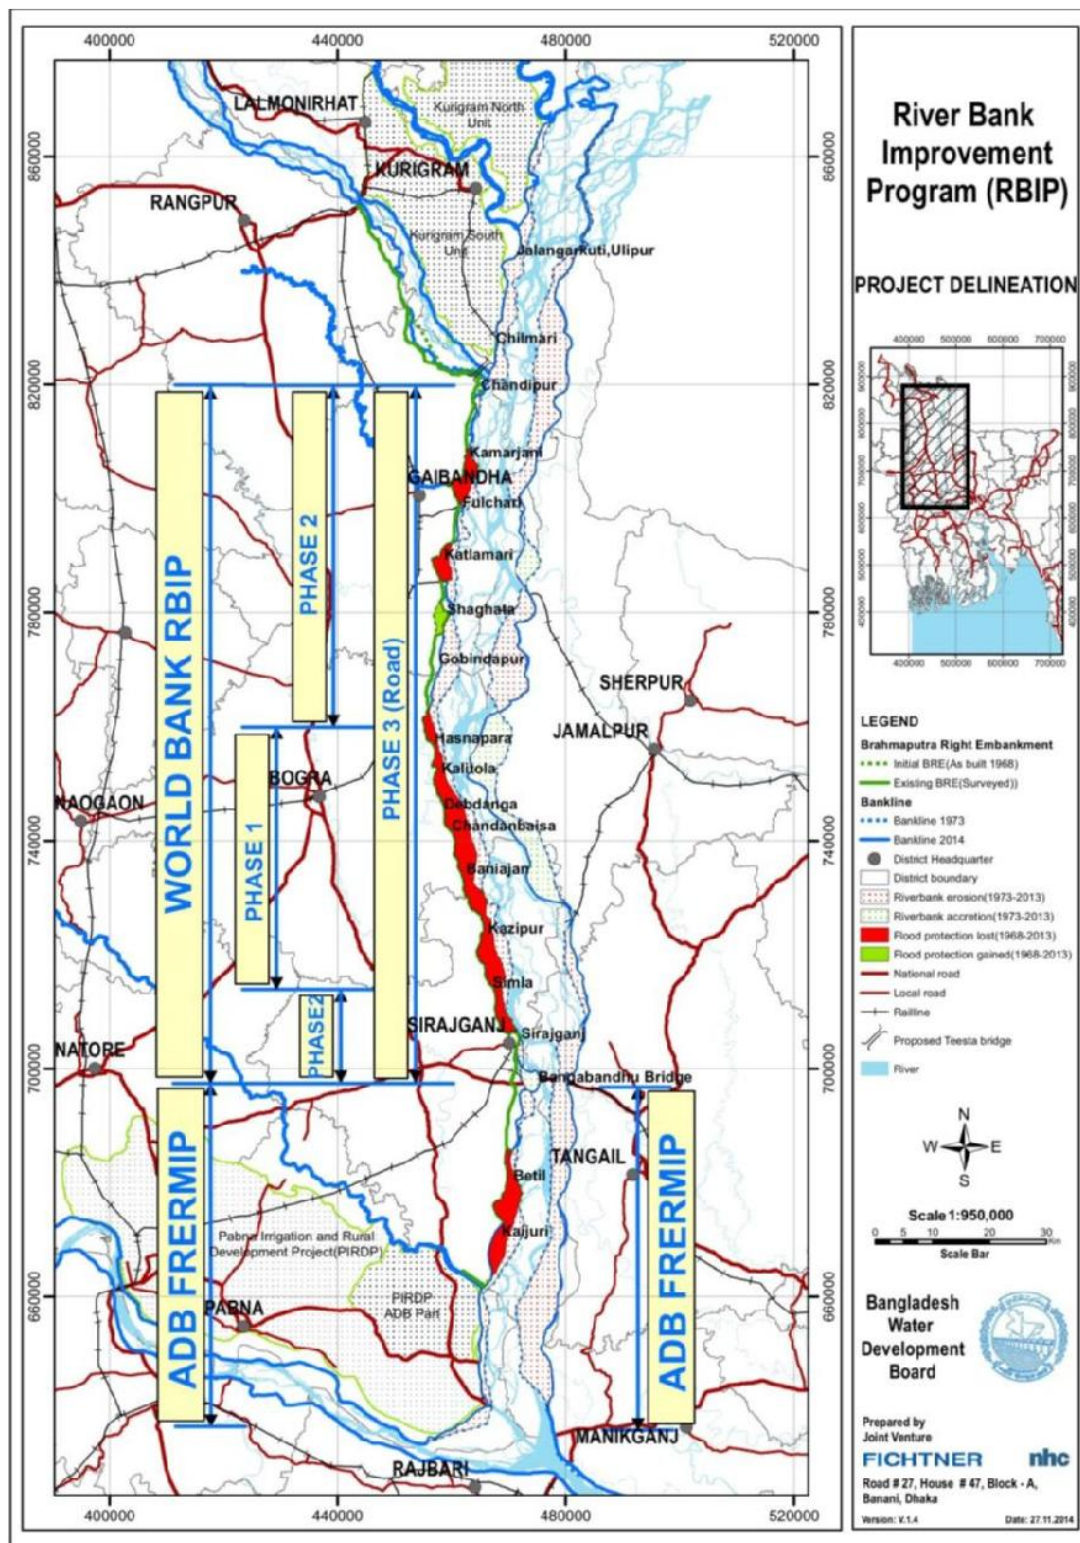


Figure 1.2: Location of Priority and Remaining Works under RBIP

1.3. Study Scope

The present EIA has been conducted for the first phase of the overall RBIP and covers river bank protection along the selected sections of the Jamuna right bank, rehabilitation and reconstruction of the embankment, and associated structures. The EIA studies for the remaining stages will be carried out later.

1.4. Study Methodology

The present EIA has been prepared following the standard methodology consisting of the steps listed below.

- Review of the program details and meeting/discussions with the design team
- Review of the policy and regulatory requirements
- Reconnaissance field visit and initial scoping and screening
- Collecting and analysis of baseline environmental and social data with the help of secondary literature review and field data collection
- Consultations with the stakeholders including beneficiary/affected communities
- Impact assessment
- Preparing environmental management plan
- Compilation of the present EIA.

The detailed methodology is included in **Annex A** whereas the terms of reference of the study are presented in **Annex B**.

1.5. Project Influence Area/Study Area

The influence area of the project has been derived considering areas that are likely to be directly or indirectly affected by the RBIP construction and operation, including but not limited to the extent the project would have an impact on the floodplain areas, lateral fish migration, hydrological network and road network, and the project footprints. The following criteria have been considered to define the influence area:

- Floodplain area: The extent of flood plain area that will be protected from the floods by the flood embankments (BRE) has been primarily considered as the project influence area. This area has been derived based on the latest satellite maps and GoB topographic maps through digital elevation model (DEM).
- Flood Inundation: The extent of flood inundation caused by breaches of BRE. Satellite maps were analyzed for August-September, 2014 to understand the extent of flooding from breaches and internal rivers like the Dharla, Dudhkumar, Teesta, Karotoya, Bengal, Ichamati, and Hurasagar.
- Connectivity: The area is crisscrossed with a network of khals which carry flood waters from Jamuna to the internal rivers on the western side of the project area. The inundation area of the internal rivers was also considered during delineation of influence area. On the other hand, all these rivers are interconnected by numerous khals, tributaries and distributaries forming a hydrological network in the entire northwest region. For example, Mahananda, Punorbhaba which are major rivers of the northwest region, are connected to the Atrai-Karatoya-Bengali

system which drains to the lower Jamuna through the Hurasagar/Baral in the south east corner of the region.

- **Lateral Fish Migration:** Some fish species of Jamuna, such as major carps undergo lateral migration from Jamuna to floodplains for spawning. The migratory routes have been affected by the BRE and the proposed interventions also have a potential to impact these lateral migratory routes. The extent of lateral migration from Jamuna to floodplains is included in the project influence area. The other type of fish migration in Jamuna is longitudinal migration between upstream and downstream (e.g. hilsa migration from sea to Jamuna). Since the BRE and proposed interventions will not have any impacts on the longitudinal migratory routes, these areas are not included in the project influence area.
- **Road network:** Road network and other flow barrier structures have been considered. The western boundary of the influence area is thus the Dhaka-Bogra highway which impedes flood waters to flow westward. The southern boundary is defined as Jamuna bridge since it will be connected with the project road.
- **Significant Habitats (Eco-dynamic area):** There are many significant ecological habitats in the project area especially in the chars. The project will not have any impact on the chars. However, the nearest chars were also considered to be a part of the influence area.
- **Movement of inhabitants – resource harvest, communication, livelihoods.**
- **Project footprints:** Areas that are directly fall under foot prints of the projects, ancillary facilities, temporary construction areas and worker camp sites, borrow areas, access roads to the project facilities for transport of material, etc.; areas that will be affected by the emissions from construction and by operation of traffic.

The Project influence area is shown in **Figure 1.3** (next page).

1.6. Study Team

The EIA study has been carried out by a multi-discipline team of international and national experts. The team comprises Dr. Venkata Nukala as the EIA advisor and reviewer; Mr. Mohammad Omar Khalid, international team leader; Mr. Ishtiaq Uddin Ahmad, study advisor; Mr. Mohammad Shahad Mahabub Chowdhury, study coordinator and fisheries specialist; Mr. Sunil Baran Debroy, technical specialist-water resources; Ms. Bushra Nishat, technical specialist-climate change and environment; Prof. Dr. Monirul I. Khan, social scientist; Dr. Nowsher Ali Sarder, agriculture specialist; Prof. Dr. Monirul H. Khan, ecologist (wildlife); Mr. Junaid Kabir Choudhury, ecologist (vegetation); Mr. A B M Sarowar Alam, field investigator (ecology); Mr. Ashraful Haque, field investigator (ecology); Mr. Animesh Ghose, field investigator (ecology); Mr. Enamul Mazid Khan Siddique, field investigator (sociology); Mr. Sakib Mahmud, field investigator (water resources); Mr. Dibyendu Chattarjee, field investigator (agriculture); Mr. Md. Selim Reza, field investigator (fisheries); Mr. Emran Hassan, geographical information system (GIS) and remote sensing (RS) associate; Mr. Sanjoy Roy, GIS and RS analyst; and Mr. Mahmudul Hasan, GIS assistant.

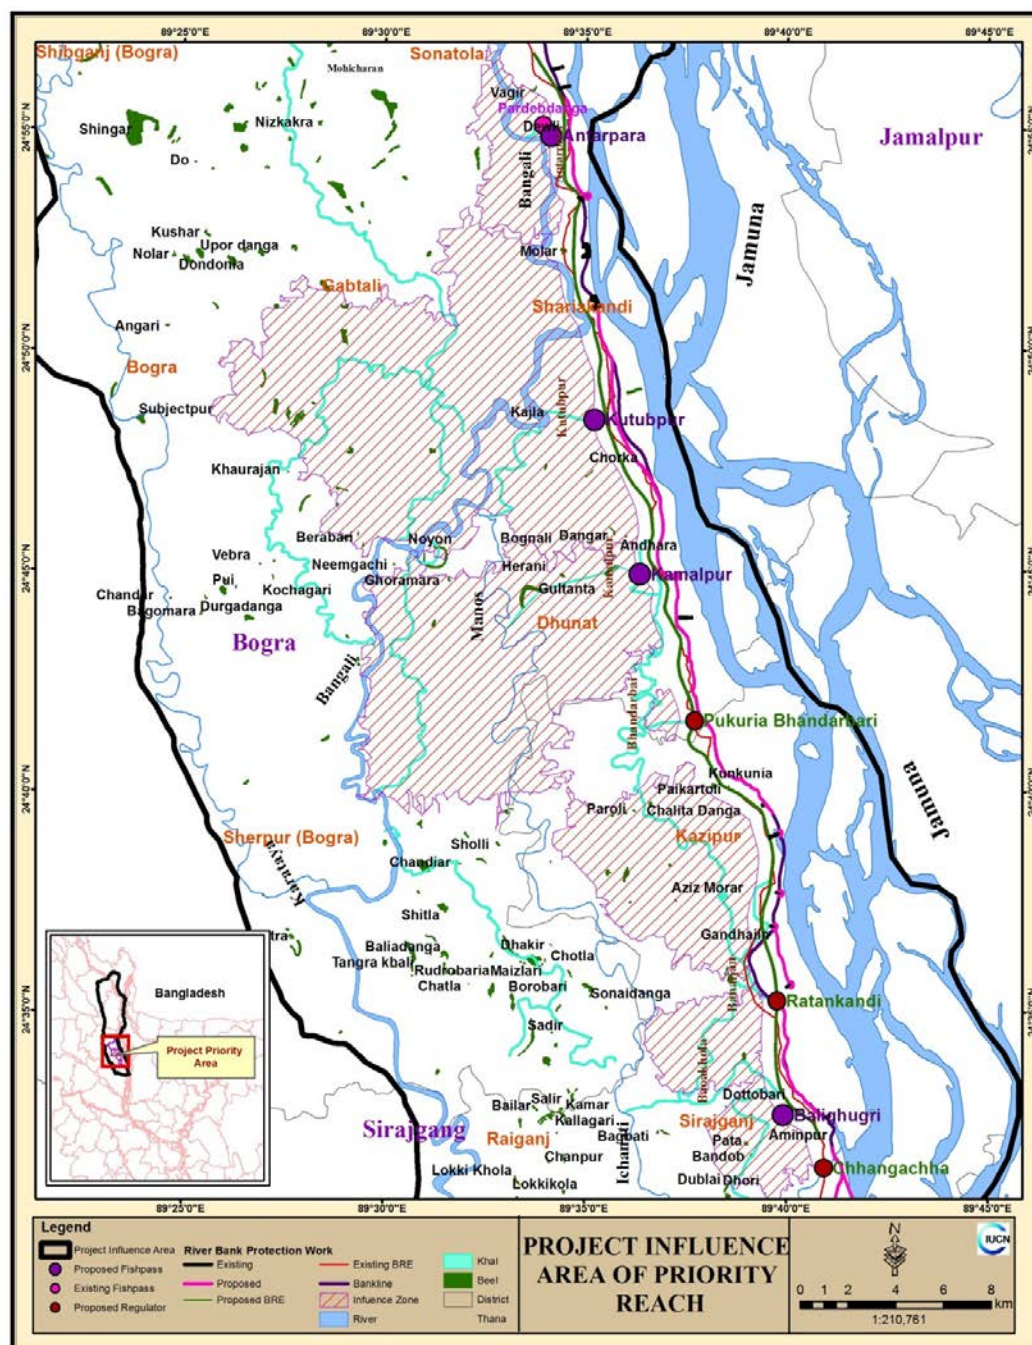


Figure 1.3: Project Influence Area

1.7. Document Structure

Chapter 2 reviews the prevailing WB policies and national regulatory requirements relevant to environmental assessment. **Chapter 3** presents a simplified description of the project, its various components and other salient information relevant for environmental assessment. **Chapter 4** analyses various project alternatives considered during the design phase of the program. **Chapters 5, 6 and 7** describe the present environmental and social

conditions of the project area. **Chapter 8** presents the climate change scenario and its implication for the project. Assessment of potentially negative environmental and social impacts as well as the appropriate mitigation measures to address these negative impacts has been discussed in **Chapter 9**. Cumulative impacts of the RBIP and other possible projects in the area are assessed in **Chapter 10**. The environmental management plan (EMP) which defines the implementation and monitoring mechanism for the mitigation impacts is covered under **Chapter 11**. Finally, **Chapter 12** outlines the stakeholder consultations carried out during the environmental assessment.

2. Policy and Regulatory Review

This Chapter presents a review of the national policy, legal, and regulatory framework relevant to the environmental and social aspects of the Project. Also reviewed in the Chapter are the WB environmental and social safeguard policies.

2.1. National Environmental Laws

The key national policies, strategies, and plans relevant to environmental management are briefly discussed below.

2.1.1. Bangladesh Environment Conservation Act (ECA), 1995

The Environmental Conservation Act (ECA) of 1995 is the main legislative framework relating to environmental protection in Bangladesh. This umbrella Act includes laws for conservation of the environment, improvement of environmental standards, and control and mitigation of environmental pollution. This Act has established the Department of Environment (DoE), and empowers its Director General to take measures as he considers necessary which includes conducting inquiries, preventing probable accidents, advising the Government, coordinating with other authorities or agencies, and collecting and publishing information about environmental pollution. According to this act (Section 12), no industrial unit or project shall be established or undertaken without obtaining, in a manner prescribed by the accompanying Rules, an Environmental Clearance Certificate (ECC) from the Director General of DoE.

In accordance with this Act, the RBIP will need to be cleared by DoE before commencing the project following procedures given in the Environment Conservation Rules (ECR) 1997 (discussed below). Also the Ecologically Critical Areas, defined by DoE under this act, will be considered while planning and designing of the RBIP project interventions.

2.1.2. Bangladesh Environment Conservation Act (ECA), (Amendments) 2010

The ECA 1995 was amended in 2010, which provided clarification of defining wetlands as well as Ecologically Critical Areas and included many important environmental concerns such as conservation of wetlands, hill cutting, ship breaking, and hazardous waste disposal. This amendment empowered the government to enforce more penalties than before. Moreover, affected persons were given provision for putting objections or taking legal actions against the polluters or any entity creating nuisance to affected person.

2.1.3. Bangladesh Environment Conservation Rules (ECR), 1997

The Environment Conservation Rules, 1997 were issued by the Government of Bangladesh in exercise of the power conferred under the Environment Conservation Act (Section 20), 1995. Under these Rules, the following aspects, among others, are covered:

- Declaration of ecologically critical areas
- Classification of industries and projects into four categories
- Procedures for issuing the Environmental Clearance Certificate (ECC)
- Determination of environmental standards.

The Rule 3 defines the factors to be considered in declaring an area 'ecologically critical area' (ECA) as per Section 5 of ECA 95. It empowers the Government to declare an area 'ECA', if it is satisfied that the ecosystem of the area has reached or is threatened to reach a critical state or condition due to environmental degradation. The Government is also empowered to specify which of the operations or processes shall not be carried out or shall not be initiated in the ecologically critical area.

The Rule 7 classifies industrial units and projects into four categories depending on environmental impact and location for the purpose of issuance of ECC. These categories are: Green, Orange A, Orange B, and Red.

All existing industrial units and projects and proposed industrial units and projects, that are considered to be low polluting are categorized under "Green" and shall be granted Environmental Clearance. For proposed industrial units and projects falling in the Orange-A, Orange-B and Red Categories, firstly a site clearance certificate and thereafter an environmental clearance certificate will be required. A detailed description of these four categories of industries has been given in Schedule-1 of ECR'97. Apart from general requirement, for every Red category proposed industrial unit or project, the application must be accompanied with feasibility report, Initial Environmental Examination (IEE), Environmental Impact Assessment (EIA) based on approved ToR by DoE, Environmental Management Plan (EMP). As per ECR'97, water resources development projects fall under 'Red' category project. Therefore RBIP project is 'Red' category project which requires IEE, EIA and EMP for environmental clearance from DoE.

The ECR'97 describes the procedures for obtaining Environmental Clearance Certificates (ECC) from the Department of Environment for different types of proposed units or projects. Any person or organization wishing to establish an industrial unit or project must obtain ECC from the Director General. The application for such certificate must be in the prescribed form together with the prescribed fees laid down in Schedule 13, through the deposit of a Treasury Challan in favor of the Director General. The fees for clearance certificates have been revised in 2010. Rule 8 prescribes the duration of validity of such certificate (three years for green category and one year for other categories) and compulsory requirement for renewal of certificate at least 30 days before expiry of its validity.

2.1.4. Bangladesh Environment Court Act, 2010

Bangladesh Environment Court Act, 2010 has been enacted to resolve the disputes and establishing justice over environmental and social damage raised due to any development activities. This act allows government to take necessary legal action against any parties who creates environmental hazards/ damage to environmentally sensitive areas as well as human society. According to this act, government can take legal actions if any environmental problem occurs due to RBIP interventions.

2.2. Relevant National Policies, Strategies and Plans

2.2.1. National Environment Policy, 1992

The National Environment Policy (NEP) is one of the key policy documents of the Government. The policy addresses 15 sectors in all, in addition to providing directives on the legal framework and institutional arrangements. Marine environment is one of the key

sectors covered in this policy. Regarding water resource development, flood control and irrigation sector, the policy seeks to:

- ensure environmentally-sound utilization of all water resources;
- ensure that water development activities and irrigation networks do not create adverse environmental impact;
- ensure that all steps are taken for flood control, including construction of embankments, dredging of rivers, digging of canals, etc, be environmentally sound at local, zonal and national levels;
- ensure mitigation measures of adverse environmental impact of completed water resources development and flood control projects;
- keep the rivers, canals, ponds, lakes, *haors*, *baors* and all other water bodies and water resources free from pollution;
- ensure sustainable, long-term, environmentally sound and scientific exploitation and management of the underground and surface water resources; and
- conduct environmental impact assessment before undertaking projects for water resources development and management.

The Policy is applicable to the RBIP and the proposed interventions are required to comply with all the policy directives emphasizing particularly on reducing adverse environmental impacts. The EIA studies of the proposed RBIP are required to clearly address the potential impacts and propose mitigation measures.

2.2.2. National Environment Management Action Plan, 1995

The National Environment Management Action Plan (NEMAP, 1995) identifies the main national environmental issues, including those related to the water sector. The main water related national concerns include flood damage, riverbank erosion, environmental degradation of water bodies, increased water pollution, shortage of irrigation water and drainage congestion; various specific regional concerns are also identified.

2.2.3. National Water Policy, 1999

Endorsed by the GoB in 1999, the National Water Policy (NWP) aims to provide guidance to the major players in water sector for ensuring optimal development and management of water. According to the policy, all agencies and departments entrusted with water resource management responsibilities (regulation, planning, construction, operation, and maintenance) are required to enhance environmental amenities and ensure that environmental resources are protected and restored in executing their tasks.

The policy has several clauses related to water resource development projects for ensuring environmental protection. Some of the relevant clauses are:

- Clause 4.5b: Planning and feasibility studies of all projects will follow the Guidelines for Project Assessment, the Guidelines for People's Participation (GPP), the Guidelines for Environmental Impact Assessment, and all other instructions that may be issued from time to time by the Government.
- Clause 4.9b: Measures will be taken to minimize disruption to the natural aquatic environment in streams and water channels.

- Clause 4.9e: Water development plans will not interrupt fish movement and will make adequate provisions in control structures for allowing fish migration and breeding.
- Clause 4.10a: Water development projects should cause minimal disruption to navigation and, where necessary, adequate mitigation measures should be taken.
- Clause 4.12a: Give full consideration to environmental protection, restoration and enhancement measures consistent with National Environmental Management Action Plan (NEMAP) and the National Water Management Plan (NWMP).
- Clause 4.12b: Adhere to a formal environment impact assessment (EIA) process, as set out in EIA guidelines and manuals for water sector projects, in each water resources development project or rehabilitation program of size and scope specified by the Government from time to time.
- Clause 4.13b: Only those water related projects will be taken up for execution that will not interfere with aquatic characteristics of those water bodies.

Most of the above clauses will be applicable to the RBIP.

2.2.4. National Water Management Plan, 2001 (Approved in 2004)

The National Water Management Plan (NWMP) 2001, approved by the National Water Resources Council in 2004, envisions to establish an integrated development, management and use of water resources in Bangladesh over a period of 25 years. Water Resources Planning Organization (WARPO) has been assigned to monitor the national water management plan. The major programs in the Plan have been organized under eight sub-sectoral clusters: i) Institutional Development, ii) Enabling Environment, iii) Main River, iv) Towns and Rural Areas, v) Major Cities; vi) Disaster Management; vii) Agriculture and Water Management, and viii) Environment and Aquatic Resources. Each cluster comprises of a number of individual programs, and a total of 84 sub-sectoral programs have been identified and presented in the investment portfolio.

2.2.5. National Land Use Policy (MoL, 2001)

The National Land Use Policy (NLUP), enacted in 2001, aims at managing land use effectively to support trends in accelerated urbanization, industrialization and diversification of development activities. The NLUP urges that increasing the land area of the country may be not possible through artificial land reclamation process, which is cost-effective only in the long run. Therefore, land use planning should be based on the existing and available land resources. The policy suggests establishing land data banks where, among others, information on accreted riverine and coastal chars will be maintained. Among the 28 policy statements of NLUP, the following are relevant to RBIP:

- forests declared by the Ministry of Environment and Forests will remain as forest lands;
- reclassification of forest lands will be prevented.

The RBIP will be designed in accordance with this Strategy and will comply with the above listed requirements.

2.2.6. National Agriculture Policy, 1999

The overall objective of the National Agriculture Policy is to make the nation self-sufficient in food through increasing production of all crops including cereals and ensure

a dependable food security system for all. The policy particularly stresses on research on the development of improved varieties and technologies for cultivation in water-logged and salinity affected areas. The policy also recognizes that adequate measures should be taken to reduce water-logging, salinity and provide irrigation facilities for crop production.

The proposed RBIP is expected to contribute to achieve the objectives of the agriculture policy.

2.2.7. National Integrated Pest Management Policy

The objective of the integrated pest management (IPM) policy is to enable farmers to grow healthy crops in an increased manner and thereby increase their income on a sustainable basis while improving the environment and community health. To achieve these objectives, the IPM Policy aims to pursue the following strategies:

- to expand IPM on a sustainable basis by establishing a national IPM program; and
- to facilitate co-ordination of all IPM activities in Bangladesh.

2.2.8. National Fisheries Policy, 1996

The National Fisheries Policy (NFP), 1996 recognizes that fish production has declined due to environmental imbalances, adverse environmental impact and improper implementation of fish culture and management programs. The policy particularly focuses on aquaculture and marine fisheries development.

The policy suggests following actions:

- Biodiversity will be maintained in all natural water bodies and in marine environment
- Chemicals harmful to the environment will not be used in fish shrimp farms
- Environment friendly fish shrimp culture technology will be used
- Expand fisheries areas and integrate rice, fish and shrimp cultivation
- Control measures will be taken against activities that have a negative impact on fisheries resources and vice-versa
- Laws will be formulated to ban the disposal of any untreated industrial effluents into the water bodies.

2.2.9. National Livestock Development Policy, 2007

The National Livestock Development Policy (NLDP) has been prepared to address the key challenges and opportunity for a comprehensive sustainable development of the livestock sub-sector by creating an enabling policy framework. As livestock is one of the key assets in livelihoods of the project area, and protection of livestock from floods should be emphasized along with security of human life. The proposed RBIP interventions will contribute to the safety of livestock and thus increase livestock productivity in the project area.

2.2.10. Privat Forest Policy 1994

The policy suggested for extended effort to bring about 20 percent of the country's land under the afforestation programs of the government and private sector by year 2015 by accelerating the pace of the program through the coordinated efforts of the government and NGOs and active participation of the people in order to achieve self-reliance in forest

products and maintenance of ecological balance. The policy viewed equitable distribution of benefits among the people, especially those whose livelihood depend on trees and forests; and people's participation in afforestation programs and incorporation of people's opinions and suggestions in the planning and decision-making process. The people-centered objectives of the policy are: creation of rural employment opportunities and expansion of forest-based rural development sectors; and prevention of illegal occupation of forest lands and other forest offences through people's participation. The policy statements envisage: massive afforestation on marginal public lands through partnerships with local people and NGOs; afforestation of denuded/encroached reserved forests with an agro-forestry model through participation of people and NGOs; giving ownership of a certain amount of land to the tribal people through forest settlement processes; strengthening of the Forest Department; strengthening of educational, training and research facilities; and amendment of laws, rules and regulations relating to the forestry sector and if necessary, promulgation of new laws and rules. Thus, over time the policy has shifted somewhat from total state control to a management regime involving local communities in specific categories of forests.

Because of limited amount of forestland, the policy underscores for effective measures for afforestation in rural areas, in the newly accreted chars, and in the denuded Unclassed State Forest areas of Chittagong Hill Tract and northern zone of the country including the Barind tract. The policy also encourages the private sector participation in afforestation.

2.2.11. National Policy for Safe Water Supply and Sanitation (1998)

The National Drinking Water Supply and Sanitation Policy (1998) goal is accessibility to all of water and sanitation services within the shortest possible time at a price that is affordable to all. The Policy will be achieved through strategies formulated at various levels in consultation with the Ministry of Planning. Policy objectives are (i) to improve the standard of public health and (ii) to ensure an improved environment. Policies for rural and urban areas are presented separately as they differ in institutional aspects, content, and magnitude.

2.2.12. National Policy for Arsenic Mitigation (2004)

The National Policy for Arsenic Mitigation (2004) provides a guideline for mitigating the effect of arsenic on people and environment in a realistic and sustainable way. It supplements the National Water Policy (1998) and the National Policy for Safe Water Supply and Sanitation (1998) in fulfilling national goals related to poverty alleviation, public health, and food security.

The Policy states that access to safe water for drinking and cooking shall be ensured through implementation of alternative water supply options in all arsenic-affected areas. Arsenic mitigation activities under the Policy will focus on public awareness, alternative arsenic safe water supply, diagnoses and management of patients and capacity building. The national arsenic program is to encourage and promote research and development on the impact of arsenic on water supplies, health, food, and agriculture.

2.2.13. National Adaptation Programme of Action (NAPA)

In 2005, the Ministry of Environment and Forest (MoEF), Government of the People's Republic of Bangladesh has prepared the National Adaptation Program of Action (NAPA) for Bangladesh, as a response to the decision of the Seventh Session of the Conference of the Parties (COP7) of the United Nations Framework Convention on Climate Change (UNFCCC). The basic approach to NAPA preparation was along with

the sustainable development goals and objectives of the country where it has recognized the necessity of addressing climate change and environmental issue and natural resource management. The NAPA is the beginning of a long journey to address adverse impacts of climate change including variability and extreme events and to promote sustainable development of the country. There are 15 adaptation strategies suggested to address adverse effects of climate change. Among the 15 adaptation strategies the following strategies are relevant for reducing climate change induced vulnerability:

- Construction of flood shelters, and information and assistance center to cope with enhanced recurrent floods in major floodplains
- Promotion of research on drought, flood and saline tolerant varieties of crops to facilitate adaptation in future.

The RBIP broadly contributes toward achieving the aims and objectives of the climate change adaptation strategies.

2.2.14. Bangladesh Climate Change Strategy and Action Plan (BCCSAP) 2009

The Government of Bangladesh has prepared the Bangladesh Climate Change Strategy and Action Plan (BCCSAP), 2009. The BCCSAP is built on six pillars:

- Food security, social protection and health** to ensure that the poorest and most vulnerable in society, including women and children, are protected from climate change and that all programs focus on the needs of this group for food security, safe housing, employment and access to basic services, including health.
- Comprehensive disaster management** to further strengthen the country's already proven disaster management systems to deal with increasingly frequent and severe natural calamities.
- Infrastructure** to ensure that existing assets (e.g., coastal and river embankments) are well maintained and fit for purpose and that urgently needed infrastructures (cyclone shelters and urban drainage) is put in place to deal with the likely impacts of climate change.
- Research and Knowledge management** to predict that the likely scale and timing of climate change impacts on different sectors of economy and socioeconomic groups; to underpin future investment strategies; and to ensure that Bangladesh is networked into the latest global thinking on climate change.
- Mitigation and low carbon development** to evolve low carbon development options and implement these as the country's economy grows over the coming decades.
- Capacity building and Institutional strengthening** to enhance the capacity government ministries, civil society and private sector to meet the challenge of climate change.

RBIP will contribute towards achieving the objective of pillars such as (i), (ii), (iii), (iv), and (vi).

2.3. Other Relevant Acts, Laws and Rules

2.3.1. Bangladesh Wildlife (Protection and Safety) Act 2012

The Act protects 1,307 species of plants and animals, including 32 species of amphibian, 154 species of reptile, 113 species of mammal, 52 species of fish, 32 species of coral, 137

species of mollusk, 22 species of crustacean, 24 species of insect, six species of rodent, 41 species of plant and 13 species of orchid. Of these, eight amphibian, 58 reptile, 41 bird, and 40 mammal species are listed as endangered in the IUCN Red Data Book (2000). The Act mandates:

- one to three years imprisonment, a fine of BDT 50,000 to 200,000, or both, for wildlife poaching, capturing, trapping, and trading, and for the purchase of wild animals, parts of wild animals, trophies, meat or other products without license. The Act mandates two to seven years imprisonment and BDT 100,000 to 1 million fine or both, for killing an elephant or tiger; and 12 years plus BDT 1.5 million for repeat offenders.
- five years imprisonment and BDT 200,000 fine for killing a cheetah, clouded cheetah, gibbon, sambar deer, crocodile, gaviel, whale, and dolphin.
- two years imprisonment and BDT 200,000 fine for killing a wild bird or migratory bird.
- empowers the Government to create an eco-park, safari park, botanical garden, or breeding ground on any state-owned forest land, land or water-body.
- two years imprisonment for farming, woodcutting, burning, and construction on such reserves.

2.3.2. Bangladesh Wildlife (Preservation) Order (1973) and Act (1974)

The Bangladesh Wildlife Preservation (Amendment) Act 1974 regulates the hunting, killing, capture, trade and export of wild life and wild life products. It designates a list of protected species and game animals. It empowers the Government to declare areas as game reserves, wildlife sanctuaries, and national parks to protect the country's wildlife and provides the following legal definitions:

- Game reserve is defined as an area declared by Government wherein the capture of wild animals is unlawful, to protect wildlife and increase the population of important species;
- National park is defined as an area declared by Government comprising a comparatively large area of outstanding scenic and natural beauty with the primary objective of protection and preservation of scenery, flora, and fauna in their natural state, to which access for public recreation and education, and for scientific research, may be allowed;
- Wildlife sanctuary is defined as an area declared by Government that is closed to hunting, shooting, or trapping of wild animals as an undisturbed breeding ground, primarily for the purpose of protecting all natural resources, including wildlife vegetation, soil, and water.

The Act allows Government to relax any or all specified prohibitions for scientific purposes, for aesthetic enjoyment, or betterment of scenery.

2.3.3. Protection and Conservation of Fish Act (1950)

This Act provides power to the government to: make and apply rules to protect fisheries; prohibit or regulate erection and use of fixed engines; and construction of temporary or permanent weirs, dams, bunds, embankments and other structures. The Act prohibits: destruction of fish by explosives, guns, and bows in inland or coastal areas; destruction of

fish by poisoning, pollution, or effluents. The Act prescribes the seasons during which fishing is allowed, prohibits fishing during spawning periods, and specifies officials having authority to detect breaches of this Act.

2.3.4. East-Bengal Protection and Fish Conservation Act (1950) and Amendments

The East-Bengal Protection and Fish Conservation Act (1950), as amended by the Protection and Conservation of Fish (Amendment) Ordinance (1982) and the Protection and Conservation of Fish (Amendment) Act (1995), provides for the protection and conservation of fish in inland waters of Bangladesh. These instruments define a relatively non-specific framework that simply provides a means for Government to introduce rules to protect inland waters not in private ownership. Among other things, they sanction rule-making regarding destruction of, or any attempt to destroy, fish by poisoning of water or depletion of fisheries by pollution, industrial effluent, or otherwise.

2.3.5. Protection and Conservation of Fish Rules (1985)

These Rules are in line with the overall objectives of the Fisheries Act and its amendments. Section 5 of the Rules states that, “No person shall destroy or make any attempt to destroy any fish by explosives, gun, bow and arrow in inland waters or within coastal waters”. Section 6 states, “No person shall destroy or make any attempt to destroy any fish by poisoning of water or the depletion of fisheries by pollution, by trade effluents or otherwise in inland waters.”

2.3.6. Forestry Acts

Systematic management of forests started in the 1860s after the establishment of a Forest Department in the Province of Bengal. To regulate activities within forests, rules and regulations have been formulated, amended, modified and improved upon over the years. These rules and regulations are formulated on the basis of long-existing acts and policies.

Forest legislation in Bangladesh dates back to 1865, when the first Indian Forest Act was enacted. It provided for protection of tree, prevention of fires, prohibition of cultivation, and grazing in forest areas. Until a comprehensive Indian Forest Act was formulated in 1927, several acts and amendments covering forest administration in British India were enacted and were as follows: (a) Government Forest Act, 1865; (b) Forest Act, 1890; (c) Amending Act, 1891; (d) Indian Forest (Amendment) Act, 1901; (e) Indian Forest (Amendment) Act, 1911; (f) Repealing and Amending Act, 1914; (g) Indian Forest Amendment Act, 1918; and (h) Devolution Act, 1920.

The Forest Act of 1927, as amended with its related rules and regulations, is still the basic law governing forests in Bangladesh. The emphasis of the Act is on the protection of reserved forest. Some important features of the Act are: (i) Under the purview of the Forest Act, all rights or claims over forestlands have been settled at the time of the reservation. The Act prohibits the grant of any new rights of any kind to individuals or communities; (ii) Any activity within the forest reserves is prohibited, unless permitted by the Forest Department; (iii) Most of the violations may result in court cases where the minimum fine is Taka 2,000 and/or two month's rigorous imprisonment; and (iv) The Act empowers the Forest Department to regulate the use of water-courses within Reserve Forests.

2.3.7. Forest Act 1927 (Amendment 2000)

The Forest Act of 1927 as amended in 1989 has its roots in Indian Forest Act, 1878. The Forest Act grants the government several basic powers, largely for conservation and protection of government forests, and limited powers for private forests. The 1927 version of the act was amended in 1989 for extending authority over "any [Government-owned] land suitable for afforestation".

Forest department is the main agency to implement the provisions of the Forest Act. The Act, however, does not specify any sort of institutional structure for the forest or other land holding agencies. It also does not set out any specific policy direction for managing the forests.

Most of the forest lands under the management of forest department are areas declared to be reserved and protected forests under this act. The act empowers the government to regulate the felling, extraction, and transport of forest produce in the country.

2.3.8. Private Forest Act (PFA), 1959

The Private Forest Act of 1959 allows the Government to take over management of improperly managed private forest lands, any private lands that can be afforested, and any land lying fallow for more than three years. The Private Forest Ordinance was originally enacted in 1945, as the Bengal Private Forest Act, and was re-enacted by the Bangladesh (then East Pakistan) in 1949 before being issued as an Act in 1959. These government managed lands under this act are called "vested forests". The Forest Department manages approximately 8,500 hectares in the country as "vested forests". This area is relatively small, but the area historically affected by this law is much larger.

PFA, 1959 empowers the government to require management plans for private forests and to assume control of private forests as vested forests. Government has broad powers to write rules regarding use and protection of vested forests, and apply rules to "controlled forests," which include all private forests subject to any requirement of the Act.

2.3.9. Embankment and Drainage Act, 1952

The *East Bengal Act No. 1*, 1953 has been adapted by the People Republic of Bangladesh, by the Bangladesh Order (adaptation of Existing Laws), 1972 (President's Order No. 48 of 1972). The Act consolidates the laws relating to embankments and drainage providing provision for the construction, maintenance, management, removal and control of embankments and water courses for the better drainage of lands and for their protection from floods, erosion or other damage by water. The specific Sections and Articles relevant to the Project are mentioned below.

- Section 4 (1) of the Act states that the embankment, water-course, and tow-path, earth, pathways, gates, berms and hedges of the embankments shall vest in the Government of the Authority (BWDB).
- Section 56 (1) states that, person will be subject to penalty (500 taka or imprisonment... if he erects, or causes or willfully permits to be erected, any new embankment, or any existing embankment, or obstructs or diverts, or causes or willfully permits to be obstructed or diverted, any water course.
- Section 15 allows for the engineer (engineer in-charge of divisional level BWDB) for constructing new embankment or enlarging, lengthening or repairing existing embankments.

- The other sections of the Act give powers and access to the Government or Authority or Engineers to commence necessary Project activities, for land acquisition (through the Deputy Commissioner), and site clearing activities including removal of trees or houses (if necessary).

2.3.10. Bangladesh Labor Act, 2006

The Bangladesh Labor Act, 2006 provides the guidance of employer's extent of responsibility and workmen's extent of right to get compensation in case of injury by accident while working. Some of the relevant Sections are:

- **Section 150. Employer's Liability for Compensation:** (1) If personal injury is caused to a workman by accident arising out of and in the course of his employment, his employer shall be liable to pay compensation in accordance with the provisions of this Act; and (2) Provided that the employer shall not be so liable - (a) in respect of any injury which does not result in the total or partial disablement of the workman for a period exceeding three days; (b) in respect of any injury, not resulting in death or permanent total disablement, caused by an accident which is directly attributable to - (i) the workman having been at the time thereof under the influence of drink or drugs, or (ii) the willful disobedience of the workman to an order expressly given, or to a rule expressly framed, for the purpose of securing the safety of workmen, or (iii) the willful removal or disregard by the workman of any safety guard or other device which he knew to have been provided for the purpose of securing the safety of workmen.
- **Section 151. (1) Amount of Compensation:** Subject to the provisions of this Act, the amount of compensation shall be as follows, namely :- (a) where death results from the injury, an amount equal to fifty cent of the monthly wages of the deceased workman multiplied by the relevant factor; or an amount of fifty thousand taka, whichever is more; (b) where permanent disablement results from the injury an amount equal to sixty per cent of the monthly wages of the injured workman multiplied by the relevant factor.

2.3.11. Bangladesh National Building Code, 2006

The Bangladesh National Building Code (BNBC) clearly sets out the constructional responsibilities according to which the relevant authority of a particular construction site shall adopt some precautionary measures to ensure the safety of the workmen. According to section 1.2.1 of chapter 1 of part 7, "In a construction or demolition work, the terms of contract between the owner and the contractor and between a consultant and the owner shall be clearly defined and put in writing. These however will not absolve the owner from any of his responsibilities under the various provisions of this Code and other applicable regulations and bye-laws. The terms of contract between the owner and the contractor will determine the responsibilities and liabilities of either party in the concerned matters, within the provisions of the relevant Acts and Codes (e.g.) the Employers' Liability Act, 1938, the Factories Act 1965, the Fatal Accident Act, 1955 and Workmen's Compensation Act 1923". (After the introduction of the Bangladesh Labor Act, 2006, these Acts have been repealed).

The BNBC also stipulates the general duties of the employer to the public as well as workers. According to this section, "All equipment and safeguards required for the construction work such as temporary stair, ladder, ramp, scaffold, hoist, run way, barricade, chute, lift shall be substantially constructed and erected so as not to create any

unsafe situation for the workmen using them or the workmen and general public passing under, on or near them”.

The Code also clarifies the issue of safety of workmen during construction and with relation to this, set out the details about the different safety tools of specified standard. In relation with the health hazards of the workers during construction, this chapter describes the nature of the different health hazards that normally occur in the site during construction and at the same time specifies the specific measures to be taken to prevent such health hazards. According to this chapter, exhaust ventilation, use of protective devices, medical checkups etc. are the measures to be taken by the particular employer to ensure a healthy workplace for the workers.

To prevent workers falling from heights, the Code sets out the detailed requirements on the formation and use of scaffolding. According to section 3.9.2 of the same chapter, “every temporary floor openings shall either have railing of at least 900 mm height or shall be constantly attended. Every floor hole shall be guarded by either a railing with toe board or a hinged cover. Alternatively, the hole may be constantly attended or protected by a removable railing. Every stairway floor opening shall be guarded by railing at least 900 mm high on the exposed sides except at entrance to stairway. Every ladder way floor opening or platform shall be guarded by a guard railing with toe board except at entrance to opening. Every open sided floor or platform 1.2 meters or more above adjacent ground level shall be guarded by a railing on all open sides except where there is entrance to ramp, stairway or fixed ladder.....the above precautions shall also be taken near the open edges of the floors and the roofs”.

2.3.12. Other Laws

There are a number of other laws and regulations applicable which are relevant for the project. These are presented in the **Table 2.1** below.

Table 2.1: Laws and Acts

Act/Law/Ordinance	Brief description	Responsible Agency
The Vehicle Act (1927) and the Motor Vehicles Ordinance (1983)	Provides rules for exhaust emission, air and noise pollution and road and traffic safety	Road Authority
Rules for Removal of Wrecks and Obstructions in inland Navigable Water Ways (1973)	Rules for removal of wrecks and obstructions	IBWTA
The Water Supply and Sanitation Act (1996)	Regulates the management and control of water supply and sanitation in urban areas.	MoLG, RD&C
The Ground Water Management Ordinance (1985)	Describes the management of ground water resources and licensing of tube wells	Upazila Parishad
The Private Forests Ordinance (1959)	Deals with the conservation of private forests and afforestation of wastelands.	MoEF
The Antiquities Act (1968)	Describes the preservation of cultural heritage, historic monuments and protected sites	DoArch

2.4. International Treaties Signed by GoB

Bangladesh has signed most international treaties, conventions and protocols on environment, pollution control, bio-diversity conservation and climate change, including the Ramsar Convention, the Bonn Convention on migratory birds, the Rio de Janeiro Convention on biodiversity conservation and the Kyoto protocol on climate change. An overview of the relevant international treaties signed by GoB is shown in **Table 2.2**.

Table 2.2: Treaty or Convention and Responsible Agency

Treaty	Year	Brief Description	Relevant Department
Protection of birds (Paris)	1950	Protection of birds in wild state	DoE/DoF
Ramsar Convention	1971	Protection of wetlands	DoE/DoF
Protocol Waterfowl Habitat	1982	Amendment of Ramsar Convention to protect specific habitats for waterfowl	DoE/DoF
World Cultural and Natural Heritage (Paris)	1972	Protection of major cultural and natural monuments	DoArch
CITES convention	1973	Ban and restrictions on international trade in endangered species of wild fauna and flora	DoE/DoF
Bonn Convention	1979	Conservation of migratory species of wild animals	DoE/DoF
Prevention and Control of Occupational hazards	1974	Protect workers against occupational exposure to carcinogenic substances and agents	MoH
Occupational hazards due to air pollution, noise & vibration (Geneva)	1977	Protect workers against occupational hazards in the working environment	MoH
Occupational safety and health in working environment (Geneva)	1981	Prevent accidents and injury to health by minimizing hazards in the working environment	MoH
Occupational Health services	1985	To promote a safe and healthy working environment	MoH
Convention on oil pollution damage (Brussels)	1969	Civil liability on oil pollution damage from ships	DoE/MoS
Civil liability on transport of dangerous goods (Geneva)	1989	Safe methods for transport of dangerous goods by road, railway and inland vessels	MoC
Safety in use of chemicals during work	1990	Occupational safety of use of chemicals in the work place	DoE
Convention on oil pollution	1990	Legal framework and preparedness for control of oil pollution	DoE/MoS
Vienna convention	1985	Protection of ozone layer	DoE
London Protocol	1990	Control of global emissions that deplete ozone layer	DoE
UN framework convention on climate change (Rio de Janeiro)	1992	Regulation of greenhouse gases emissions	DoE

Treaty	Year	Brief Description	Relevant Department
Convention on Biological Diversity (Rio de Janeiro)	1992	Conservation of bio-diversity, sustainable use of its components and access to genetic resources	DoE
International Convention on Climate Changes (Kyoto Protocol)	1997	International treaty on climate change and emission of greenhouse gases	DoE
Protocol on biological safety (Cartagena protocol)	2000	Biological safety in transport and use of genetically modified organisms	DoE

2.5. Implication of GoB Policies, Acts and Rules on RBIP

The legislations relevant for environmental assessment for RBIP are the Environmental Conservation Act 1995 (ECA'95) and the Environmental Conservation Rules 1997 (ECR'97). Department of Environment (DoE), under the Ministry of Environment and Forest (MoEF), is the regulatory body responsible for enforcing the ECA'95 and ECR'97. According to the Rule 7 (1) of the Environmental Conservation Rules 1997; for the purpose of issuance of Environmental Clearance Certificate (ECC), every industrial units or projects, in consideration of their site and impact on the environment, will be classified into the four categories and they are: Category I (green), Category II (Orange-A), Category III (Orange B) and Category IV (Red). According to the categorization, all construction/reconstruction/expansion of flood control embankment/polder/dykes falls under Red Category. Therefore RBIP falls under the '**Red**' category.

It is the responsibility of the proponent to conduct an EIA of development proposal, the responsibility to review EIAs for the purpose of issuing Environmental Clearance Certificate rests on DoE. The procedures for "Red" Category include submission of:

- An Initial Environmental Examination (IEE)
- An Environmental Impact Assessment (EIA)
- An Environmental Management Plan (EMP)

Environment clearance has to be obtained by the respective implementing agency or project proponent (private sector) from Department of Environment (DoE). The environmental clearance procedure for Red Category projects can be summarized as follows:

Application to DoE → Obtaining Site Clearance → Applying for Environmental Clearance → Obtaining Environmental Clearance → Clearance Subject to annual renewal.

The Department of Environment (DoE), the technical arm of the Ministry of Environment and Forest (MoEF) is the regulatory body and the enforcement agency of all environmental related activities. Like all other projects, this project also needs to meet the requirement of the DOE. An environmental assessment (EA) study needs to be undertaken for obtaining the environmental clearance. As per ECR 1997, the proposed RBIP falls under the Red Category and hence, necessitates a full-scale EIA. Steps to be followed for obtaining Environmental Clearance Certificate (ECC) in connection with the construction/ reconstruction / extension of bridges over 100 meter in length (under Red Category) from DOE are outlined in **Figure 2.1**.

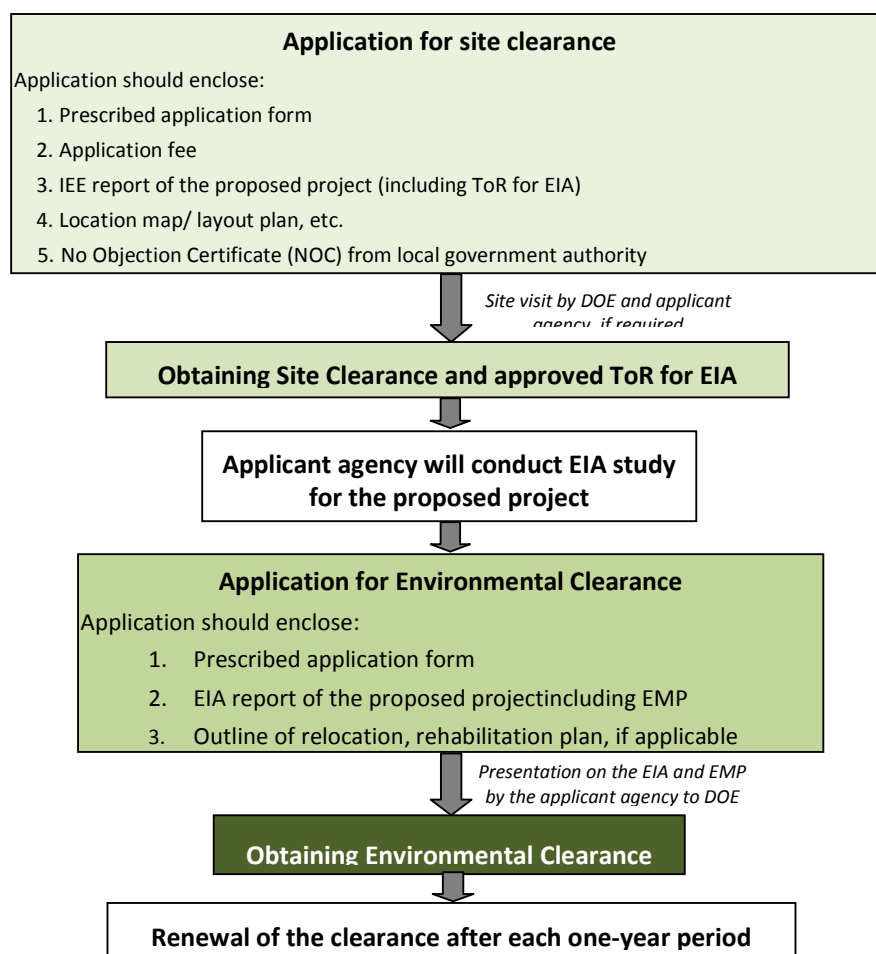


Figure 2.1: Process of obtaining Clearance certificate from DoE

Public participation or consultation is not a condition in the ECR 1997 and or EIA Guidelines, however, DOE prefers the proponent to engage in public participation and put conditions while providing site clearance or during the approval of the EIA TOR.

2.6. World Bank's Environmental Safeguard Policies

The World Bank has developed a number of Safeguard Policies to ensure that all possible impacts are considered and mitigation measures are spelled out prior to the implementation of any proposed project. These policies ensure that the quality of operations is uniform across different settings worldwide. If the decision is taken that a Safeguard Policy should be applied, mitigation measures and plans must be developed and in place before the implementation of a proposed project.

The Bank requires environmental screening and classification for all investment projects² (including ones financed by Trust Funds, Project Preparation Facilities and Guarantees) proposed for Bank financing, to help ensure that they are environmentally and socially sound and sustainable. Screening and classification take into account the natural environment (air, water, and land); human health and safety; social aspects (involuntary resettlement, Indigenous Peoples); cultural property; and trans-boundary and global environmental aspects.

The objectives of environmental screening and classification are: to evaluate the environmental risks associated with a proposed operation; to determine the depth and breadth of Environmental Assessment (EA); and to recommend an appropriate choice of EA instrument(s) suitable for a given project. The Bank recognizes that environmental screening and classification is not absolute and involves professional judgment on a case by case basis. When screening, careful consideration needs to be given to potential environmental impacts and risks associated with the proposed project. Judgment is exercised with reference to the policy expectations and guidance; real impacts on the ground; and established regional and Bank-wide precedence and good practice.

2.6.1. Environmental Assessment (OP 4.01)

EA requirement. The World Bank requires environmental assessment (EA) of projects proposed for Bank support to ensure that they are environmentally sound and sustainable, and thus to improve decision making. The Bank Policy OP 4.1 considers that EA is a process whose breadth, depth, and type of analysis depend on the nature, scale, and potential environmental impact of the proposed project. EA evaluates a project's potential environmental risks and impacts in its area of influence; examines project alternatives; identifies ways of improving project selection, siting, planning, design, and implementation by preventing, minimizing, mitigating, or compensating for adverse environmental impacts and enhancing positive impacts; and includes the process of mitigating and managing adverse environmental impacts throughout project implementation. EA takes into account the natural environment (air, water and land); human health and safety; social aspects (involuntary resettlement, indigenous peoples and physical cultural resources); and trans-boundary and global environmental aspects. The Bank Policy also envisages that the borrower Government is responsible for carrying out the EA and the Bank advises the borrower on the Bank's EA requirements.

The present EMF has been prepared in compliance with this OP.

EA classification. The World Bank classifies the proposed project into one of the four categories, depending on the type, location, sensitivity, and scale of the project and the nature and magnitude of its potential environmental impacts. These categories are defined below.

Category A: A proposed project is classified as Category A if it is likely to have significant adverse environmental impacts that are sensitive, diverse, or unprecedented. These impacts may affect an area broader than the sites or facilities subject to physical works.

Category B: A proposed project is classified as Category B if its potential adverse environmental impacts on human populations or environmentally important areas--including wetlands, forests, grasslands, and other natural habitats--are less adverse than those of Category A projects.

Category C: A proposed project is classified as Category C if it is likely to have minimal or no adverse environmental impacts. Beyond screening, no further EA action is required for a Category C project.

Category FI: A proposed project is classified as Category FI if it involves investment of Bank funds through a financial intermediary (FI), in subprojects that may result in adverse environmental impacts.

The proposed RBIP has been classified as Category A, since some of the potential impacts are likely to be significant and diverse.

2.6.2. Natural Habitats (OP 4.04)

The Policy describes the conservation of natural habitats, like other measures that protect and enhance the environment, to be essential for long-term sustainable development. The Bank therefore supports the protection, maintenance, and rehabilitation of natural habitats and their functions in its economic and sector work, project financing, and policy dialogue. The Bank also supports, and expects borrowers to apply a precautionary approach to natural resource management to ensure opportunities for environmentally sustainable development. The Bank promotes and supports natural habitat conservation and improved land use by financing projects designed to integrate into national and regional development the conservation of natural habitats and the maintenance of ecological functions. Furthermore, the Bank promotes the rehabilitation of degraded natural habitats. The Bank does not support projects that involve the significant conversion or degradation of critical natural habitats.

The activities under the proposed project could potentially alter the natural habitat hence this policy is triggered. Habitat restoration and enhancement measures will be included in the project design to mitigate and or compensate any adverse impacts on the natural habitat.

2.6.3. Physical Cultural Resources (OP 4.11)

The World Bank's general policy regarding cultural properties is to assist in their preservation, and to seek to avoid their elimination. The specific aspects of the Policy are given below.²

- The Bank normally declines to finance projects that will significantly damage non-replicable cultural property, and will assist only those projects that are sited or designed so as to prevent such damage.
- The Bank will assist in the protection and enhancement of cultural properties encountered in Bank-financed projects, rather than leaving that protection to chance. In some cases, the project is best relocated in order that sites and structures can be preserved, studied, and restored intact in situ. In other cases, structures can be relocated, preserved, studied, and restored on alternate sites. Often, scientific study, selective salvage, and museum preservation before destruction is all that is necessary. Most such projects should include the training and strengthening of institutions entrusted with safeguarding a nation's cultural patrimony. Such activities should be directly included in the scope of the project, rather than being postponed for some possible future action, and the costs are to be internalized in computing overall project costs.
- Deviations from this policy may be justified only where expected project benefits are great, and the loss of or damage to cultural property is judged by competent authorities to be unavoidable, minor, or otherwise acceptable. Specific details of the justification should be discussed in project documents.

² Excerpts from the OPN 11.03.WB Operational Manual. September 1986.

- This policy pertains to any project in which the Bank is involved, irrespective of whether the Bank is itself financing the part of the project that may affect cultural property.

This OP is not triggered since no cultural or archaeological resources are known to exist in the vicinity of the Project (ie, priority reach of RBIP) nor have any such resources been identified during field investigations. However, ‘chance find’ procedures will be included in the EMP.

2.6.4. Forests (OP 4.36)

This Policy recognizes the need to reduce deforestation and promote sustainable forest conservation and management in reducing poverty. The Bank believes that forests are very much essential for poverty reduction and sustainable development irrespective of their location in the world. The Bank assists borrowers with forest restoration activities that maintain or enhance biodiversity and ecosystem functionality. The Bank also assists borrowers with the establishment and sustainable management of environmentally appropriate, socially beneficial, and economically viable forest plantations to help meet growing demands for forest goods and services. The Bank does not finance projects that, in its opinion, would involve significant conversion or degradation of critical forest areas or related critical natural habitats. Furthermore, the Bank does not finance projects that contravene applicable international environmental agreements.

This OP is not triggered since the proposed Project is not located in any forested area and will therefore not have any direct impact on forests.

2.6.5. Projects on International Waterways (OP 7.50)

Projects on international waterways may affect the relations between the World Bank and its borrowers, and between riparian states. Therefore, the Bank attaches great importance to the riparian making appropriate agreements or arrangements for the entire waterway, or parts thereof, and stands ready to assist in this regard. A borrower must notify other riparian of planned projects that could affect water quality or quantity, sufficiently far in advance to allow them to review the plans and raise any concerns or objections.

This Policy is triggered since Brahmaputra/Jamuna is an international waterway. However, as Bangladesh is the most downstream country of the Brahmaputra/ Jamuna River and the proposed project is not expected to adversely change the quality or quantity of water flow to the other riparians, the notification requirement is waived.

2.6.6. Pest Management (OP 4.09)

Through this OP, the WB supports a strategy that promotes use of biological or environmental control methods and reduces reliance on synthetic chemical pesticides. Rural development and health sector projects have to avoid using harmful pesticides. Other pesticides can be used, but only as an element of an Integrated Pest Management Plan (IPMP) that emphasizes environmental and biological controls.

Though increase in agriculture production hence an increased usage of chemical pesticides and fertilizers is not included in the project objectives, such a consequence of the project cannot be ruled out. Hence this policy is triggered.

2.6.7. Indigenous Peoples (OP 4.10)

For purposes of this Policy, the term ‘Indigenous Peoples’ is used in a generic sense to refer to a distinct, vulnerable, social and cultural group possessing the following characteristics in varying degrees:³

- self-identification as members of a distinct indigenous cultural group and recognition of this identity by others;
- collective attachment to geographically distinct habitats or ancestral territories in the project area and to the natural resources in these habitats and territories;
- customary cultural, economic, social, or political institutions that are separate from those of the dominant society and culture; and
- an indigenous language, often different from the official language of the country or region.

The OP defines the process to be followed if the project affects the indigenous people.

The social impact assessment of the RBIP indicates that there are no indigenous communities residing in the project area and therefore, no impacts on them are expected under the project. This has been confirmed in the priority reach where investments will be carried out under the proposed project. Therefore this OP is not triggered for the priority reach.

2.6.8. Involuntary Resettlement (OP 4.12)

The WB’s experience indicates that involuntary resettlement under development projects, if unmitigated, often gives rise to severe economic, social, and environmental risks: production systems are dismantled; people face impoverishment when their productive assets or income sources are lost; people are relocated to environments where their productive skills may be less applicable and the competition for resources greater; community institutions and social networks are weakened; kin groups are dispersed; and cultural identity, traditional authority, and the potential for mutual help are diminished or lost. This policy includes safeguards to address and mitigate these impoverishment risks.⁴

The overall objectives of the Policy are given below.

- Involuntary resettlement should be avoided where feasible, or minimized, exploring all viable alternative project designs.
- Where it is not feasible to avoid resettlement, resettlement activities should be conceived and executed as sustainable development programs, providing sufficient investment resources to enable the persons displaced by the project to share in project benefits. Displaced persons should be meaningfully consulted and should have opportunities to participate in planning and implementing resettlement programs.
- Displaced persons should be assisted in their efforts to improve their livelihoods and standards of living or at least to restore them, in real terms, to pre-displacement levels or to levels prevailing prior to the beginning of project implementation, whichever is higher.

³ Excerpts from the OP 4.10.WB Operational Manual. July 2005.

⁴ Excerpts from WB OP 4.12.WB Operational Manual. December 2001.

Since the proposed Project will involve land acquisition as well as displacement of houses and other assets, a Resettlement Action Plan (RAP) has been prepared, under a separate cover, in accordance with this Policy.

2.6.9. Projects in Disputed Areas (OP 7.60)

Projects in disputed areas may raise a number of delicate problems affecting relations not only between the Bank and its member countries, but also between the borrower and one or more neighboring countries. In order not to prejudice the position of either the Bank or the countries concerned, any dispute over an area in which a proposed project is located is dealt with at the earliest possible stage.

The Bank may proceed with a project in a disputed area if the governments concerned agree that, pending the settlement of the dispute, the project proposed for country A should go forward without prejudice to the claims of country B.⁵

This OP is not triggered since no part of the Project area is located in any disputed territory.

2.6.10. Safety of Dams (OP 4.37)

The Policy seeks to ensure that appropriate measures are taken and sufficient resources provided for the safety of dams the WB finances. However this OP is not relevant since the proposed Project does not involve construction of dams. Nonetheless, while the embankments do not qualify as “dams”, many of the same risks and concerns associated with potential dam failure are also relevant in the context of the embankments. The project has therefore convened an international Panel of Experts to provide guidance on diverse project aspects including technical, environmental and social. The technical reviews to be provided by the panel will look at embankment safety aspects and provide guidance to BWDB on design aspects to minimize structural risks of breaching or failure of the embankments. Safety monitoring and emergency management plans will also be developed and implemented through the project.

2.6.11. Access to Information

This BP deals with the World Bank policy on disclosure of information. It is a mandatory procedure to be followed by the borrower and Bank and supports public access to information on environmental and social aspects of projects.

Once finalized, the EMF and Bengali translation of its executive summary will be disclosed to the public and will also be available on the official website of the BWDB. EMF will also be sent to the WB InfoShop.

2.6.12. Environment, Health and Safety Guidelines

The Environment, Health, and Safety (EHS) Guidelines⁶ contain the performance levels and measures that are generally considered to be achievable in new facilities or project by existing technology at reasonable costs. These Guidelines will be applicable to the Project.

⁵ Excerpts from the OP 7.60.WB Operational Manual. November 1994.

⁶ EHS Guidelines available at:
<http://www.gcgf.org/wps/wcm/connect/554e8d80488658e4b76af76a6515bb18/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES>

2.6.13. Applicable World Bank Policies

The project is classified as a Category A project, due to the complexity of environmental issues associated with project activities involving major civil works by reconstruction and rehabilitation of the embankment to protect against inundation. Since the area is of high economic value and ecological sensitivity, certain negative environmental impacts may occur during the implementation and operational phase of the project. There may be localized impacts on the natural habitats especially on the fish spawning areas during the implementation of the civil works.

The environment assessment (OP/BP 4.01), natural habitats (OP/BP 4.04), pest management (OP 4.09), involuntary resettlement (OP 4.12), and international waterways (OP 7.50) have been triggered for the proposed operation. Although no direct impacts on physical cultural resources are expected, screening mechanism incorporated into the EA process will identify subprojects with archeological, paleontological, historical, religious, or unique natural values. The status of the environmental and social safeguard policies of the World Bank is provided below in **Table 2.3**.

Table 2.3: Triggering the World Bank Policies

Directive	Policy	Triggered	Comments
Environmental Assessment	OP/BP 4.01	Yes	As the Project falls into Category A, the present full EIA has been carried out.
Natural Habitats	OP/BP 4.04	Yes	The project has potential to cause conversion of habitat and impair associated ecological functions by: altering aquatic habitat through placing geo-bags and concrete blocks along the river bank; disturbing aquatic habitat during sand extraction from river banks; changing/interrupting ecological connectivity between main Jamuna river and inland smaller rivers, water ponds (beels), and water channels (khals). Appropriate mitigation and control measures have been included in the project design and EIA to address these potential impacts.
Indigenous Peoples	OP 4.10	No	Not triggered since no Indigenous People or ethnic minorities are living in the area.
Physical Cultural Resources (PCR)	OP 4.11	No	Not triggered since no PCR are known to exist in the project corridor. Chance find procedures have nonetheless been included in the environmental management plan (EMP).
Involuntary Resettlement	OP/BP 4.12	Yes	Triggered. About 370 ha of land will be needed for the construction of about 50 km long embankment and about 15,558 persons from 3,639 households are likely to be directly affected because of this land take. A Resettlement Action Plan (RAP) has been developed in line with relevant national laws and World Bank OP 4.12 to guide the planning and implementation of necessary compensatory measures.

Directive	Policy	Triggered	Comments
Forests	OP/BP 4.36	No	Not triggered since the project activities will not impact any forests or associated resources. However, a total of 170,960 trees will need to be cut along the 50-km priority zone alone. Compensatory tree plantation will be carried out to mitigate this impact.
Pest Management	OP 4.09	Yes	Triggered. Although no agro-chemicals will be used in any of the project activities, the project may induce intensification of cultivation in the area because of increased protection against riverbank erosion and flooding. This intensification of cultivation can in turn potentially increase usage of agro-chemicals. To address this eventuality, linkages will be developed with the already on-going IPM initiatives in the region.
Safety of Dams	OP/BP 4.37	No	Not triggered since no dams are involved under the project.
Projects in International Waterways	OP/BP/ GP 7.50	Yes	The Project is located on an international waterway and will require a riparian notification consistent with World Bank.
Projects in Disputed Areas	OP/BP 7.60	No	Not triggered since no disputed areas exist in or around the project area.
Access to Information			World Bank has developed a new approach to the disclosure of information, transparency and sharing of knowledge. The public will have access to a broad range of information about project in preparation and implementation. The EMF, EIA report, and RAP will be disclosed on BWDB website and also sent to WB InfoShop. Consultations have been held while conducting EIA and preparing EMF as well as RAP; additional consultations will be held with the affected community through a public disclosure/consultation meeting in January 2015. The EIA Executive Summary will be translated in Bangla and placed on BWDB website and also in relevant offices in the project area.

Public consultation and disclosure requirements by World Bank

The Bank reaffirms its recognition and endorsement of the fundamental importance of transparency and accountability to the development process. Accordingly, it is Bank's policy to be open about its activities and to welcome and seek out opportunities to explain its work to the widest possible audience. According to 'OP 4.01: Environmental Assessment' of World Bank, the following conditions applies to the RBIP.

Consultations. For all Category A (e.g. RBIP project) and B projects the borrower should consult the project-affected groups and local nongovernmental organizations (NGOs)

about the project's environmental aspects and takes their views into account. The borrower should initiate such consultations as early as possible. For Category A projects, the borrower should consult these groups at least twice: (a) shortly after environmental screening and before the terms of reference for the EA are finalized; and (b) once a draft EA report is prepared. In addition, the borrower should consult with such groups throughout project implementation as necessary to address EA-related issues that affect them.

Disclosure. For a Category A project, the borrower should provide relevant information on project interventions in a timely manner prior to consultation and in a form and language that are understandable and accessible to the groups being consulted. The borrower should provide a summary of the proposed project's objectives, description, and potential impacts for the initial consultation. For consultation after the draft EA report is prepared, the borrower should provide a summary of the EA's conclusions. In addition, for a Category A project, the borrower makes the draft EA report available at a public place accessible to project-affected groups and local NGOs. The borrower also ensures that EA reports for Category A subprojects are made available in a public place accessible to affected groups and local NGOs. The document needs to be translated into Bengali. Public availability of the EA report for Category A project in the borrowing country and official receipt by the Bank are prerequisites to Bank appraisal of these projects.

3. Project Description

This Chapter provides a simplified description of the project on the basis of the information available at this stage. More details are available in the feasibility report.

3.1. Background

The Jamuna is one of the most important rivers of Bangladesh and dominates the hydrology and inundation cycles of the flood plains of Bangladesh. The river originates in the northern Himalayas in Tibet, flows through China as the Yarlung Tsangpo and India as the Brahmaputra and enters Bangladesh as the Jamuna. The Brahmaputra-Jamuna river system displays characteristics of a braided river and is highly susceptible to migration and avulsion. In plan form, the river typically shows two to three main channels per cross-section and has an average width of 12 kilometers in Bangladesh.

In the 1960s, the 220 km Brahmaputra Right-bank Embankment (BRE) was constructed from Kaunia in Rangpur district to Bera in the Pabna district, to protect the surrounding area from flooding of the Jamuna (Brahmaputra) river and to improve agricultural production in the area (**Figure 1.1**). Around 180km of the embankment follow the Brahmaputra/Jamuna right bank, while 40km of embankment was built along the Teesta right bank. The Teesta is the main tributary of the Jamuna river in Bangladesh with its flow controlled by barrages in Bangladesh and India.

Prior to the BRE construction, overbank spills regularly caused flooding to some 240,000 ha of fertile floodplain land. Originally the BRE had a setback distance of about 1.50 km from the Jamuna's river bankline. Over the years the embankment has been increasingly under attack from westward shifting of the river and consequent bank erosion, causing the embankment to breach at several locations. After such breaches, the embankment had to be retired from its original alignment and reconstructed. The retired embankments were typically constructed with around a 200 meter setback distance to prevent flooding. In many places, the embankment has been retired several times.

Under the Flood Action Plan (FAP 1), a Master Plan was prepared in 1994 to protect the BRE against ongoing riverbank erosion (Halcrow, 1994). The study included an assessment of river processes and physical and hydraulic modelling of various river training structures. The study proposed constructing a series of hard point structures along the existing bankline to limit future erosion. The structures were typically about 800 meters long and it was proposed that they be spaced 2.5 km apart along the right bank. It was recognized that erosion might continue between the structures, albeit at a slower rate, and where this occurred, the embankment could still need to be retired.

Recent History

After completion of the Master Plan hard points were constructed at Sirajganj, Sariakandi, and Mathurapara, and a groyne was installed at Kalitola from 1995 to 1998. The structures were heavily damaged, first in 1998 and 1999 and repeatedly later, and have required ongoing maintenance and re-construction. Due to the high cost of the "hard points", the BWDB developed alternatives since the mid-1990s. While protruding spurs did not work satisfactorily, the BWDB has turned to guiding revetments since the mid-2000s, which have demonstrated a lower failure rate and protect the embankment better against steadily reducing overall setback distances to the river.

Bank erosion has continued to attack the BRE, causing it to breach frequently and at different locations. Presently, only 41 kilometers of the original BRE remains intact upstream of Jamuna Bridge, and the overall setback distance is steadily reducing with more and more embankment length being within the reach of annual average erosion rates. Consequently, the integrity of the BRE is threatened and large areas of rural and urban areas are increasingly being exposed to the risk of flooding.

3.2. Proposed Interventions

3.2.1. Program Rationale

Bangladesh, as the lowest riparian country of the Brahmaputra-Ganges river basin, lacks control over the basin and has to adapt to externally imposed basin changes. Natural processes associated with the continuing mountain-building process of the Himalaya and the annual monsoon rainfall on their southern mountain slopes, have built and continue building the delta that constitutes the major part of Bangladesh. This process is driven by some of the highest river flows and sediment loads in the world, mostly transported through Bangladesh into the Bay of Bengal during the four-month monsoon period from June through September. Besides being unable to control the physical environment, Bangladesh also lacks political influence over basin developments, including land-use changes and the construction of dams in India and China. Given the very high and growing population density, climate change poses additional future threats through projected increases in river flows, sediment loads, and sea levels.

Feeding the rapidly growing population of Bangladesh over the last half-century called for systematic reduction of flood risks to agricultural land, but until this now was constrained by large-scale river instability. Nevertheless, a quest for food self-sufficiency has resulted in some control and regulation to achieve multiple and increasingly high-yield crops. The key elements are: (i) flood risk reduction through the construction of embankments to control water levels during the monsoon season; and (ii) upgrading of irrigation infrastructure to enable a major second crop during the dry season. River instability and widening, however, has caused increasing destruction of flood embankments since the later 1970s and has also affected the irrigation schemes. At first, the reasons for this increased instability were not understood, but the Government also did not have sufficient resources or appropriate technologies to arrest large-scale riverbank erosion. A better understanding of river processes, together with low-cost technologies for riverbank protection, was developed only after 1990.

As of 2014, Bangladesh was in a transition from “fire-fighting” local riverbank erosion to developing a more comprehensive program for riverbank protection and river stabilization. The BWDB developed a promising bank protection technology from the early 1990s until 2010, based on experimentation with a number of technologies, often donor-supported. The method recommended in the Board’s Guideline for Riverbank Protection (2010), involves long guiding revetments along similar lines of those in high-energy reaches of the lower Mississippi River, USA. In support of larger-scale river stabilization, the BWDB experimented with capital dredging within the scope of a feasibility study,⁷ and the two main funders of water projects - the World Bank and the

⁷Feasibility Study of Capital Dredging and Sustainable River Management in Bangladesh, draft final report, April 2014. This study estimates that 311 km of long guiding revetments could protect both riverbanks along the 220-km long Brahmaputra/Jamuna course from the Indian border to the confluence with the Ganges. The riverbank protection would be supplemented by an annual dredging volume of 146 million cubic meters - which amounts to roughly one third of the annual sediment load of the Brahmaputra River.

Asian Development Bank - have launched major initiatives⁸. Given that the annual average cost of capital dredging amounts to 30 times the annual BWDB budget, the need is recognized for a phased river stabilization program and for riverbank protection and land reclamation to be viewed as a joint process.

One critical length is the 150-km BRE north of Jamuna Bridge, which protects around 200,000 ha of the grain-growing Northwestern Region against flooding. Riverbank erosion in this area has continuously displaced the floodplain population since 1973, so that by 2014 around 100,000 squatters were living on the embankment, of whom about 40,000 were located in a 50-km priority reach. These people have lost their land and livelihood, some having had to relocate up to seven times. The fear of riverbank erosion and major flooding has a strong negative impact on riparian residents, who generally have high poverty levels, low health, and crowded low-quality dwellings with restricted access to civic amenities and roads. Their overwhelming demand is to stop riverbank erosion and forced retirement of embankments, which cuts ever more deeply into long-established communities.

BWDB has taken some first steps towards flexible management of these processes, but is currently inhibited by a rigid administrative framework focused on implementation of exactly pre-defined works, a process that cannot deal adequately with the vagaries of the river system. Several mitigating approaches have been considered or implemented, including: (i) flexible financing through a framework DPP with block allocation of funds, (ii) modernized guidelines for standardized riverbank protection, (iii) participatory maintenance arrangements on different levels, and (iv) establishment of a new river management wing within BWDB. The bank-supported RBIP can support the BWDB in achieving the required flexibility in dealing with large-scale river stabilization and to follow a “learning-by-doing” approach to identify an optimal river corridor and a range of suitable technical solutions to be implemented in phases. The use of pilot works plays a fundamental role in developing new technical approaches, and also in limiting the personal liability of design and construction staff.

3.2.2. Program Objectives

The overall objectives of the RBIP are to reconstruct the BRE and secure it against erosion. Arresting erosion is the primary interest of the local population living alongside the riverbank. Secondary objectives are to: (i) develop the local area to catch up with the rest of the country and reduce poverty; and (ii) strengthen BWDB’s capacity as a competent agency for mitigation of flooding and bank erosion within an overall strategy for Integrated Flood Risk Management.

While reduction of riverbank erosion and flooding risks will have positive impacts on development of the area in general, the rehabilitation of erosion victims presently squatting on more than 90 percent of the embankment length will directly benefit a large population that is neglected by current disaster response mechanisms.

The specific objectives of the Riverbank Improvement Program (RBIP) are: (i) to reduce riverbank erosion along 150 km of the right (western) bank of the Brahmaputra/Jamuna

⁸ ADB: Flood and Riverbank Erosion Risk Management Investment Program (FRERMIP) covering the central Brahmaputra System from Jamuna Bridge to Chandpur, study from 2012 to 13, loan effective since mid-2014; and the World Bank’s current River Bank Improvement Program (RBIP), covering the northern part of the Brahmaputra system in Bangladesh between Jamuna Bridge and Indian border, study from 2012 until 2015, loan expected at the end of 2015.

River from the Teesta River to the Jamuna Bridge; (ii) provide a reliable flood embankment with roadway; (iii) rehabilitate the population squatting on existing embankments; and (iv) initiate institutional change within BWDB to provide long-reach stabilization work and maintain it jointly with local communities. The performance indicators associated with these objectives and the associated timeframe are given below.

Table 3.1: Performance Indicators and Timeframes

Indicator	Level	Timeframe
Impact	Overarching or higher order goals: Millennium Development Goals, 6 th Five-Year Plan, “a world free of poverty”	Five years after program end
Outcome	Dominant issues of water sector and people’s livelihoods, such as erosion and flood protection, irrigation expansion etc.	At program end
Output	Detailed results from individual program components or activities, such as embankment construction, training, formation of stakeholder groups	During program implementation

3.2.3. Program Boundaries

The BRE protects central parts of Bangladesh’s north-western zone from Brahmaputra/Jamuna River flooding. It is delineated to the north by the Kurigram Irrigation Project, North and South Units, which provide around 36km of embankments along the Brahmaputra/Jamuna towards the Indian border, and in the south by the Pabna Irrigation and Rural Development Project (PIRDP), which provides around 30km of embankment line to the confluence with the Ganges. The BRE starts at the Teesta Bridge at Kaunia and follows the right bank of the Teesta River for 40km to its confluence with the Brahmaputra/Jamuna. The Teesta River forms the southern boundary of the Kurigram Irrigation Project. From the Teesta confluence the BRE follows the Jamuna River for around 180km to the south until it reaches the Hurasagar/Baral River, where it ends. The Hurashagar/Baral forms the northern boundary of the PIRDP. **Figure 3.1** shows the BRE as the central part of the Brahmaputra/Jamuna right bank flood protection. The BRE influences around 297,000 ha of land. Since its establishment at the end of the 1960s, around 21,000 ha of flood-protected land were eroded along the BRE, and only 61km of the originally 178-km embankment along the Brahmaputra/Jamuna were still in place in 2014.

The RBIP covers the central and northern part of the BRE in the Sirajganj, Bogra, and Gaibandha Districts, and can be extended to the Kurigram Irrigation Project’s North and South Units over a new bridge across the Teesta River in future (**Figure 3.2**). The 40-km BRE section along the Teesta River has been omitted due to its low risk of flooding since construction of the Teesta Barrage in 1990. A 50-km priority reach (Phase 1 works) extends from Simla, about 8km upstream of Sirajganj, to Hasnapara approximately 10km upstream of Sariakandi, covering the central part of the BRE. The remaining 97km will be addressed in Phase 2, while the embankment along the whole length will be provided with a highway standard road in Phase 3. The short 20-km long southern reach between Simla and Jamuna Bridge was left out, as the BWDB is currently constructing interventions there to reclaim some of the lost floodplain land. It is planned to align the new embankment over the reclaimed land under Phase 2.

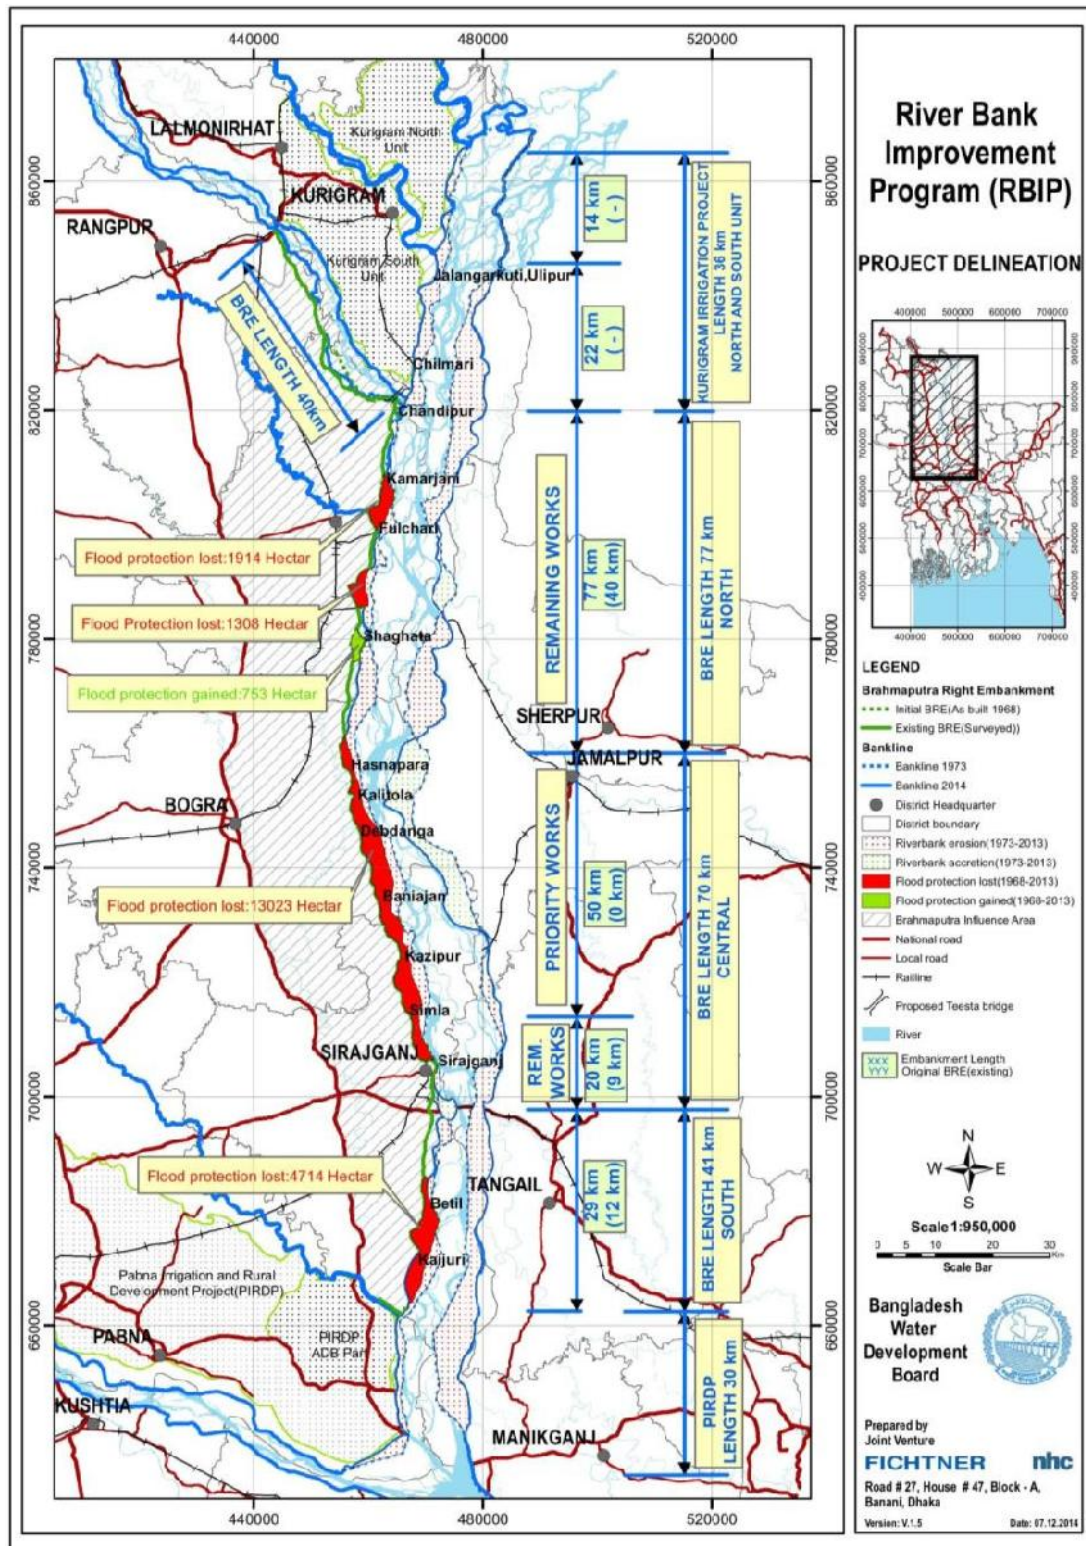


Figure 3.1: BRE and Adjacent Areas

3.3. Program Area, Work Sequencing, and Key Components

3.3.1. RBIP Area and Selection of Priority Reach

The RBIP starts with the rehabilitation of the existing around 150km long Brahmaputra Right Embankment (BRE) from the Teesta River to the Jamuna Bridge while the future ADB support under FRERMIP will cover the 140km length from Jamuna Bridge to Chandpur. The 70km BRE reach from Jamuna Bridge to Hasnapara is under heavy erosional attack with frequent embankment breaching and retirements. Out of this, the 50-km length between Hasnapara and Simla is designated as a priority reach for the following reasons:

- Erosion rate: Over the 42-year period 1973 to 2014 the Brahmaputra/Jamuna eroded an average 3.3km wide strip into the floodplain with peak erosion exceeding 5 km. In comparison the average erosion rate along the whole BRE was 1.9km from 1973 to 2014.
- Embankment breaching: The embankment setback distance has reduced from typically 1.5 km in 1973 to 390m in 2014. About 33 percent of the existing BRE is situated within 200m from the riverbank. With annual erosion rate of 150m in one year and 250m in two years in 10 percent of the cases the embankment is at a high risk of erosion. About 86 percent of the embankment retirements between 1995 and 2013 occurred in this reach, and the annual risk of a breach is 67 percent. The embankment has been retired typically five times and as much as nine times up to 3.5km to the west of the historic embankment line.
- Risk of inundation: The floodplain slopes to the west towards a network of smaller streams draining the terrain behind a natural levee built by the river. A sequence of several breaches of the BRE would inundate substantial parts of the floodplain to levels not experienced since its completion. Numerical modeling indicates that the flooded area due to breaches would average nearly 50,000 ha annually, as opposed to 15,000 ha in the remaining (Phase II) areas upstream.
- Risk of avulsion: The Bangali River flows closely to the Brahmaputra riverbank in the Sarikandi area. Over a length of some 15 km it is located as close as 350 m to the Brahmaputra bankline, a distance that could be eroded in one year. Avulsion of the Brahmaputra into the Bangali during a higher flood could cause widespread destruction.
- Limited bank protection: The riverbank is insufficiently protected against embankment breaching with currently only 12km provided with riverbank protection work. Over the last four decades some 20,000 ha of land has been lost due to erosion and breaches - corresponding in area to a large irrigation project.

Table 3.2 summarizes key project interventions in the priority and remaining reaches. Interventions in the priority reach will be designed in detail, whereas those in the remaining reaches will be tentative as based on the existing river morphology - their final design will depend on the amount of river change between the present feasibility study and the detailed design phase and the desired level of reclamation and river training identified during the first year of Phase I.

Table 3.2: Summary of physical interventions

Intervention	Priority Reach	Remaining Reach
Reconstructed BRE	50 km	87 km
New Riverbank Protection	17 km	25km
Upgraded Revetment	7.2 km	5.4 km
Upgraded Spur	6	-
Upgraded hard point	-	1
Upgraded Groyne	1	-
Upgraded cross bar	-	4
Regulators	2	14
Fish Passes	4	-
Culverts	2	-
Bridges	0	1

3.3.2. The Phased Program

The complex task of attempting to stabilize the largest braided sand-bed river in the world within one of the densest populated countries of the world demands a phased approach. The proposed program consists of three phases of typically 5 years each, with on average 2 years of overlap, as follows:

- **Phase I – Priority Reach:** In this reach, all of the original BRE has been eroded due to widening and westward shift of the Brahmaputra. Phase I involves complete reconstruction of the flood embankment, while securing the riverbank against erosion through long guiding revetments that will incorporate current emergency works being built by BWDB. Approximately 17km of riverbank protection will be provided in addition to 12km existing, the remaining areas being shielded by upstream protection.
- **Phase II – Remaining Reaches:** The remaining reaches include 20 km of the BRE extending upstream from Jamuna Bridge to the priority reach, and 77 km extending upstream from the priority reach to the Teesta River. The two areas are distinctly different as indicated below:
 - In the southern 20 km, upstream and downstream of the exposed Sirajganj Town Protection, BWDB is currently reclaiming some lost floodplain land where the river has outflanked Sirajganj Town and the western guide bund of Jamuna Bridge. Phase II activities will support the existing riverbank protection where required and construct a new embankment parallel to the new bankline, to secure the reclaimed land against flooding.
 - In the northern 77 km the BRE is heavily populated and its crest level is too low for the future design flood. The embankment is subject to riverbank erosion in several places, although not at the scale of the priority reach. The river's main channel runs alongside the left bank, with mostly flood channels and attached chars alongside the right bank. Some reclamation of lost floodplain land can be considered as part of Phase II.
- Phase II also focuses on reconstruction of the BRE and securing it against riverbank erosion. While this preparatory study is based on riverbank protection along the

present bankline, we recognize the need for a concept of comprehensive river stabilization, in line with the recommendation from the IPOE. The extent and type of riverbank erosion protection will be decided on the basis of a river training and reclamation study component encompassing the whole Brahmaputra River from the Indian border to the Jamuna Bridge. This river training study will precede the updated feasibility study component and detailed design of the remaining works and allow considering the option of reclaiming lost floodplain land and realigning the BRE over the reclaimed land.

- Efforts should be made to understand flooding processes on the floodplain. The BRE provides flood protection to around 6 percent (220,000 ha) of the Northwestern Region (3,433,500 ha), a region that produces 34 percent of the country's food grains. Growing road connections interfere with natural flooding and drainage paths and have led to noticeable changes since the time of BRE construction. Future sustainable development depends on a better understanding of residual flood risks, which requires two-dimensional flood modeling. In combination with depth-duration-damage curves, such modeling will enable the production of flood risk maps that identify areas and assets at risk during events of various frequencies, so providing input for land-use zoning and development of a Master Plan.
- **Phase III – Road:** The new embankment will incorporate an emergency and maintenance road. Existing service or feeder roads on embankments often consist merely of crest pavement. For better market access by the local population, a higher category of road construction is warranted that would allow for future widening to four lanes. Also, subsoil conditions indicate that a wide embankment is needed to avoid geotechnical failure from seepage. The alignment of the reconstructed BRE will therefore allow for future road upgrading according to the Asian highway standard adopted in Bangladesh. Three development stages are envisaged as base case as described below, with alternative construction and operation models to be studied at the beginning of Phase I to identify the best way forward:
 - The 50-km length of embankment constructed in Phase I will be provided with a “construction road” on the country-side berm.
 - After completion of the reconstructed embankment, a two-lane highway on the country side will provide local connectivity and also establish an interregional link from the Jamuna Bridge to the new Teesta Bridge near Chilmari, connecting the northern districts of Kurigram and Lalmonirhat. An initial traffic count indicates that this road would be economically feasible as it would shorten the travel distance between Jamuna Bridge and the northwestern districts⁹ from about 187 to 150 km. The new road would also cater to diverted traffic from Chilmari port. An origin and destination survey indicates that about 50 percent of the traffic on the existing route is through traffic that would be diverted. Non-through traffic will continue to use the existing route.
 - The highway would start construction shortly after completing the reconstruction of the priority reach and will be opened one year after completion of the Phase II BRE. Various toll road options will be considered, to cover both road and embankment maintenance - but not the investment cost for the embankment, as indicated by initial estimates.

⁹ Gaibanda, Lamoniirhat, Thakargaon, Dinajpur, Panchagarh, Nilmaphar

- Traffic forecasts indicate that after 20 years the increased traffic could justify a four-lane highway for interregional traffic. This highway could be separated from the existing road network and accessible to it at a few locations, but otherwise bridged for uninterrupted interregional communication. Local communication would be provided through an extended network of feeder or service roads, established at that time through the continuous road program of the local government.

Figure 3.3 shows the schedule of the three phases of the RBIP.

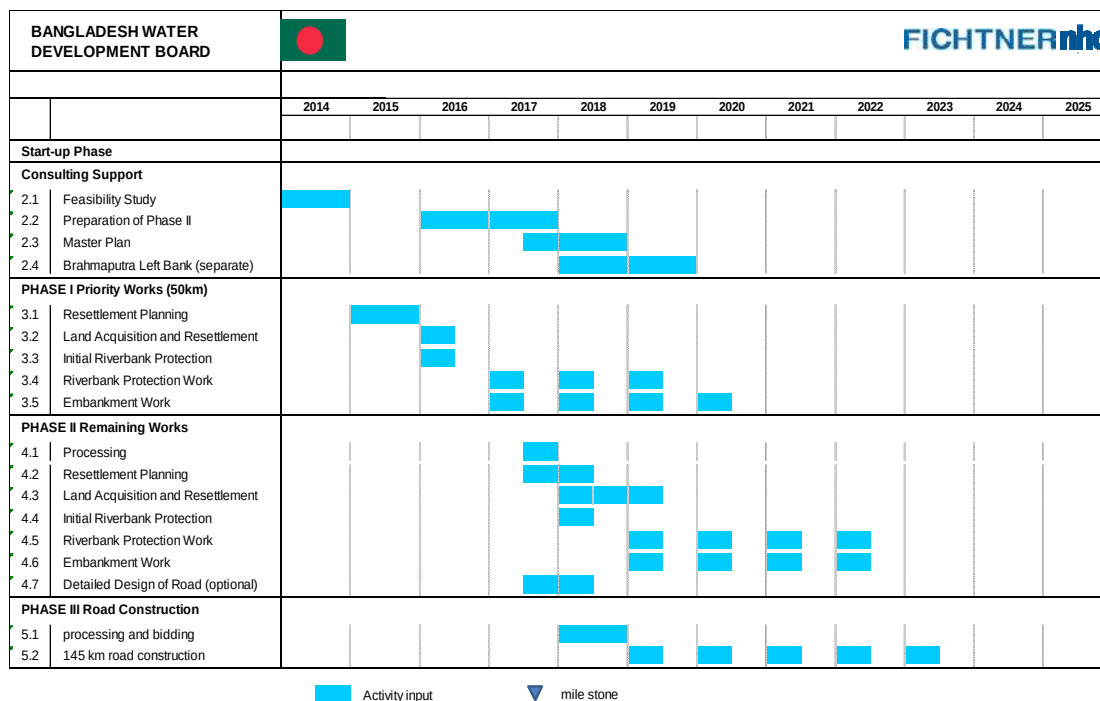


Figure 3.3: Outlines the Overall RBIP Schedule

3.3.3. Flood Embankments

The Alignment Planning

The planned change from repeated retirements to a permanent, drivable embankment along stable riverbanks demands higher design standards for the reconstructed BRE. Modern flood embankments that both keep out flood water and provide emergency road access normally have two parts: (i) a higher, riverside part for flood resistance, including an impermeable cover layer, wave protection, and freeboard, and (ii) a lower country-side part incorporating a road and designed to reduce seepage through the embankment body or the underlying subsoil. In Bangladesh, both original BRE and reconstructed sections have similar profiles, with the country-side berm having been used as a bullock-cart trail until the mid-1980s. As of 2014 this berm was mostly occupied by squatters.

The proposed reconstructed BRE alignment has been selected on the basis of a multi-criteria assessment of alternative solutions, following a seven-step process that covers both technical and non-technical aspects (Figure 4-1 of the Feasibility report). Technical criteria came first: a safe setback distance and a cross-section suitable for all expected

loads, followed by design speed and environmental requirements and optimizing protection to the local population while minimizing land acquisition and resettlement impacts. The high number of squatters on the existing embankment required additional land for resettlement villages and in many cases led to an alignment parallel to the existing embankment and bypassing dense settlements, which gained widespread approval from the local population. Final adjustments were made in the field, bypassing locally important sites. **Figure 3.4** explains a number of alignment issues on one example of the detailed project maps, with the explanations given in **Table 3.3** below.

Table 3.3: Explanations of Map in Figure 3.4

Number	Description
1	New embankment alignment with widening in places for road intersections
2	Existing embankment (green line) situated close to the eroding riverbank.
3	Eroded land between 2013 (date of satellite picture) and early 2014 (orange bankline)
4	Predicted erosion line based on CEGIS 2014 erosion prediction (dashed black line)
5	Minimal alternative (yellow line) following the existing embankment and being widened to the river side.
6	New embankment aligned over an attached char.
7	Protected char with planned riverbank protection in light blue
8	Hard point proposed by FAP 1 in the early 1990s following the then bankline.
9	Destroyed riverbank protection built in the early 2000s (dashed yellow line)
10	Homesteads on the floodplain

The final alignment has been setback from the embankment at a safe distance of minimum 100m to account for local bank failure but aligned as closely as possible to provide maximum protection.

The length and land acquisition requirements are provided in **Table 3.4**.

Table 3.4: Key Parameters of the BRE

	Phase II Jamuna Bridge to Simla	Phase I Simla to Hasnapara	Phase II Hasnapara to Teesta	Total Jamuna Bridge to Teesta
Length				
Existing BRE	20	53	74	147
New BRE	17	50	70	137
Footprint				
New BRE	110ha	340ha	435ha	885ha
Already acquired	10ha	50ha	100ha	160ha

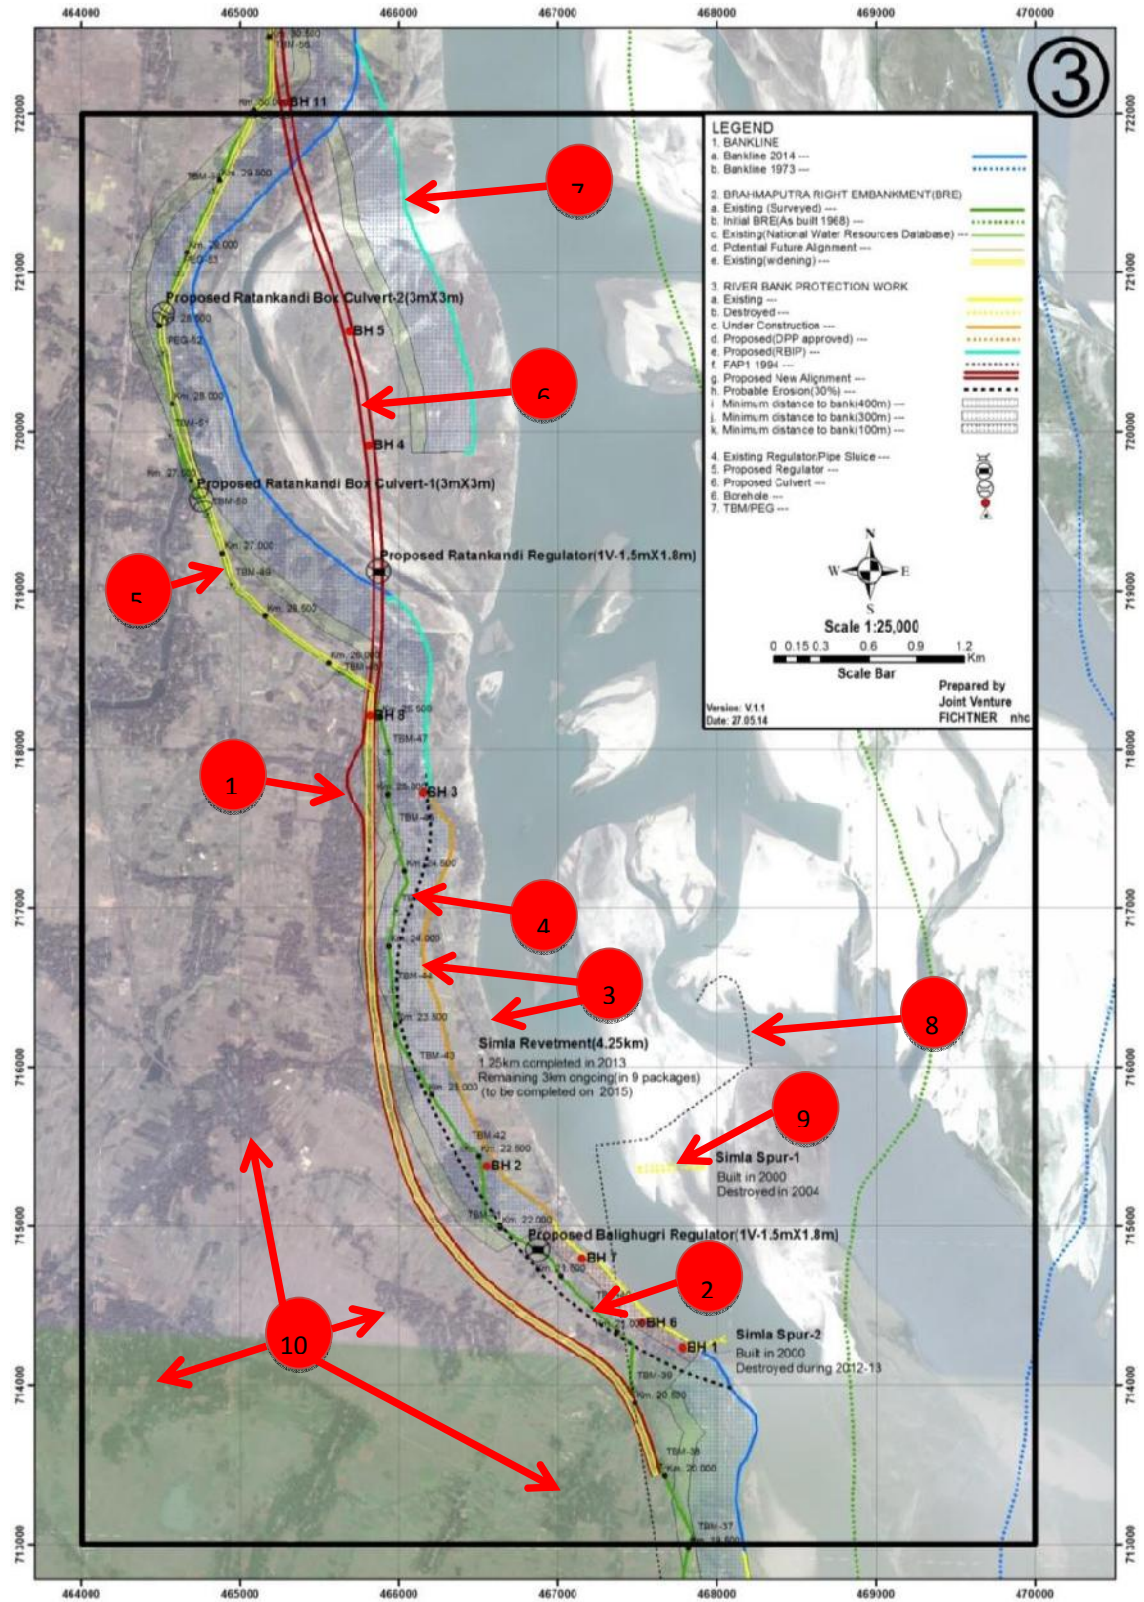


Figure 3.4: Detailed map with explanation (see explanations in Table 3.3)

Embankment Design

The proposed new embankment incorporates the following design features (more details are provided in the Feasibility report):

- The crest level will be raised to the 100-year flood level including climate change addition for 30 years plus 1.5 m freeboard.
- Along around 40 percent of the length of the reconstructed BRE in the priority reach, an impermeable membrane will be placed to separate subsoil and embankment body (as the cohesive topsoil layer is insufficiently thick).
- The new embankment is designed for load combinations including earthquake, rapid drawdown, and seepage. Seepage control requires a wide embankment body and two separate drainage systems to drain seepage and rainwater. The drainage system and outlet structure are designed to prevent entry of rodents and facilitate regular flushing.
- The core of the embankment will consist of dredged sand, to avoid additional borrow pits on the densely populated floodplain. Surficial cladding will use selected cohesive soil from the toe excavation and the existing embankment line, which will be cut along about 40 percent of the length of the new alignment.
- Both toe lines will be protected from encroachment by placing open cell pavers along the river side and planting trees on the country side, so that farmers cannot plough into the protective clay layer.
- The crest of the embankment will be covered with open cell pavers to allow vegetation growth, fix the crest level, and discourage through traffic.
- A countryside berm will initially accommodate a two-lane construction road for emergency and local access, connected in eight places to the local road network. In other places crossings will allow the local population to access the river. The unoccupied part of the berm will have suitable vegetation coverage to discourage unauthorized settlement.

The standard design water level for the main rivers in Bangladesh has a 100-year return period. Climate change predictions indicate a slight increase in water levels such that 30 years into the future, the 100-year level will correspond to the present 200-year level. Morphological modeling, used to evaluate the water levels associated with a future 100-year discharge, indicate that water levels higher than indicated by statistical analysis should be used - specifically to account for a future protected riverbank. A comparison of water levels for key locations is provided in **Table 3.5**. Finally, a freeboard of 1.5 m will be added to the new design water level to account uncertainty in flood statistics, wave runoff, morphological changes, local settlements or subsidence etc. In terms of statistics, the 500-year flood level is estimated to be 0.5 m above the design flood level (DFL), which would still be below the crest of the embankment. The safety of the embankment against failure from overtopping, either from waves or extreme peak flows, is further increased by the wide paved road on the country side, which protects against retrogressive failure and sudden breach.

Table 3.5: Comparison of Design Water Levels and Embankment Crest Levels

Location	Existing 100-year DFL [m+PWD]	Existing crest level [m+PWD]	RBIP 100-yearDFL [m+PWD]	RBIP crest level [m+PWD]
Jamuna Bridge, West Guide Bund Northing: 699500	15.00	16.50	15.27	16.77
Sirajganj Town Protection Northing: southern end 704500 Northing: northern end 707000	15.75	16.75	15.79	17.29
Sariakandi (Kalitola) Northing: 752800	19.77	20.85	20.25	21.75
Kamarjani Northing:804000	22.90	23.50	n.a.	n.a.

The constructed embankment will also have the following features:

- The height in the priority will range from 2.6 to 9 m.
- The footprint will range from 40 to 90 m, mostly from 60 to 70m;
- The setback distance from the river will range from 100 to 700m, with 50 percent of the length below 400 m. The minimum distance of 100 m has been selected for geotechnical reasons: in case the riverbank fails locally, the failure boundary needs to be far enough from the embankment to avoid compromising the flood protection and road.
- The cross-section will be uniform. Old embankments will be cut off and any suitable material will be used as cladding.
- The country-side slope allows for future super-elevation of a four-lane highway.

The alignment of the new road has been fixed for the priority reach, with construction expected to start at the end of 2015. The alignment along the remaining lengths, while fixed tentatively for budgeting purposes, is subject to uncertainties over the future course of action – whether to follow the existing bank or to reclaim lost floodplain land.

3.3.4. The Construction Road

The reconstructed BRE will be provided with a road for four main purposes: (i) reliable road access facilitates emergency response; (ii) regional connectivity of the local population provides additional development impetus and helps fighting poverty, (iii) the northern districts of Kurigram including border posts to Assam, India profit from enhanced interregional connectivity to and from Dhaka, and (iv) potentially an alternate route for connectivity of the South Asian Sub-regional Economic Cooperation (SASEC).

Based on future traffic forecasts and the geotechnical need for a wider embankment, the proposed embankment cross-section along the 50km priority reach allows for a future four-lane highway, reducing the need for future land acquisition. The typical cross section is between 60 and 70m wide including a 2.5m wide strip between land acquisition boundary and embankment toe line as buffer. The countryside toe has been established based on a four-lane highway layout with super-elevation, in order to avoid later

additional land acquisition. About 90 percent of the land for the reconstructed embankment in the priority reach needs to be acquired, as the existing embankment is mostly within an unsafe distance to the riverbank.

The priority reach will be provided with a construction road to facilitate the movement of construction vehicles, BWDB inspection teams, slow moving traffic, and maintain largely non-motorized connectivity to the local population. The sand for the embankment construction requires stockpiling at dedicated areas, such as the char area to be partially reclaimed in the south of the alignment (refer to Point 6 on **Figure 3.4**). During construction the sand is transported, spread and compacted along the long linear alignment. The construction road facilitates this transport, accelerates construction progress, and reduces the need for a large number of intermediate stockpiles. The construction road will consist of a two-lane, 6.2m wide road of 200mm crushed bricks (“water-bound macadam”) on 300mm sub-base with uniform side slope towards the countryside for improved drainage. The alignment follows the centerline of a future 7.3m wide two-lane highway with 2m wide shoulders. The unused part between construction road and toe drain alongside the embankment crest will be planted with shrubs and trees to discourage settlement. **Figure 3.5** shows the cross section of the construction road and the potential two-lane highway.

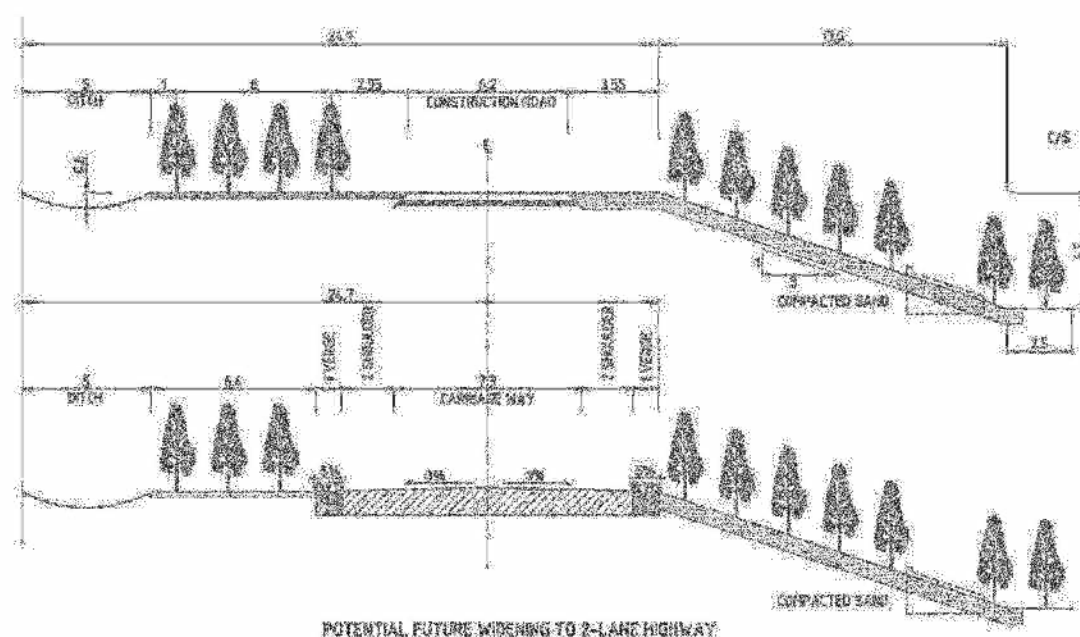


Figure 3.5: Two lane construction road following alignment of future two-lane highway standard road

Twenty crossings of different types will connect the construction road with the local road network and permit the local population to cross the embankment. Eight large crossings connect the embankment to the network of paved roads. Four T-junctions connect roads from the countryside and four elevated intersections pass over the embankment. Twelve small crossings with limited works, also termed “community infrastructure”, connect local roads, parts of the existing embankment, but also individual settlements to the new embankment wherever required to maintain and improve the connectivity. These crossings do not allow large motorized vehicle access.

3.3.5. Regulators and Fish Passes

The reconstructed embankment will enhance the environment through a number of regulators and fish passes. The existing embankment, especially in the priority reach hermetically seals the floodplain from the flood flows carrying fertile sediment and fish. Water passage is important for a number of reasons:

- Recharging the groundwater: the passage of floodwater through dedicated khals contributes largely to groundwater recharge. As opposed to the impermeable floodplain, small rivulets, locally called khals contribute largely to the ground water recharge, as they penetrate through the surficial clay layer into the porous underlying sand strata. Closing passage ways through embankments leads to the degradation of the khals and reduced infiltration. This does not only negatively impact on wetlands but also the groundwater table used for local irrigation.
- Supplementary irrigation: Regulators or fish passes allow substitution of low rainfall through flood flows and therefore provide supplementary irrigation. Regulators are commonly opened during normal flood seasons to provide additional water to the rice cultivation but also to entrain some of the fertile silt and clay. Regulators are effective for water levels above flood level in order to inundate the rice fields.
- Fish migration: It is widely recognized that further enhanced agriculture and fish productivity depends on a mix of rice and fish culture. Fish also provides an important part of the protein intake of poor people. Increased fish production requires the passage of fish eggs, fingerlings, and fry from river to the floodplain during the period April to June and the return of adult fish after the monsoon in October. It is important to recognize that eggs and fingerlings drift with the flowing water and cannot swim, while fish fry can move on its own. Fish passes are designed to be effective for water levels typically 2m below flood plain level to allow fish migration through khals starting from May.

3.3.6. Riverbank Protection

Of a range of options for protecting the riverbank, guiding revetments incorporating sand-filled geo-textile bags (geo-bags) are the preferred solution for the high-energy main channel that is presently eroding the right bank in the priority reach and the downstream area to the Jamuna Bridge. The selection process, including designs for alternative solutions and cost estimates, is summarized in Annex A of the Feasibility report, River Engineering Feasibility Designs. The selection of revetments is based on three key considerations:

- Protection of Infrastructure alongside the riverbank: A main purpose of riverbank protection is to assure the integrity of the BRE and other infrastructure alongside the riverbank. Consistent protection is best provided by continuous revetments. To provide equivalent protection, intermittent works such as “hard points” or spurs require greater embankment setback distances with additional riverbank erosion and more displacement of the local population.
- Avoidance of erosion caused by the protection works themselves: Numerical modeling indicates that a frequent cause of failure is outflanking by the river at the curved upstream end of protection works. Short works such as hard points or spurs tend to cause rapid, deep scouring during initial river attack, which worsens over time due to increasing protrusion into the flow as outflanking proceeds. Long guiding

revetments produce less severe flow disturbances and typically only about half the total scoured depth resulting from short protrusions.

- **Stability of Cover Layers:** It is difficult to protect the upstream curvature of hard points or the head of spurs from failure under the high shear stresses of accelerating flow in these locations. Computational fluid dynamics with turbulence modelling of cover layers, in combination with recent turbulence theory, demonstrates that the common apron system of relying on single-layer rock or concrete block aprons must fail, and that in the absence of filters, many layers of rock are required to prevent wash-out of the underlying fine soil. Flexible geo-bags incorporate filter properties perform better as they leave much less gaps through which the subsoil can be eroded.

Guiding revetments have proven sustainable since their first use in 1998 at Sirajganj, especially after the upstream termination was strengthened with a wide apron of geo-textile bags. Subsequently the BWDB placed nearly 30 km of geo-textile bag revetments systematically on underwater slopes between 2004 and 2011. Another 40 km or so were placed using a simpler construction method. In the design of the river training works for Padma Bridge from 2009 to 2011, geo-bag revetment design was developed further: in the immediate vicinity of the bridge the geo-bags were to be covered with a multiple rock layer to increase longevity and robustness, while in upstream areas thicker geo-bag revetments without rock cover were proposed. In the present RBIP case, however, the largely agricultural areas to be protected do not warrant the high cost of rock cover, which would require rock to be imported and paid for in foreign currency. Therefore, as in the upstream areas of Sirajganj Town Protection and Padma Bridge, multiple layers of heavy, filter-tight geo-bags are proposed.

Along the 145 km length of the BRE approximately 55 km of riverbank protection will be required, of which approximately 25 km will be in the priority reach. This includes rehabilitation of approximately 15 km of existing protection, of which 10 km is in the priority reach. **Figure 3.6** shows the proposed locations of riverbank protection. Given the uncertainties associated with future river plan forms, the priority works have a higher level of confidence, as construction is expected to start during the dry season 2015/16. The remaining works, estimated to start three or four years after commencement of Phase I, will be subject to changes associated with (i) river channel shifts, and (ii) consideration of an approach more oriented to river training.

Besides having the best performance record, long guiding geo-bag revetments also reduce impacts on channel and char patterns, since they do not protrude into the flow or deflect the channel into char areas, but rather have a stabilizing influence on the near-bank channel. Unprotected riverbanks tend to show an alternating pattern of erosion and deposition, leading to a meandering planform where the near-bank channel is sometimes deflected into the central part of the river. Long guiding revetments prevent this and result in a channel flowing parallel to the riverbank, with indirect stabilization of the adjacent river islands. Also, the low water channel alongside long revetments tends to be slightly deeper than the natural channel, which assists inland navigation¹⁰.

¹⁰ After constructing the 10 km long revetment upstream of the Hurasagar, the dredging volume in the downstream channel to the Baghabari port dropped to around 30,000 m³ annually from 100,000 earlier.

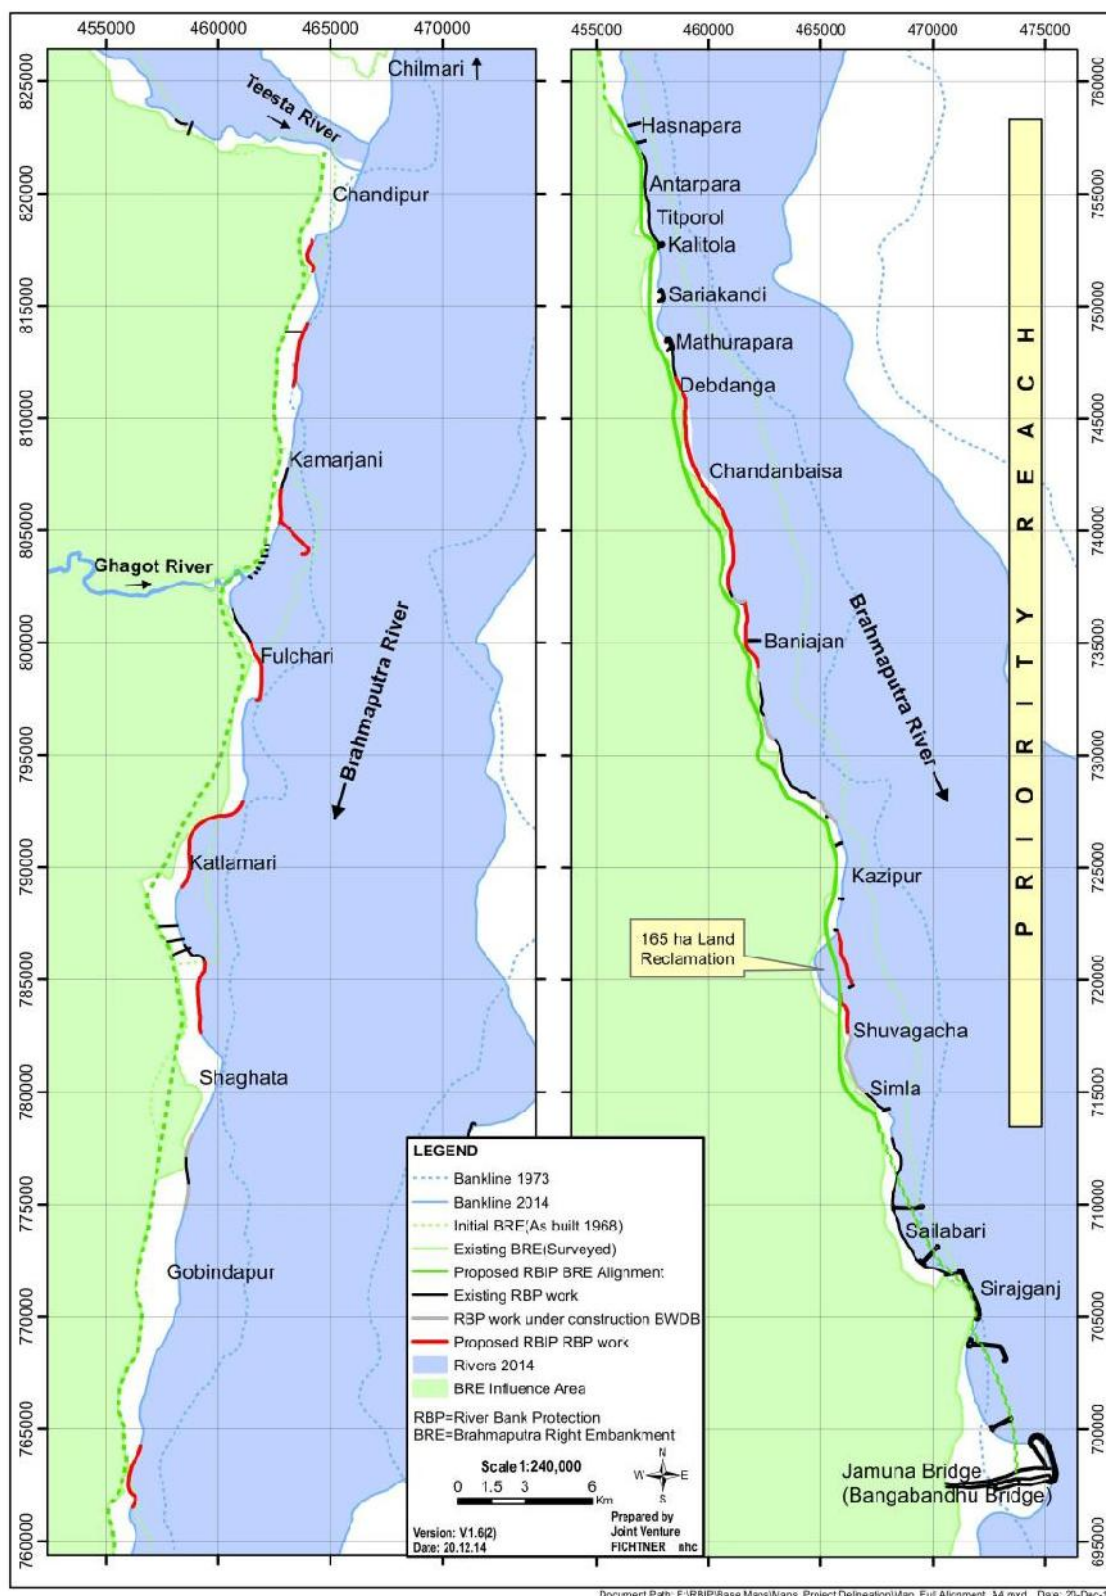


Figure 3.6: Estimated riverbank protection from the Teesta River downstream to Jamuna Bridge

Construction of riverbank protection involves the following three components, from floodplain level to deepest bed level (**Figure 3.7**):

- Wave protection built above low water level, consisting of concrete blocks placed on a geo-textile filter layer.
- Underwater slope protection consisting of three layers of sand-filled geo-bags large enough to be stable under design flow velocities, and providing a tight cover layer including filter properties.
- Toe aprons consisting of multiple layers of geo-bags for self-launching in case of scour.

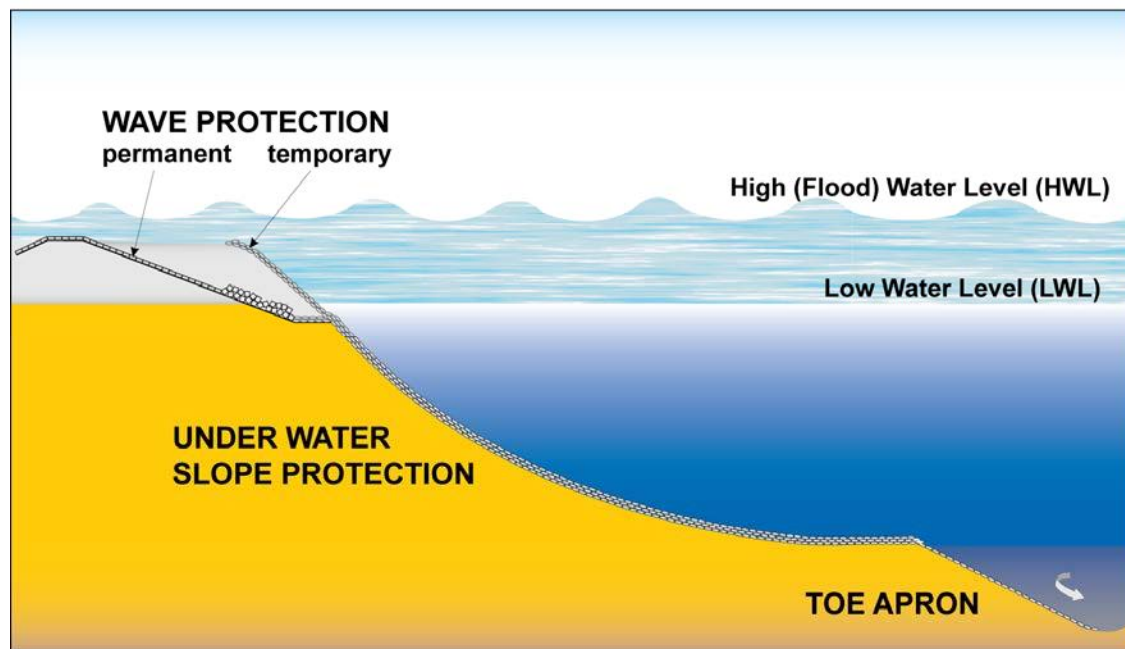


Figure 3.7: The three elements of riverbank protection

The following sections provide details about the work above and below water.

Above water protection

Above-water wave protection covers the zone from 2m below low water and floodplain level and allows access to the water. Concrete blocks with a 40 x 40 cm base over a geo-textile filter are generally used in this zone (**Figure 3.8**). The block thickness is selected to resist maximum flood velocities and lifting forces from wave action and is generally around 20 to 30 cm. Near the floodplain level, alternating rows of thicker and thinner blocks are used to reduce wave run-up. Below low water level, 30 cm concrete cubes are dumped in multiple layers over a geo-textile filter ending on a bench that marks the transition to the underwater slope protection.

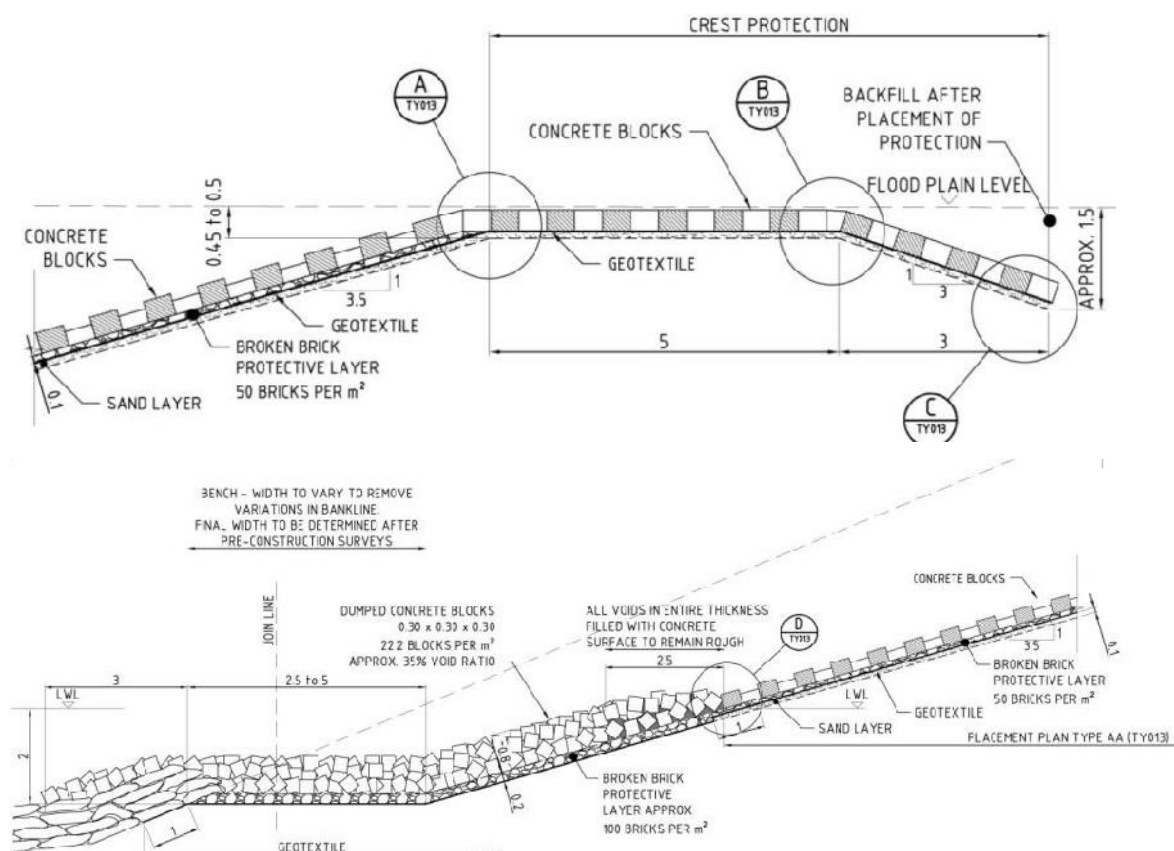


Figure 3.8: Typical cross section of the upper slope treatment

The amount of concrete in the wave protection layer can be reduced if interconnected elements are used. Grout-filled mattresses are a viable alternative, as the grout consists of cement and sand that is available on site. Such mattresses have been built at the Meghna Bridge and downstream of the Hurashagar River. They have the added advantage of reducing construction time, as the grout hardens within hours - in one season many kilometers of revetment can be built, even under water, whereas several seasons are required for concrete blocks. **Table 3.6** compares the two alternatives. The design for the priority works incorporates 3 km of grout-filled mattresses, to verify their applicability to RBIP and to prepare for future larger-scale implementation as proposed for the remaining works.

Table 3.6: Comparison of cover layer alternatives above low water level

	Concrete blocks	Grout filled mattress
Construction	➤ Large casting yards on the floodplain, ➤ added traffic for supplying the materials from far distance, ➤ preparation one year ahead of placement, ➤ sensitive to water level rises ➤ depending on manual labor for	➤ Very fast in one season and one construction sequence starting under water and moving up the slope, ➤ Reduced transport of materials as mostly dependent on river sand ➤ Batching plant and transport

	Concrete blocks	Grout filled mattress
	transport and placement	mixers reduce local labor force
Performance	➤ Robust, proven all over Bangladesh, ➤ Low value and low risk of theft ➤ Risk of damages from anchors	➤ Experience at two locations since the end of the 1990s and 2006 without major issues, ➤ low value and low risk of theft ➤ some types are sensitive to localized damages from anchors

Underwater Slope Protection

Two problems with riverbank protection in Bangladesh are difficult to overcome:

- The highly dynamic river morphology can result in large river changes between the low-flow dry season when construction is feasible and the flood season when it is inhibited by high discharges, velocities, and sediment transport rates.
- Bangladesh has no rock quarries, except for one granite mine that can provide only limited quantities of smaller crushed rock largely unsuitable for riverbank protection.

Given the lack of rock and the good experience with initial geo-bag placements, the selected underwater slope protection design for RBIP consists of four layers of systematically dumped sand-filled geo-bags. Geo-bags of 250 kg weight will be used for standard revetment sections, with greater weights for strengthening of existing protruding structures such as spurs. The bags are placed by systematic dumping from barges precisely positioned in the river, to cover the underwater slope from the inner edge of the apron to the riverbank.

Underwater Toe Protection with Aprons

Riverbank protection in these highly mobile rivers depends on self-launching toe aprons that can respond flexibly to river-bed deepening by scour. The method was developed in the subcontinent in the late 19th century and was first applied to protect the piers of railway bridges against local scour. Due to lack of underwater observations, aprons were wrongly believed to produce multiple-layer coverage after launching, but when they were investigated in physical models after failure of a guide bund at Harding Bridge in the 1930s, it was found that only single-layer coverage resulted. This was confirmed after 2000 by diving observations and physical model tests in The Netherlands, Canada, and Bangladesh associated with the Jamuna Bridge, JMREMP, and Padma Bridge projects.

Recent experience demonstrates that flexible geo-bags incorporating filter properties perform better than hard materials for underwater bank protection in Bangladesh river conditions. Four main milestones in their development were as follows:

- After the 1988 flood, the World Bank-supported Flood Damage Restoration Project placed sand-filled geo-bags of around 900 kg weight as filter material under large concrete blocks for Chandpur Town Projection Works. This installation has performed well to date.
- In 1996, the Flood Action Plan, Component 21, built a revetment test section incorporating sand-filled geo-bags as apron material. This protection still performs well.

- After an upstream failure in 1998, the World Bank-financed Sirajganj Town Protection was repaired with a wide apron consisting of three sizes of sand-filled geo-bags, termed cushions (20 kg), pillows (250 kg), and mattresses (900 kg). Although Sirajganj Town Protection continues to fail along downstream areas protected solely by concrete block or rock aprons, the areas with geo-bag aprons have remained stable. This is one of the most turbulent areas in the Bangladesh rivers, due to prominent protrusion of the upstream corner of the Town Protection.
- In the JMREMP project, falling aprons consisting of multiple layers of geo-bags were placed along 17 km of riverbanks in the lower Jamuna. The observed underwater slopes have inclinations of 1V:2H and are geo-technically stable.

Over the last decade, it has been found that three levels of safety can be achieved with increasingly larger footprints:

- Emergency protection dumped from the riverbank: This is widely applied to provide protection for one flood season. After the first flood it is usually upgraded to the next level.
- Above- and underwater slope protection: The methodology was developed under JMREMP in 2004 and later expanded under the Secondary Town Protection Project. Systematic coverage of the slope, secured by an apron, keeps deep toe scour far enough from the bankline and does not destabilize the slope. More recent studies for Padma Bridge showed that to cope with rare earthquake loading and associated flow slides, the apron needs to be widened to ensure that flat slopes following flow slides do not penetrate into the upper slope.
- Dredged slopes to levels near design scour levels: The highest level of safety can be achieved through flat dredged slopes that are stable when subjected to design earthquakes. However, this expensive work has limited stability because the fine non-cohesive soils of Bangladesh liquefy easily at earthquake intensities corresponding to a 50- to 100-year return period. Nevertheless, these flat man-made slopes provide a higher level of safety than the usual natural slopes of the riverbanks. There seem to be no practical ways to improve the stability of riverbanks subject to increased earthquake loads.

Riverbank protection designs for the RBIP are made with a wide apron to account for larger earthquake and potential flow slides during the lifetime.

3.4. Resources Requirements

3.4.1. Material Requirements and their Sources

The construction materials required for embankment, road, river bank revetment, and other project components will include earth, geo-bags, hard rock, sand, geo-textile, stone-chips, brick chips, asphalt, cement, steel for concrete reinforcement, road furniture, and other accessories. Some of these materials will be obtained from within the project area: sand from the river bank and earth from the existing embankment. Other materials such as cement, steel, and brick chips will be procured from local/national markets, whereas some of the materials such as hard rock and asphalt may have to be imported. See **Table 3.7** for the key construction materials and their approximate quantities needed for the first phase of RBIP (priority reach). The quantities of construction materials required for the subsequent phases will be determined during the detailed design of those works.

Table 3.7: Construction Materials

	Description	Approximate Quantity	Source
Embankment			
1	Sand	12 million m ³	River
2	Clay	24,000 m ³	Existing land of proposed alignment, old embankment
3	Brick chips	80,000 m ³	Local supply
4	Concrete blocks	17,000 m ³	Constructed at site
5	Stone Chips	180,000 m ³	Local Supply
6	Geo-textile (3mm thick)	55,600 m ²	Imported/Local Supply
New River bank Protection			
1	CC blocks (Slope protection)	58,000 m ³	Constructed at site
2	CC blocks (underwater)	1,064,700 m ³	Constructed at site
3	Geo-bags (250kg and 800 kg)	3,285,336	Imported/Local Supply
4	Geo-textile	156,000 m ²	Imported/Local Supply
5	Sand	5 million m ³	River
Up grading existing protective work			
1	CC block	960,000 m ³	Constructed at site
2	Geo-textile (3mm thick)	402,000 m ³	Imported/Local Supply
3	Sand	6 million m ³	Local Supply
Structures			
1	Cement	900 ton	Local supply
2	Sand	1,440 m ³	River
3	Stone chips	7500 m ³	Local supply
	Steel	500 ton	Local supply

3.4.2. Manpower Requirements

During the construction phase, technical and non-technical man power will be required in sizeable numbers. These will include engineers, technicians, supervisors, surveyors, mechanics, foremen, machinery operators, drivers and skilled and unskilled labor (see **Table 3.8**). Local community will be able to avail some employment opportunities during this phase.

Table 3.8: Required Manpower during Construction

Category	Persons (Approximate)
Engineer	15
Machinery Operators	40
Mechanics	4
Surveyors	8

Category	Persons (Approximate)
Skilled Laborers	50
Un-skilled Laborers	150

During the O&M phase, the regular staff of the BWDB will carry out the monitoring, repair, and maintenance works.

3.4.3. Construction Machinery

A sizeable number of construction machinery and equipment would be needed for the construction activities of RBIP. A tentative list of these machinery and equipment is presented below (**Table 3.9**).

Table 3.9: List of Construction Equipment and Machinery

1	Bulldozer
2	Dump-truck
3	Pay loader
4	Excavator
5	Barge
6	Engine Boat
7	Vibrator
8	Compactor
9	Mixture Machine
10	Mixing Plant
11	Truck
12	Tractor
13	Generator
14	Total station
15	De-watering system
16	Water-pump

3.4.4. Construction Camps

Construction camps for each construction site are to be established by the contractor. The contractor will select the location of the camp through consultation with the local union parishad chairman and the local community. Moreover, they will have to obtain permission from the authorized BWDB representative. Tube wells may be installed in the labor camps premises for obtaining water for drinking and other purposes. For sanitation, latrines will be constructed along with septic tanks for safe disposal of sewage.

Location of these camps is not known at this stage however the key criteria to be used while selecting the sites re listed below.

- Community consultations will be carried out to select the camp sites
- Cultivation fields will be avoided as far as possible

- Government-owned lands will be given priority while selecting the camp sites
- If private land is used for camp sites, a fair rent will be paid to the land owner.
- Camps will not be established near sensitive receptors such as schools
- Camps will not be established near any sensitive habitat
- Camps will not be established that could affect any *khal*, *beel* or river.
- Camp sites will be approved by construction supervision consultants.

3.5. Operational and Maintenance Requirements

The BWDB receives fund from the government under the annual development program (ADP) for operation and maintenance of its infrastructure under different projects. Records indicate that the BWDB has been receiving on average about 17 percent of the total requirement for O&M, which reveals that the BWDB could not respond to all maintenance needs. For attaining sustainable maintenance of multipurpose project like proposed RBIP, the allocation for O&M in the ADP to be adequate as per actual need or there need to find a way to involve the beneficiaries directly in contributing to O&M. In RBIP, provision for toll collection from the highway can recover a good part of the maintenance cost of the project. It may be noted here that funds available for maintenance are often less than optimal, so it is important to make the best use of available funds and estimates of O&M components should be well supported by appropriate justification.

O&M works of proposed RBIP can be divided into three categories described below.

(a) Routine Maintenance: Routine maintenance includes preventative activities such as repair of small holes and rain cuts in embankments, removal of weeds and sediments from approach canal of regulators, repair of displaced blocks if any in the slope of the bank revetment work, petty repair of the pavement and a forestation of highway. The objective of routine maintenance is to keep overall flood protection system including all its elements in good functional order thereby reducing the need of periodic maintenance eventually avoiding high rehabilitation costs. The works are simple, generally inexpensive and cost effective and may need to be carried out round the year, almost continuously or as and when required.

(b) Periodic Maintenance: This is less frequent than routine maintenance and is likely to include re-sectioning of embankment, re-excavation of approach canal of regulators, rehabilitation of gates and gate lifting devices of regulators, repair of sliding of bank protection work, and maintenance of highway pavement after rainy season. BWDB engineering personnel will identify periodic maintenance works during surveys and inspections or on information from its field staffs.

(c) Emergency Maintenance: This type of maintenance is similar to periodic maintenance, but involves a potentially catastrophic situation that would likely cause significant damage to the infrastructure if not repaired immediately. Emergency maintenance may include breach closure in embankment, repair of major sliding of bank revetment work which if not taken care on emergency basis may cause further damage of the adjacent bank revetment work, arresting of unintentional erosion upstream and downstream of the existing bank revetment work, and repair of loose apron of the regulators. A component of the BWDB O&M budget should be set aside for natural or human caused calamities. Necessary funding and authorization to execute emergency maintenance should be readily available whenever required.

3.5.1. O&M Requirement of Bank protection structures

Bank revetment work is a major component of the project. The life and security of the project largely depend on the performance of the erosion protection works. It has been observed that inadequate monitoring of the completed work and lack of proper O&M activities due to limited funding provisions cause greater damage to the bank protection. Hence regular monitoring and proper O&M activities of bank protection work must be ensured to keep the project functional. O&M of new river bank protection as well as upgrading existing protection will be required to keep the work sustainable. Based on the Flood Plan Coordination Organization (FPCO) guidelines of May 1992, annual O&M cost for the proposed river bank protection should be around ten percent of the capital cost.

3.5.2. O&M Requirements of Embankment cum Road

Maintenance of embankment cum road is another most important item of activities of the project. It is necessary and cannot be avoided because it helps preserving the infrastructure in good and functional condition, protects investments and prevents high rehabilitation costs. BWDB O&M staffs will regularly visit the embankment cum road and detect the weak sections, gullies, slips, sign of squatter settlements, cultivation of perennial cash crops, cuts in the embankments to accommodate homesteads, embankment subsidence and erosion and requirement of repair maintenance work in the road pavement etc. Based on the above observations O&M estimate will be prepared for execution. As per FPCO guidelines the annual O&M cost of this component is five to six percent of the capital cost.

3.5.3. O&M Requirements of Regulators

The proposed regulators would be subjected to variable flows, the most severe of which are likely to occur during high Jamuna stages. Therefore, it is essential that regular inspections take place, so that any damage or any irregularities will be noticed within reasonable time. Measures for rectification can then be taken, so that the damage will be contained. FPCO guidelines suggest to keep three percent of the capital cost as annual O&M cost for this component.

3.6. Project Costs (to be updated)

Initial estimates show the total cost of RBIP is US\$ 914.1 million as a whole, of which physical works account for US\$ 581.3 million – as shown on **Tables 3.10** and **3.11**.

Table 3.10: Initial cost estimates of RBIP (in USD)(to be updated)

Work Item	Priority	Remaining	Priority + Remaining
New river bank protection	73.5	171.5	245.0
Upgrade existing protection	35.2	38.5	73.7
Embankment-road	72.5	142.5	214.7
Regulator	6.1	11.8	17.9
Bridge	0	30.0	30.0
Subtotal, Physical works	187.3	394.0	581.3
Land acquisition river bank	19.7	45.9	65.6

protection			
Land acquisition embankment-road	54.7	96.2	150.9
Other costs (20% contingency)	37.5	78.8	116.26
Total	299.2	614.9	914.1

Table 3.11: Priority physical works, initial cost estimates (in USD)(to be updated)

Work Item	Quantity	Cost (USD)
New river bank protection	15 km	73.5
Upgrade existing protection	16 km	35.2
Embankment-road	50 km	72.5
Regulator	15	6.1
Subtotal, Physical works		187.3
Land acquisition river bank protection	90	19.7
Land acquisition embankment-road	25	54.7
Other costs (20% contingency)		37.5
Total		299.2

4. Analysis of Alternatives

4.1. Overview

Various alternatives are considered in siting and design of the project components. All these alternatives are evaluated considering social and environmental aspects as well as technical and financial aspects. The criteria considered for comparative evaluation of various alternatives is given in Table 4.1.

Table 4.1: Criteria for evaluation of alternatives

Main Criteria	Sub Criteria
Technical Aspects	• Robustness, • constructability, • geology, • degree of protection, • scour, • maintenance requirements, • history of performance, etc.
Financial Aspects	• Construction cost and • maintenance cost
Environmental Aspects	• Project footprints, • material requirements, • impact on river flows and channels, • impact on flood plains and erosion, • impact on chars, • impact on left bank, • impact on aquatic and terrestrial habitats, • impact on fish and fish migration • safety, etc.
Social Aspects	• Land acquisition, • Resettlement • Impacts on navigation • Impacts on char people • Socioeconomic impacts

In addition to the ‘no project’ alternative, the following alternatives are evaluated for RBIP using the criteria presented in **Table 4.1**:

- River Bank Protection Alternatives
- Embankment and Road Alternatives
- Regulator Alternatives
- Resettlement Sites Alternatives

4.2. No Project Alternative

4.2.1. Retirement of BRE and Failure of Bank Protection Structures

Prior to the construction of BRE, over bank spills along the 220 km stretch of the right bank of the Brahmaputra/Jamuna river used to cause flooding on an area of about 240,000 ha. In early 1960s, the BRE was built to protect from this flooding problem and to foster agricultural growth in the project area. The original BRE had a setback of about 1.50 km from the Brahmaputra's right bank. In the 1970s, the embankment started to fall under sporadic erosion attacks. During 1980s, the frequency of BRE breaches by erosion increased rapidly as longer sections came within the range of rapidly eroding river bends which would cause bank line erosion rates of several hundred meters per year in the early stage of bend formation. To prevent flooding, these breaches were typically closed by local retirements at about 200 m set-backs. As a result of this minimal set-back distance the BRE has been retired several times in many places.

Subsequently based on the studies carried out under Flood Action Plan (FAP), different types of structures like revetment, hard points, groynes and spurs etc. were constructed at different locations on Brahmaputra right bank for stabilizing the river bank in the critically eroding reaches. But it was observed that those structures experienced considerable damage due to repeated undermining by scour. The main problems were associated with the deep scour due to outflanking and geotechnical stability problems associated with the launched slopes. Ultimately the concept of hard point, groyne, and spur had to be abandoned by BWDB gradually due to a number of failures, not only in Jamuna river but also in Ganges and Teesta river. Latter on BWDB developed and implemented low cost revetments for longer reach (Kalitola to Mathurapara) and this has been observed the preferred approach until today. But this approach could not be implemented in all the erosion prone locations of BRE due to non availability of GOB fund or any approved donor project. At present perhaps only 41 km of the original BRE has remained in place upstream of Jamuna bridge. Currently, many long stretches of BRE are very close to the river bank line. Hence when embankment is breached at many places it is often left open as closing of such breach is becoming impossible. Consequently, security of the area protected by the BRE has been seriously threatened and large areas of land and Cities with large population like Sirajganj are exposed to flooding.

The priority reach is experiencing severe bank erosion on an annual basis threatening productive land and private and public physical assets on the river-side of the embankment. The dilapidated embankments breach occasionally, due to these bank erosion, causing severe floods in the floodplain. Damages from this phenomenon are explained in the following sections.

4.2.2. Damages from Jamuna Right Bank Erosion

A morphological model has been developed by the design consultant to study the historical trends in morphological changes of Jamuna and its floodplain erosion, and to predict the future river bank erosion for next 30 years. The erosion of floodplains will in turn affect the agriculture land, residential and community structures. Detailed estimate on the projected annual damages is given in **Table 4.2** and the annual cost of these losses are estimated to be about BDT 1.36 billion (US\$ 18.3 million) in 2015 prices. This would be the value of damages in the no project scenario.

Table 4.2: Estimates of annual of loss of land and destruction of structures from bank erosion

Annual Loss of Land		Annual Loss of Residential Structures		Annual Loss of Community Structures	
Type of Land	Area, ha	Type ¹¹ of Structure	Number	Type of Structure	Number
Agriculture	103.8	Pukka	6.8	Schools	1.4
Settlements	73.5	Semi-pukka	58.0	Community clinic	0.1
Roads	0.4	Kutchra	1033.1	Family welfare centre	0.1
Water Bodies	22.3	Jhupri	7.1	shops	4.0
Total	200.0	Total	1105.0	Total	5.6

Source: Financial and Economic Analysis of RBIP

Annual damages from Jamuna right bank erosion and cost of these damages are summarized below:

- About 200 ha of land, including about 104 ha of agriculture land, will be lost annually to the river and total value of these land lost is estimated to be about BDT 1.18 billion (US\$ 15.1 million). The affected land also includes about 22 ha of water bodies that provide habitat for floodplain aquatic species and spawning grounds for migratory fish species.
- About 1,105 residential structures (93.5 percent structures are adobe/mud walled) will be lost annually to the river and total value of these structures is estimated to be about BDT 0.15 billion (US\$ 1.9 million). The relocation cost of the households is estimated to be about BDT 16.6 million (US\$0.20 million).
- About 5.7 non-residential structures such as schools and shops will be lost annually to the river and total value of these structures is estimated to be about BDT 9.8 million (US\$ 0.13 million).

4.2.3. Damages from Breach of BRE

Breaches of the embankment cause flooding of the floodplains damaging the standing Aman paddy, livestock, houses, and other social and physical infrastructure, and livelihood of the local communities. Historical data on annual flood damages of last 27 years was collected from local government offices and a summary of extent of these damages are presented below. It can be expected that without the project scenario, the extent of damages will be similar in future.

- About 7,000 ha of Aman paddy (main crop in flood season) is completely damaged and about 4,900 ha are partially damaged annually. Total average annual value of damaged crop is estimated to about BDT 669 million, (US\$8.6 million).
- About 396 animals are lost each year and value of these animals estimated to be about BDT 4 million (US\$ \$50,000).
- About 51,735 houses are damaged each year. About 80 percent of these houses are semi-permanent structures that are partially damaged and remaining 20 percent are temporary structures that are fully damaged. Value of these damages on structures is

¹¹Pukka house is brick walled house; semi-pukka house is partly brick and partly adobe walled; katcha house (adobe/mud walled), and Jhupri is a house made up of thatches and reeds

estimated to be about BDT 7.2 billion (US \$113 million). In addition the values of moveable assets (furniture, appliances, food, etc.) that are damaged with the houses are estimated to be about BDT 1.47 billion (US \$18 million).

- About 130 km of paved road, and 148 km of unpaved road would be damaged each year if there is no project. Similarly, on an average each year about 9.3 bridges and culverts will be fully damaged, while 6.3 bridges and culverts will be partially damaged. Without the project the anticipated average annual loss will be about BDT 1.5 billion (US\$19.5 million).

4.2.4. Current Approaches by BWDB to address Bank Erosion

In the absence of the proposed project, right bank erosion of Jamuna would continue and damage floodplain agriculture land and settlements and infrastructure. The BWDB generally respond to these problems by (i) accepting the bank erosion and relocating the embankment periodically and repeatedly and (ii) emergency protection works to control the erosion and retirement of embankments. However, both these approaches are not acceptable, neither to the BWDB nor the local population due to their low reliability.

If the first approach on accepting the bank erosion is continued, there is still a large length of the embankment that would be exposed to risk of erosion even under relatively low rates of bank erosion. There are also locations where it is difficult to retire the embankment without jeopardizing existing settlements due to flood spills. Over the long-term, this approach could also result in the river developing new distributary channels on the river bank (for example a partial avulsion or enlargement of the Bangali River).

The second approach on emergency response represents a continuation of the recent practice by BWDB over the last five to ten years: To avoid major flood damages and to maintain a limited set-back from the riverbank protection works are usually carried out on an emergency basis and involves constructing conventional revetment structures along the bank and retiring the embankment where it comes under unexpected erosion. The main disadvantages of this approach are (a) the work is completely reactive in nature and results in frequent embankment erosion and flooding; (b) the available funds are limited so that only short sections can be protected and (c) by the time the projects are implemented the erosion has already reduced the set-back to the point that the embankment needs to be retired.

4.3. Alternatives for River Bank Protection

The concept of providing systematic protection started with the development of “hard points” in the early 1990s as part of the Flood Action Plan, Component 1 (FAP1). With the exception of construction at two locations, the technically demanding and expensive FAP1 strategy was not implemented by BWDB and alternative strategies were developed. As an alternative, the BWDB developed and implemented lower cost “groynes” from the end of the 1990s until the mid-2000s. While these were initially successful, eventually most of these groynes failed due to increasing protrusion and river attack. After repeated failures, BWDB gradually abandoned these groynes. From the early 2000s BWDB pilot-tested and implemented low-cost “revetment” based on earlier FAP1 and FAP21 technologies. The technology was incorporated into the Guidelines for Riverbank Protection 2010, and is the most inexpensive and sustainable one. It has proven stable along 17km of riverbanks in the Brahmaputra/Jamuna. These long-guiding revetments are systematically replacing the other options when those fail. These three options are considered for analysis of alternatives. In addition, one more alternative of

building revetments in to the river is also considered. A brief description of these alternatives is presented below and the comparative analysis is presented in **Table 4.3**.

- **Option 1: Hard Points.** One of the alternatives for riverbank protection is constructing the hard points as recommended in the FAP-1. Hard-points only place erosion-resistant revetments at discrete locations spaced some distance between them. The hard points are generally located at the bankline following the original design concept, however a few need to protrude further from the bank to maintain reasonable flow lines along the bank. A layout of hard points is shown in **Figure 4.1**. The required length of hard points is 2.5 km for the priority reach.
- **Option 2: Long guiding revetments.** Option 2 follows BWDB's more recent approach to stabilizing the riverbanks by building long guiding revetments covering several kilometers of riverbank and as such stabilizing the bankline channel leading to parallel flow along the riverbank. BWDB has built around 30km of long guiding revetments during the last 10 years, which consist of sand-filled geotextile bags, similar to the apron work built in Sirajganj in 1999, and which are constructed from the river through systematic placement. This construction method and a flexible response to riverbank erosion ("adaptive approach") has made riverbank protection works sustainable to an extent not achieved before. A layout of revetments is shown in **Figure 4.2**. The proposed revetment builds on existing and BWDB approved works along the right bank, and will maintain a setback of generally 400 m to the embankment. The total length of new revetment is 15.6 km over the 50 km Priority Reach.
- **Option 3: Long guiding revetments built into the river.** Option 3 was suggested by World Bank with the rationale to reduce the resettlement impact by building an additional strip of land in front of the existing riverbank where a newly constructed embankment would be located. This construction into the river does minimize the amount of resettlement. The technical approach would consist of the filling of an on average 280m wide strip of land along the existing riverbank and into the main channel, compaction of the loose fill, dredging and protection of the riverbank against riverbank erosion, and construction of the embankment on the fill with a safety margin of 50m from the riverbank. The result would be a perfectly shaped, man-made riverbank, protected against erosion. Despite the avoidance of resettlement, the land acquisition cost would be incurred as part of the program cost, as BWDB would have to pay the landowners for the whole swath of newly established land.
- **Option 4: Groynes and Spur.** A spur may be defined as any solid projection from the river bank into running water. **Figure 4.3** shows the layout of a groyne. The end of the groynes is generally located at the bankline, although a few will protrude further from the bank to maintain reasonable flow lines along the bank.

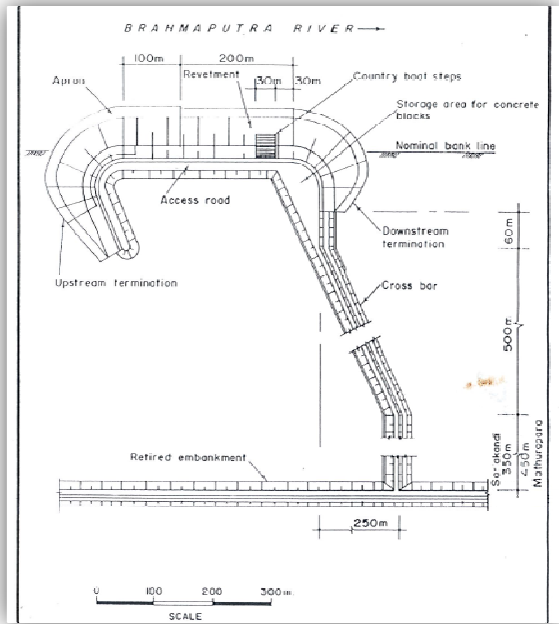


Figure 4.1: Hard Point

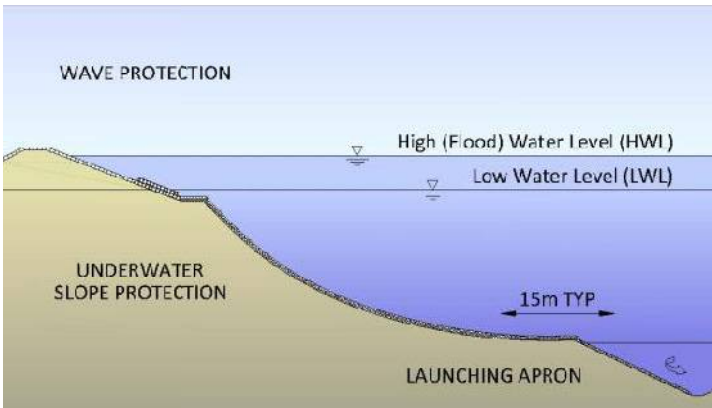


Figure 4.2: Revetment

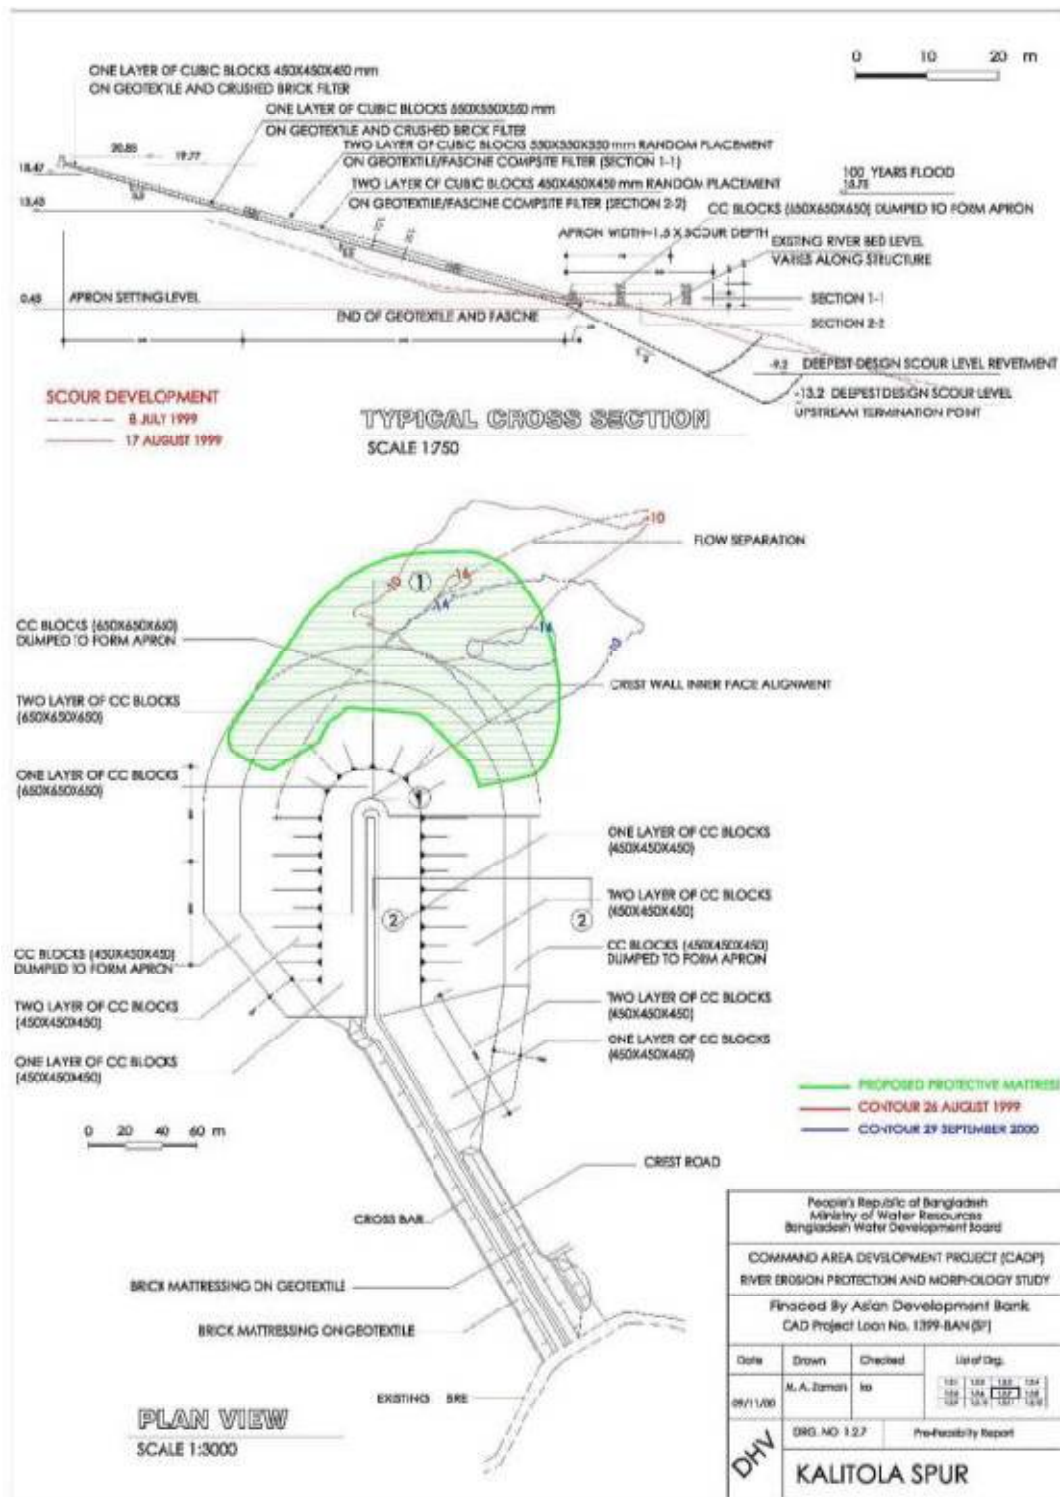


Figure 4.3: A Typical Groyne

Table 4.3: Analysis of River Bank Protection Alternatives

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
Technical Aspects				
New riverbank protection	2.5 km	16 km	50 km	15 km
Strengthening of existing protection works	15 km	15 km	0 km	15 km
Degree of protection	Limited protection Partial protection with erosion between hard points, specifically under angular attack	Consistent protection Revetments will not cover all of the riverbank leaving some areas in natural conditions, downstream of convex curvatures, which are naturally protected	Full protection Complete coverage of the sensitive fill built into the main channel	Limited protection Similar to Option 1
Constructability	Medium complexity Dredging requirement for termination points, cross bar located on floodplain	Low complexity Simple construction along the existing riverbank, making use of proven technologies	High complexity Massive dredging and fill operation followed by challenging compaction under water and dredging of flat riverbanks for slope protection. Revetment construction similar to Option 3	Medium complexity Same as option 1
Robustness	Low Deep scouring and high turbulence are the main reasons	High Long guiding revetments are associated with minor	High Long guiding revetments are associated with minor	Low

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
	for failure of riverbank protection	scouring and smooth parallel flow	scouring and smooth parallel flow	
Scour	High 6.0 m is the scour depth Scour is high at end section and the structure is unsafe. Out flanking of structure is another major problem. Some erosion occurs between the hard points and embankment may need to be retired due to embayment.	Low 30m is the depth of the scour Less scour compared to hard point or groyne. Holds existing shore line with systematic protection. Minimal impact to other sections of the river. Adaptive measure for river bank protection.	Low 30m is the depth of the scour Unconsolidated soil is likely to cause repeated failure of revetment.	High 60m is the depth of the scour
Loading	High High localized increase in flow velocities and turbulence, deep, fast scouring	Low Small increase in flow velocities, scour depth half of the scour of hard points	Low Small increase in flow velocities, scour depth half of the scour of hard points	Medium
Maintenance requirements	High The design and function and hard points inherently create severe hydraulic conditions that the structure must accommodate. On this basis, hard points are subject to more risk, which is reflected by higher maintenance and emergency repair costs.	Low	Low	High Similar to hard points. In some cases, maintenance costs of groynes and hard points can equal or exceeded the original construction costs
History of performance	Repeated failures The hard point structures	No failures	No experience	Repeated failures

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
along Jamuna	experienced considerable damage due to repeated undermining by scour. The main problems were associated with the deep scour at the upstream end due to outflanking and geotechnical stability problems associated with the dependency on launching aprons on curved slopes.			Problems are similar to hard points
Financial Aspects				
Construction cost (without cost of land acquisition)	Medium 290M Capital cost is high since the design has to cater to deepest scour. The cost also depends on the spacing of the hard points and is higher than for Option 2.	Low 115M Consistent revetments are the lowest cost option	High 635M The complete revetment has to be built not allowing to make use of the existing revetments	Medium 229M Groynes and hard points are constructed further into the river channel where geotechnical conditions are less favourable, which adds to the construction costs and increases the risk of failure
Maintenance cost	High 2 to 10% of construction cost	Low 0.4% of construction cost	High 2 to 10% of construction cost	High 2 to 10% of construction cost
Environmental Aspects during Construction				

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
Project Footprints	High Footprints are higher compared to other options due to higher crest elevations (e.g. 17.3m at Sirajganj compared 12.5 m for revetment), higher size of aprons (100m width compared to 50 m width for embankment) and higher surface area of structure	Low Lower footprints compared to other options. Crest level of revetment is equal to floodplain level (12.5 m at Sirajganj)	High Higher footprints due to new construction of entire 50 km of revetment in to the river	Higher Footprints are similar to hard rock due to similar crest level and apron size.
Impact on Chars during construction	Medium While the initial construction along the riverbank does not impact on the river, later erosion between the hard points leads to a marginal increase in chars and shoals	Low The continuous revetment does not add or reduce the space for the river. However, the revetment attracts flow and leads to a stable channel along the riverbank and stabilizes the char and shoal pattern opposite to the bank.	High The construction into the river reduces the overall area for chars. After construction the effects are similar to Option 2.	High The construction into the river reduces the overall area for chars.
Material requirements	High The crest of the hard point is about 5 m higher than the guiding revetment, which adds considerably to the material requirements compared to the guiding revetment	Low Low material requirements compared to other options. Material from the existing embankment can be used for construction of new embankment	High Higher material requirements due to new construction of entire embankment and also requirement of huge dredging (42 million cubic meters) for filling of associated new embankment	High Similar to hardpoints
Impact on	Limited impacts	Limited impacts	Significant impacts	Medium impacts

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
aquatic habitat	Some benthic fauna may be impacted during construction	Some benthic fauna may be impacted during revetment installation.	on aquatic fauna are likely because of works inside the river	on aquatic fauna are likely because of works inside the river
Environmental Aspects during O&M				
Impact on right bank	High About 117 ha on right bank would be eroded, at locations where there is no existing protection due to embayment between the hard points.	Low No impact on the right bank	Low No further erosion of river bank. Some additional land will in fact become available because of the riverbed reclamation	High About 221 ha of right bank land will be eroded where there is no protection works due to erosion between groynes
Changes in char patterns	Low The hard points do not impact on the char pattern	Medium The char pattern gets more stabilized which might lead to higher land use and reduced area for wildlife	High The char area is reduced due to the increase in land along the riverbank and based on the need to dredge around 42 million cubic metres of sand from the chars for filling the area alongside the riverbank	Low
Changes to river channels	Low The increasing protrusion of the hard points leads to a more pronounced “meandering” channel pattern	Low The continuous protection straightens the channels along the riverbanks	Medium After pushing the main channel into the river the result is similar to Option 2	Low
Changes to river flow	High Turbulence and flow velocities	Low A slight increase due to the	Low Same as Option 2	High Same as hard points

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
patterns	increase with increasing protrusion	smoother protected bank is compensated by a reduction due to a more stable larger channel		
Changes in river depth	Low Apart from localized scour holes no fundamental change	Medium The channel along the bankline will be deeper overall than unprotected channels.	Medium Similar to Option 2	Low Similar to hardpoints
Changes in flow velocities	High 5.8 m/s Turbulence and flow velocities increase with increasing protrusion	Low 3.7 m/s No significant change	Low Same to Option 2	High 5.8m/s Similar to Option 1
Impact on aquatic habitat	High Changes in flow patterns, velocities and scouring will have an impact on the aquatic habitat along the hardpoint	Low Revetment works may provide good habitat conditions for fish due to regulation of channel flows. Geo-bags and concrete blocks may also provide suitable habitat conditions for benthic fauna	Low Similar to Option 2	High Similar to Option 1
Social Aspects				
Land acquisition	Medium Land acquisition on floodplains is required in addition to land along the bankline. While the	High While no land required on the floodplain longer reaches along the riverbank where	Low No floodplain land required	Medium Similar option 1

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
	land for revetments is low value and located along the low water line, hard points make use of higher value land on the floodplain for the connection with the existing embankment line.	land has little economic value		
Resettlement	Medium On floodplain and to be considered for known erosion between hard points	Medium The high risk area along the existing bankline is sparsely populated, often mainly by squatters	Low No resettlement	Low
River access	Medium Not good at eroding banks between hard points but easy at the hard points	High The river is easily accessible over the mildly sloping revetment	High Same as Option 2	
Protection from future erosion	Medium The limited protection and known outflanking lead to additional erosion of land between the hard points.	High Consistent protection along the riverbank	High Same as Option 2	Medium Same as Option 1
Protection of the embankment	Medium The limited protection entails the risk of outflanking and erosion of the embankment	High Safety margin to the embankment on consolidated floodplain reduces the risk of embankment erosion	Medium The new fill is susceptible to liquefaction under earthquake which leads to an increased risk of embankment failure	Medium Same as Option 1
Changes to navigation	Low The turbulent flow around	High The smooth parallel flow	High Same as Option 2	

	Option 1 Hard Points	Option 2 Revetment at Riverbank	Option 3 Revetment in the River	Option 4 Groynes
	increasingly exposed protrusions does not improve navigation conditions	along a pronounced channel encouraged by the revetment improves navigation.		
Displacement of char people	Low Construction along the riverbank and future outflanking lead to potentially slightly increased char area	Low The revetment does not impact on the char area	Medium The reclamation of riverbank goes at the cost of char area.	
Conclusion	Not recommended Not a preferred option because of technical difficulties, high environmental impacts and also high initial as well as recurring costs compared to other options.	Recommended Preferred option because of lower costs, limited environmental impacts, and substantial social benefits.	Not recommended Not a preferred option because of high costs, technical difficulties, and significant environmental impacts.	Not recommended Same as Option 1.

Embankment and Road Options

BWDB is mandated to build roads on flood embankments. It is common, world-wide practice to provide emergency access alongside flood embankments in order to provide better access to the area during emergencies. The embankment built under this program will have provision of a higher standard than the emergency roads alongside flood embankments due to its use for regional and inter-regional connectivity. Currently, annual repair maintenance allocation of the BRE is insufficient even to attend regular maintenance work. If the proposed road would be a toll road, then there will be a scope for revenue generation, which can be used for future maintenance of the project.

The following four embankment and road options have been compared against a set of the criteria presented in **Table 4.1**. Profile of the embankment and road for 2 lane and 4 lane options is shown in **Figure 4.4** and comparison shown in **Table 4.4**.

- Option 1: Widening of existing embankment with local road.
- Option 2: Reconstructed embankment with improved alignment on the floodplain with two-lane road at safe distance from the riverbank with a provision for toll collection.
- Option 3: Reconstructed embankment with improved alignment with separate four-lane highway as through road and adjacent local roads and bridges for crossing the highway. This option reflects the suggestion of World Bank to study a dedicated four lane highway.
- Option 4: Embankment on filled land in the river with separate four lane highway and local road connections similar to Option 3. This option combines World Bank's specific suggestion for a four-lane highway and construction into the river.

4.3.1. Option 1: Widening of existing embankment with local road

Option 1 comprises a simple upgrade of the existing embankment line to the design water levels and defined side slopes of 1V:3H. As such the embankment fulfills basic stability criteria, but is insufficient for seepage under design conditions and load combinations. The widening will be conducted towards the river so that the squatter households along the country side will not be affected. In places where the existing embankment is dangerously close to the unprotected riverbank the embankment will be retired.

4.3.2. Option 2: Reconstructed embankment on the floodplain with two-lane road at safe distance from the riverbank

Present BRE alignment is too much zigzag because of repeated retirement. Due to lack of proper maintenance, existing embankment section is not sufficient for seepage and vulnerable to damage during flood. Existing height of the embankment is below to the present design requirement and subjected to overtopped at different locations. Option 2 consists of the new standard embankment incorporating a two-lane road at the country side. The embankment is designed for a broad range of loads and load combinations, including earthquake, and failed drainage. This embankment is wider than the one from Option 1, as it is fully stable against seepage. The road serves the dual purpose of connecting the local population to the nearest growth centers while providing a through road from the Jamuna Bridge to the new Teesta Bridge near Chilmari. To this end the road is built to RHD highway standard and able to carry heavy traffic, and will be equipped with toll stations. The road is not meant to be a competition to the existing

highway network as laid down in government's highway master plan. The road requirements straighten the embankment and provide the opportunity to reclaim 165 ha of char land. Option 2 provides the bench mark in terms of location on the floodplain and footprint as it provides the minimum technically stable solution.

4.3.3. Option 3: Embankment on the floodplain with separate four-lane highway as through road and adjacent local roads and bridges for crossing the highway

Option 3 is similar to option 2 but with a provision of a four-lane dedicated transport link from north to south including toll collection for cost recovery. This road link would be built on a wider reconstructed embankment. As a consequence of a fenced dedicated highway the existing rural road network needs to be connected independently and lead over the highway with dedicated bridges. In addition, a large number of smaller overpasses will be required to allow the local population access to the river and communication with local boats to the chars.

4.3.4. Option 4: Embankment on filled land in the river with separate four lane highway and local road connections similar to Option 3

Option 4 develops Option 3 one step further by moving the highway away from the floodplain into the river. To this end a strip of land will be reclaimed through dredge-fill along the bankline and secured against erosion. Similar to Option 2 a number of bridges will be required to access local river ghats and to provide the local population with general access to the river. While this solution does not result in resettlement, the BWDB nevertheless has to acquire the raised land from local land owners and Government and land acquisition cannot be avoided. This option would protect an additional 1,980ha of newly reclaimed land, at the additional cost of USD 250,000 per ha.

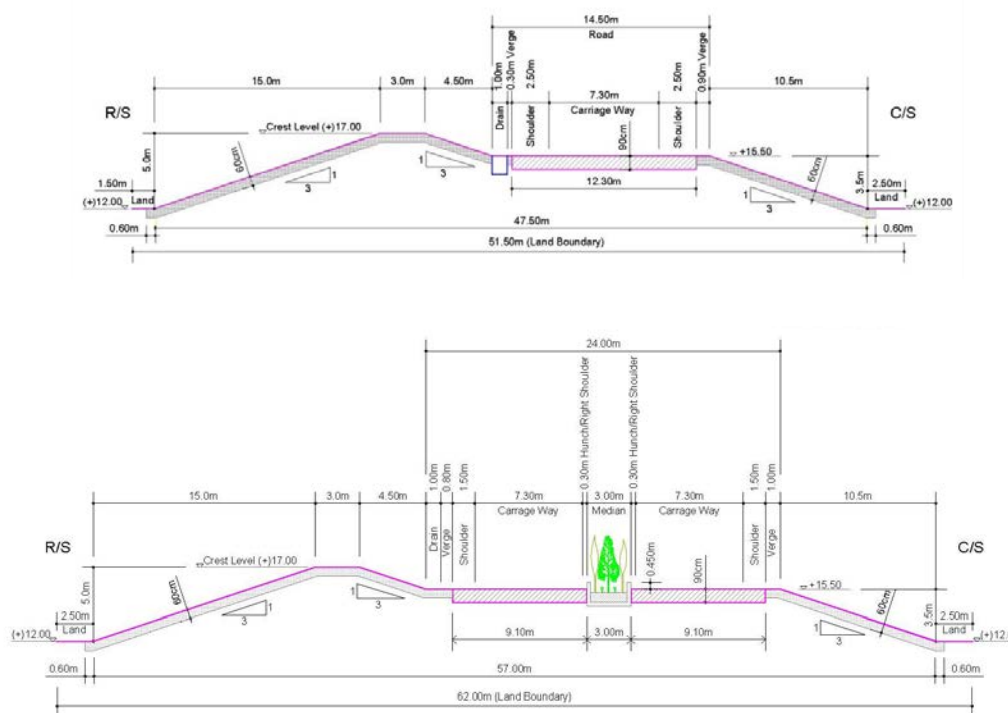


Figure 4.4: Comparison of two- and four-lane road options

Table 4.4: Analysis of Embankment and Road Alternatives

	Option 1 Widening existing embankment	Option 2 Reconstructed embankment, 2 lane road	Option 3 Reconstructed embankment, 4 lane road	Option 4 Reconstructed embankment, 4 lane road in river
Technical Aspects				
Length of embankment	50 km widening of existing embankment	32 km reconstruction of existing embankment 18 km new realignment	32 km reconstruction of existing embankment 18 km new realignment	50 km of new alignment
Degree of protection	Low Does not provide full seepage safety and is not stable for typical loading combinations	High Fully complies with stability requirements	High Same as Option 2	Medium construction on recent fill is associated with higher seepage and liquefaction risk than old consolidated floodplain
Mobility within the local area	Medium Local connection over the embankment crest	High Good local connection	Medium Dedicated road with limited number of overpasses	Medium Similar to Option 3
Regional mobility	Low Slow connection over winding embankment	High Fast connection over straight road	Medium Connection through feeder roads to toll entry points	Medium Same as Option 3
Interregional connectivity	Low Not attractive for through traffic	Medium Direct interregional link	High Direct dedicated link	High Same as Option 3
Constructability	Low complexity Simple construction	Low complexity Simple construction making use of proven technologies	Low complexity Same as Option 2	High complexity Massive dredging and fill operations
Maintenance requirements	Low	Medium Road and sluice gates require higher maintenance	Medium Same as Option 2	High Work on fill requires locally higher maintenance
Financial Aspects				
Construction cost	Low	Medium	High	High

	Option 1 Widening existing embankment	Option 2 Reconstructed embankment, 2 lane road	Option 3 Reconstructed embankment, 4 lane road	Option 4 Reconstructed embankment, 4 lane road in river
			High road coast	
Cost recovery for O&M of embankment	Nil No option to collect toll.	High Dedicated toll stations can recover a good part of the maintenance cost	Medium Lower than Option 2 as the road maintenance is higher	Low Lower than Option 3 as the road maintenance is higher
Environmental Aspects				
Project Footprints	Low Width of embankment is about 25m	Medium Width of embankment is 51.5 m	High Width of embankment is 62m	High Width of embankment is 62m
Material requirements for construction	Low Only fill is required for widening	Medium	High Higher embankment and fill compared to Option 2 due for four lane road, fencing, and local road connections with dedicate overpasses	High Similar to Option 3 but additional efforts, such as stone columns for compaction of the unconsolidated fill under the embankment
Impact on aquatic habitat	Medium	Low Low impacts due to construction of regulators to maintain ecological connectivity between river and floodplains	Low Same as Option 2	High
Additional flood protected land	None	Medium 165 ha of reclaimed char land	Medium Same as Option 2	High 1980ha of reclaimed land along the riverbank
Segregation of landscape	Low The standard	Medium A two lane highway is more difficult to	High A fenced four lane highway	Medium Same as Option 3

	Option 1 Widening existing embankment	Option 2 Reconstructed embankment, 2 lane road	Option 3 Reconstructed embankment, 4 lane road	Option 4 Reconstructed embankment, 4 lane road in river
	embankment does not pose a major dividing element at all places	cross but allows easy river access at all places		
Social Aspects				
Amount of land required	Low Maximum use of existing land	Medium Partial use of existing land	High Wider than Option 2 and therefore more land required	High Same acquisition as for Option 3.
Number of people displaced	Medium Displacement of squatters and some new acquisition	Medium Higher than Option 1 due to the overall wider footprint	High Wider footprint than Option 2 due to the wider road	Low No displacement as built on newly filled land on river
Access to the river	High No major obstacle	Medium Crossing the highway could locally reduce the access	Low Access is limited to the locations of overpasses	Low Same as Option 3
Impact of traffic on community	Low Low traffic volume and speed	High Faster and mixed traffic with increased noise, accidents etc.	Medium Segregated traffic with reduced accident risk but higher noise levels	Medium Same as Option 3
Conclusion	Not recommended	Not Recommended Though this option has less environmental footprints and less cost compared to Option 3, recognizing the future development needs in the fast growing communication sector – this option is not recommended	Recommended	Not recommended

4.4. Alternatives for Embankment Materials

Construction of embankment and road requires huge amounts of earth fill. The following sources are considered as the sources of borrow material for earth fill:

- Alternative 1: Entire embankment is constructed with soil excavated from the floodplains and agriculture land.
- Alternative 2: Embankment to be constructed with dredged sand from the river bank and soil cladding.

Constructing the embankment with soil (Alternative 1) is a technically viable and perhaps the least cost option. However the soil will have to be either transported from long distances or obtained from the local areas thus significantly affecting the already scarce cultivation lands. Hence this option is not being considered for embankment construction.

The cost of Alternative 2 could be slightly higher than the other option discussed above. However the biggest advantage of this option is that it will avoid any adverse impacts on the cultivation lands of the area. There could be some localized and temporary impact on the aquatic habitat/fauna during the sand extraction from river bank and these impacts can be minimized with the improved sand extraction methodology and locating the extraction points away from the sensitive aquatic habitats. Alternative 2 is recommended for as source of earth fill primarily to avoid any impacts on the floodplain agriculture lands.

The source of cladding material of the embankment is usually extracted from the floodplain agriculture lands. In the RBIP, the material from the unused embankments will be used as cladding material.

4.5. Alternatives for Regulators

During Construction of BRE a good numbers of regulators were built on the embankment to provide lateral fish migration between the river and floodplains and also to provide drainage and supplementary Irrigation facilities. But most of them were engulfed into the Jamuna river due to erosion. During retirement or re-construction of BRE those engulfed regulators were not rebuilt and at those regulator points the natural channels were closed permanently. As a result the natural connectivity has been lost and there have been some problems with the natural drainage and supplementary irrigation. Following three alternatives were considered to address the problems:

Alternative 1: No new regulator and no rehabilitation of fish pass. This is the least cost option, avoiding any capital cost as well as any environmental and social impacts associated with the construction/rehabilitation activities. This option however is likely to have adverse impact on the ecological connectivity of the area with the main Jamuna river, resulting in reduced fish production and hence reduced livelihood for the local population

Alternative 2: rehabilitation of existing regulators and fish pass. This option will result in capital cost associated with rehabilitation works, in addition to environmental and social impacts associated with the rehabilitation works. This option will eventually result in restoration of ecological connectivity that has been lost because of the dysfunctional regulators

Alternative 3: Rehabilitation of existing regulators and fish pass, and construction of additional regulators. This option will obviously result in higher capital and O&M costs

compared to the second option discussed above. The environmental and social impacts associated with the construction activities will also be higher than those associated with the second option. However this option will enhance the fish production from the floodplains and hence enhance the livelihood of local fishermen. Therefore this option has been preferred over the other alternatives. Total seven regulators and two culverts will be constructed/ rehabilitated in the priority reach. Moreover, the lost connectivity of the natural channel system will be re-established by re-excavation of the links under project condition.

4.6. Alternatives for Resettlement Sites

The project requires resettlement of about 5,732 households. Based on the recent experiences in Bangladesh on similar projects on embankment rehabilitation and Padma Bridge, the following four alternatives are considered for planning of resettlement sites:

- Alternative 1: No Resettlement Site (RS). Affected households (hh) will be encouraged to relocate on their own with eligible compensation and assistance from the project and provision for additional incentives.
- Alternative 2: Large RS sites (for 300 to 500 hhs) to be development by the project
- Alternative 3: Small Group (10 to 20 hhs) relocation by members of extended families
- Alternative 4: Small RS Site – within the same area with access to existing civic amenities

A comparative evaluation of these alternatives is presented in **Table 4.5**. All alternatives, exception Alternative 2 on development of large resettlement sites will be followed up under RBIP.

Table 4.5: Analysis of Resettlement Site Alternatives

	No RS Site	Large RS Sites	Small Group	Small RS Site
Technical	Reduce further acquisition of land for resettlement sites; people choice their own place of choices within the vicinity of the existing communities.	Involve massive acquisition of land affecting new set of households s requiring resettlement	No land acquisition needed. People move on their own on residual land and/or buy land for resettlement	Minimum LA for RS site development; available BWDB land may be used in some instances
Financial	Cost of building construction sites will be avoided	Expensive; about \$1 million per sites (4 to 5 sites) would be required	No additional costs to the project except for provision of support of amenities such as tube-well and access roads	Low costs in RS site development; on site minimum amenities

	No RS Site	Large RS Sites	Small Group	Small RS Site
Environmental	Minimal environmental issues in such relocation, because there is no major concentration or cluster in one site.	Many environmental issues related to large sites – water, sewerage, sanitation, health etc.	No or very limited environmental impacts	Minimum environmental impacts
Social	People with residual land and/or support from kin/relatives will have easier time to resettle; those without land will have hard time finding a place to relocate.	Cyclical impacts and displacement; fragmentation of social and community ties; host village issues	Well integrated new community in the resettled villages/settlement; no potential conflict; due monitoring of relocation for eligible social programs	Limited or no disruption due to relocation; access to already existing amenities – no host area issues
Conclusion	This is a preferred option expressed by many affected households on the ROW, including those to be relocated from the embankment.	To be avoided as much as feasible due to linear project over 50 km	Encouraged with incentive such as additional cash - to take own decision on resettlement	Encouraged, because many affected households expressed their desire to remain within their own community

5. Description of Physical Environment

This chapter describes the existing physical environmental conditions of the project area. This description has been prepared with the help of secondary literature review and field data collection.

5.1. Brahmaputra River Overview

The hydrology and inundation cycles of the study area is dominated by the Jamuna River. The River is the 240 km-long lower reach of the Brahmaputra River from the India-Bangladesh border to the confluence with the Ganges. The river originates in the northern Himalayas in Tibet, flows through China as the Yarlung Tsangpo and India as the Brahmaputra and enters Bangladesh at Noonkhawa. The Teesta, Manas, Sankosh, Dharla and Dudhkumar rivers are the major tributaries of Brahmaputra. Downstream of Teesta, at Dewanganj, the Old Brahmaputra originates on the left bank of the Brahmaputra and main channel flows as Jamuna until it reaches Aricha, where it combines with the Ganges to form the Padma river. The Brahmaputra-Jamuna river system displays characteristics of a braided river and is highly susceptible to migration and avulsion. In plan form, the river typically shows two to three channels per cross-section and a total width of 8 to 12 km. The Brahmaputra/Jamuna is characterized by its widening as a consequence of the Great Assam Earthquake in 1950. In Assam, India it has widened along its 650km length from an average 6 to 9km and along its 250km in Bangladesh from 8 to 12km.

The Jamuna has an annual average discharge of around 20,000 m³/s at Bahadurabad transit. Over 75 percent of the discharge of the Jamuna river is generated from rainfall and snowmelt from upstream countries, as a result, the flow pattern is not strongly related to local precipitation.

The mean monthly flow discharges of Jamuna are shown in **Figure 5.1** at Bahadurabad transit station. **Table 5.1** shows the seasonal mean discharge values of the Jamuna river from 1976 to 2011 at Bahadurabad transit station. The river usually peaks in July when the average maximum discharge is about 50,000 m³/s and flow reduces in the dry season with average lowest in February at 4700 m³/s. Historical analysis displays an increasing trend of average annual peak flows at Bahadurabad in Jamuna river. The lowest and highest flows recorded during 1976 to 2011 are: 3,178 m³/s on 24 February 2001 and 102,535 m³/s on 09 September 1998.

Table 5.1: Seasonal Mean Discharge (1976 - 2011) of Jamuna

Season	Jamuna River (Bahadurabad Transit)
m ³ /s	
Dry (December-February)	6,014
Pre-Monsoon (March-May)	10,300
Monsoon (June-September)	39,700
Post-Monsoon (October-November)	18,760

Source: Bangladesh Water Development Board

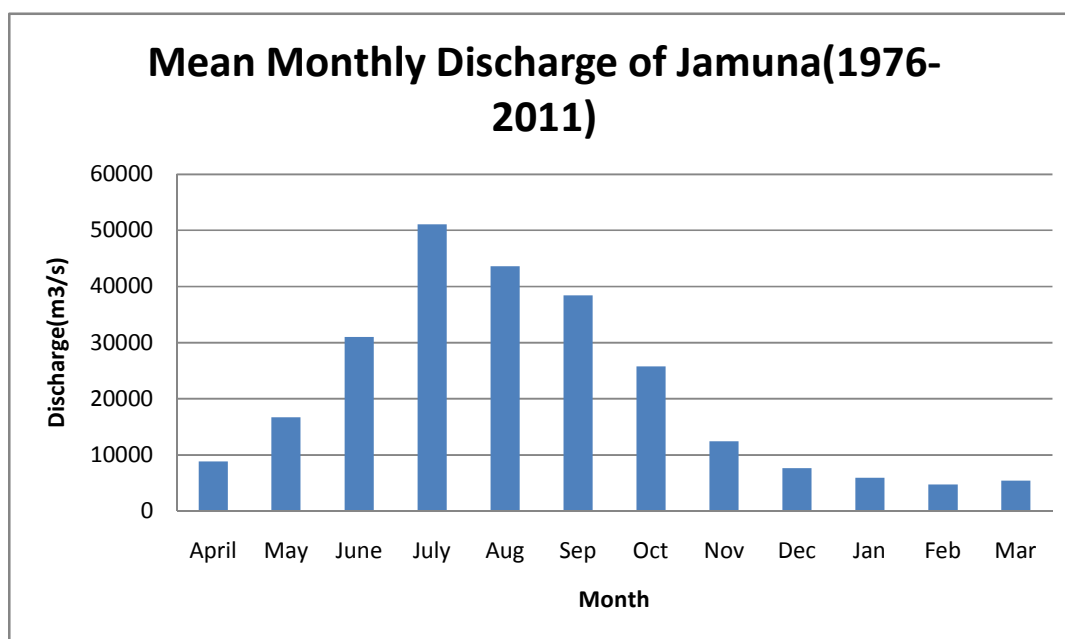


Figure 5.1: Mean Discharge of the Jamuna river(1976-2011)

(Source: Bangladesh Water Development Board(BWDB))

Secondary data on water level were also collected for the Jamuna at Sirajganj. The data shows that the water level in the Jamuna river varies from 15.11m to 6.05m. The highest water level occurs in July which has an average monthly water level of 13m and the lowest in February with average water levels. **Table 5.2** shows the average values of water levels of the Jamuna in different seasons (1945 to 2013).

Table 5.2: Water levels of Jamuna (1945-2013)

Season	Jamuna River (Sirajganj station)
m+PWD ¹²	
Dry (December-February)	7.4
Pre-Monsoon (March-May)	8.8
Monsoon (June-September)	12.5
Post-Monsoon (October-November)	10

Source: Bangladesh Water Development Board

Flood frequency analysis was also conducted on the long-term historical water level data recorded at Sirajganj, Kazipur and Mathurapara. The two stations at Sirajganj and Mathurapara span the extent of the Priority Reach. The record length at Maturapara is considerably shorter than at the other stations. The results are summarized in **Table 5.3** for the three stations. The upper and lower 95 percent confidence limits show the range in the estimates is typically ± 0.4 m of the mean values. These results indicate that during

¹² Public Works Department datum. A horizontal datum applied by PWD, BWDB and others. It is defined by a network of SOB and BWDB benchmarks with a specified elevation above PWD. Its zero level is located 0.46 m below the Mean Sea Level (MSL) defined in 1909.

extreme floods, the water level increases by about 4.3 m between Sirajganj and Mathurapara. The long-term average annual minimum water level in the Priority Reach is 6.9 m PWD at Sirajganj, and 10.5m PWD at Mathurapara.

Table 5.3: Water level (m) frequency analysis at gauging stations

Station	50-year	100-year	200-year
Sirajganj	15.1	15.3	15.5
Kazipur	16.8	16.9	17.0
Mathurapara	19.1	19.5	19.8

5.2. Climate

The project area lies in the northwest part of Bangladesh where the climate is sub-tropical in nature with three seasons namely summer/pre-monsoon from March to May, monsoon from June to October, and winter season from November to February. Lower rainfall makes this area both atmospherically and pedagogically drier than the rest of the country. The rainy season is hot and humid with about 88 percent of the annual rainfall in the area. The winter is predominately cool and dry. The summer is hot and dry interrupted by occasional heavy rainfall, whereas monsoon comes in the month of June and recedes in late October. Meteorological data such as rainfall, temperature, humidity and wind speed were collected from Bangladesh Meteorological Division (BMD) and analyzed for assessing local climate that are directly related to water resources of the study area.

5.2.1. Temperature

Temperature data of Bogra station for the period 1948-2010 has been used for this report. The data shows that the monthly maximum temperature varies from 25°C to 35°C. Maximum temperature occurs in the month of April and minimum temperature in January. Monthly minimum temperature ranges from 21°C to 30°C. The average temperature during monsoon is about 34° C. **Figure 5.2** shows the monthly maximum, mean and minimum temperature at Bogra station.

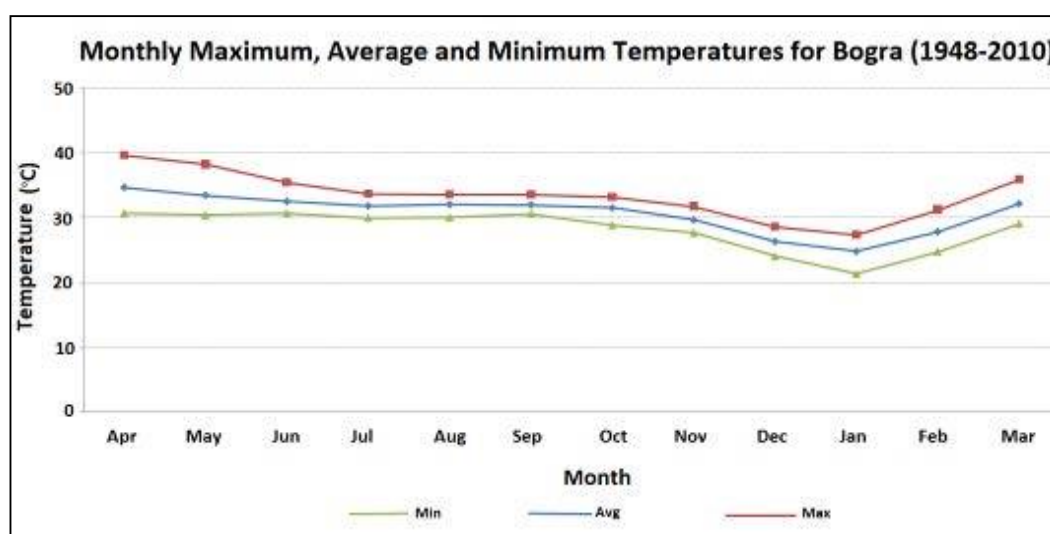


Figure 5.2: Monthly Temperature Data for Project Area

Source: Bangladesh Meteorological Department (BMD)

Yearly data of average, maximum and minimum temperature have also been analyzed for the same station (from 1948-2010 and shown in **Figure 5.3**.

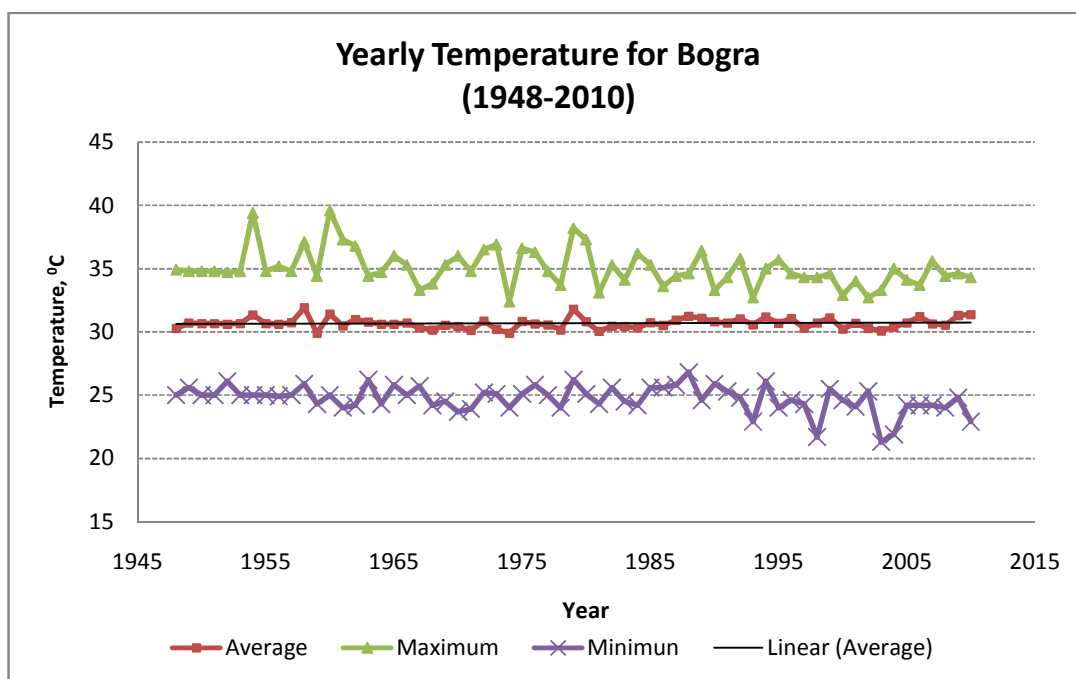


Figure 5.3: Yearly Average Temperature in Project Area

Source: Bangladesh Meteorological Department (BMD)

5.2.2. Precipitation

The northwest region of Bangladesh can be considered as the driest region of Bangladesh. Average annual rainfall in this region is around 1900 mm is below the average of Bangladesh, which is around 2300 mm.

Mean annual rainfall in the project area (represented by Bogra station) is approximately 1705 mm/year. **Figure 5.4** shows the average monthly rainfall for 1950-2010 recorded from Bogra station. Almost 74 percent of rainfall occurs from June to September and little or no rainfall from November to February. During pre-monsoon (March-May) cumulative rainfall is 276mm, in monsoon (June-September) total rainfall is 1267 mm and; post monsoon and dry season contributes 187mm rainfall. The maximum recorded monthly rainfall was 371 mm/ month.

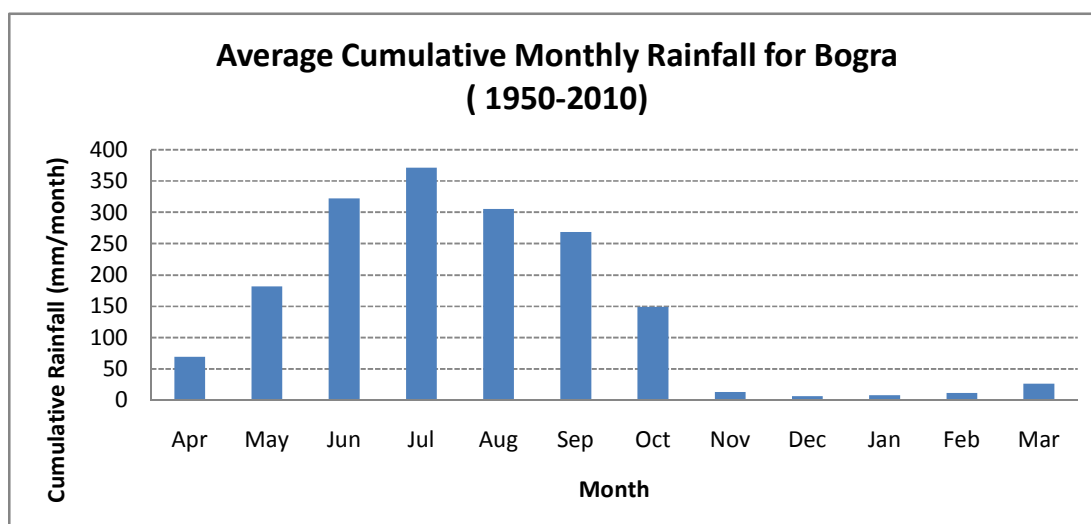


Figure 5.4: Average Monthly Rainfall for Bogra

Source: Bangladesh Meteorological Department (BMD)

5.2.3. Wind Speed

Figure 5.5 shows the average monthly wind speed at Bogra station. The highest value occurs in April and the lowest in November.

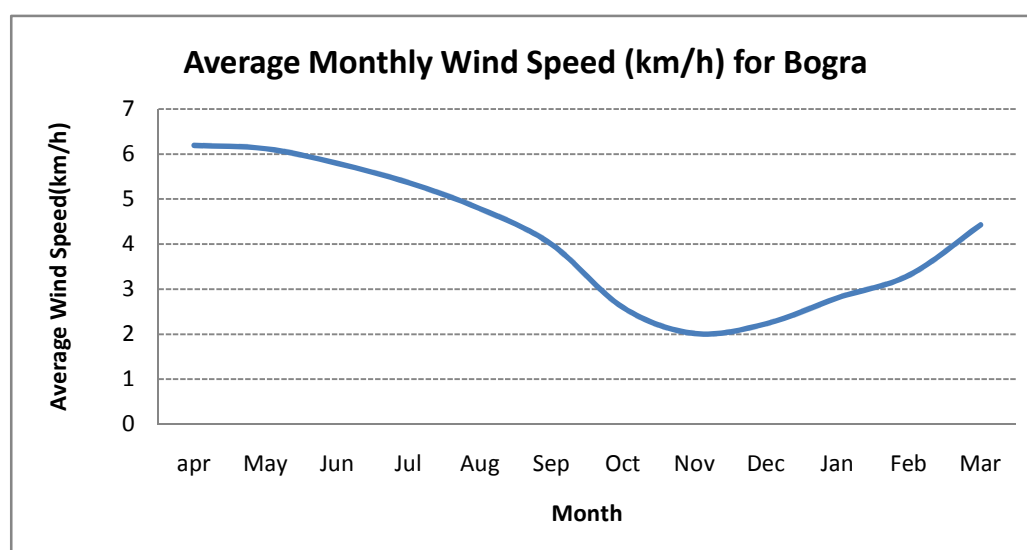


Figure 5.5: Average Monthly Wind Speed in Bogra

Source: Bangladesh Meteorological Department (BMD)

5.2.4. Humidity

Humidity data was also collected from BMD for Bogra station for the period 1950-2010. The relative humidity is highest during monsoon at 86.3 percent in July. **Figure 5.6** shows the relative humidity for Bogra station.

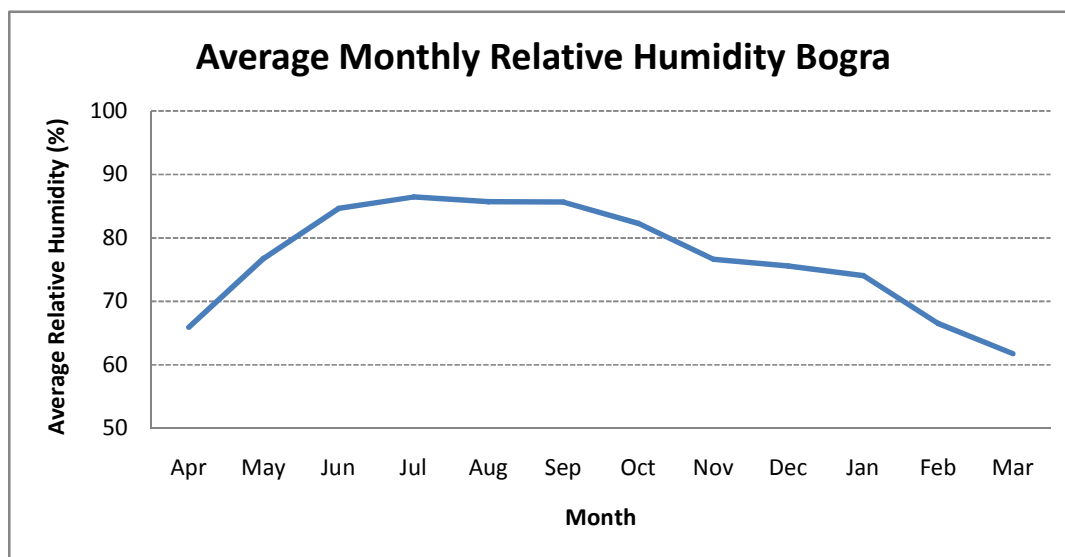


Figure 5.6: Average Monthly Relative Humidity in Bogra

Source: Bangladesh Meteorological Department (BMD)

5.3. Topography

Topographically, this area is flat and before construction of the BRE, the area was exposed to flooding from the Jamuna River during the monsoon season. **Figure 5.7** shows the study area topography as rendered by a digital elevation model. Land elevation varies from 21m to 4.7m amsl but most of the area is within 8-16 m. The area slopes gently downward from north to south and towards the east. The highest part is situated in the northern portion (Shaghata, Jhumabari, parts of Gaibandha) and the lower elevation area is in the southern portion (Sirajganj).

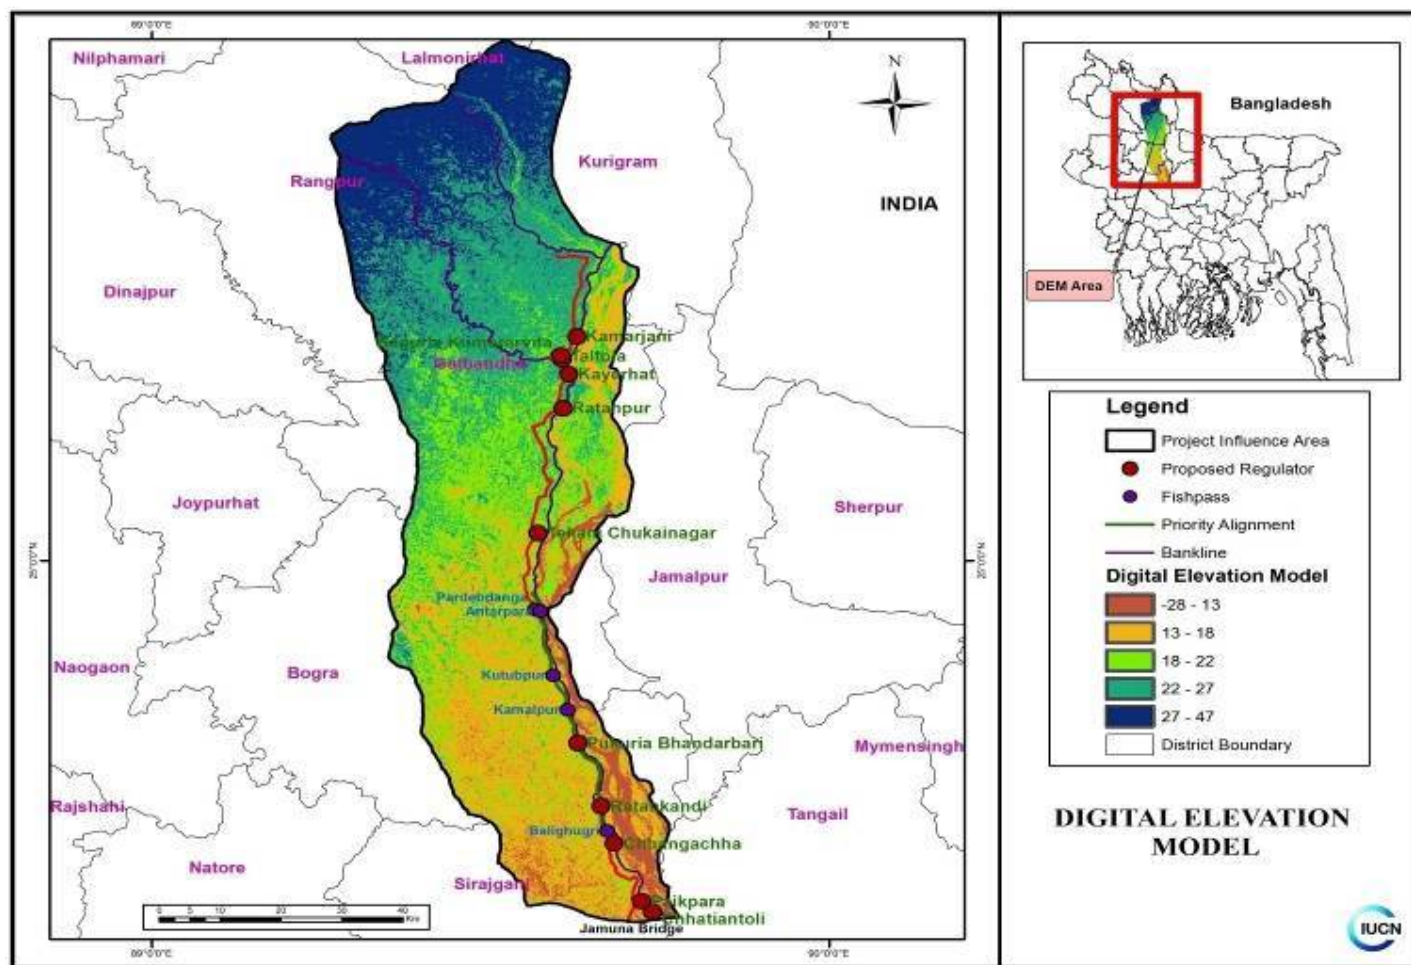


Figure 5.7: Digital Elevation Model (DEM) of the Project Area (Only priority reach to be shown)

5.3.1. Floodplains

The lands of the project are a part of the Karotoya-Bangali and the Active Brahmaputra-Jamuna flood plain (Asiatic Society, 2006). The eastern part of the area has broad floodplain ridges and almost level basins. While the land adjacent to Jamuna river and the chars comprise of a belt of unstable alluvial land constantly being formed and eroded by shifting river channels. It has an irregular relief of broad and narrow ridges and depressions. About 53 percent of the total project influence area (PIA is 268,466 ha) is available for agriculture. The rest of the land is occupied by settlement, homestead forestry, bamboo plantations and chars and water bodies.

5.3.2. Charland

Char or shoal is an important feature of a braided river like the Jamuna. Analysis of time series satellite images of 1973 to 2014 show that over 90 percent of the area within the riverbanks of the Jamuna has been char at one time during the 27-year period. Chars are variable in time and space in terms of their geographic location. They survive through the constant interplay of erosion and accretion. The same analysis shows that about 75 percent of the chars remained between one and nine years, while only about 10 percent lasted for 18 years or more (Asiatic Society, 2006). It is important to note that as far as duration of existence is concerned, there are mainly three types of chars: dead, mature, and running or existing chars. The dead chars are usually permanent land formations; mature chars have not faced any major change for 10-15 years and existing or running chars face regular changes due to the action of the river and continuously emerge and submerge. The emergence and erosion determines the intensity of vulnerability in the 'chars'. Typically a new char land requires at least 10 years of continuous survival before it becomes habitable for human being.

Field investigations during 1-15 September 2014 have identified 159 chars of various sizes. Of these, 68 chars exist in the priority area from Sirajganj to Sariakandi. The names of the nearest inhabited chars to the right bank are given in **Table 5.4**.

Table 5.4: Chars/ Shoals in the Project Area

District	Sub-District (Upazila)	Name of Chars
Sirajganj	Sirajganj Sadar	Simla, Kharoya, Khas Para, Par Simla, Noya Para, Dumber Char, Jhumkal Char
Bogra	Dhunat	Maiz Bari, Vanger Bari, New Sariakandi, Pukuria, Boroikandi, Baniajan, Atai, Koiya Gari, Sohora, Boishaki, Adhanagor, Fuljhur, Mollik Para, Shree Pur, Dhakuria, Boyan Char, Majhira, Shanbandha, Promitibari, Agura Maizbari
	Sariakandi	Kuripara, Khapur Para, Antarpara, Kazla, Ghager Char, Diga Para, Chokorthinatha, Konnobari, Kormoja, Housherpur, Sujatpur, Bauliapara, Banupur, Dhorbon, Pakuriachar, Jamtoil, Manik, Nobboi, Barabajbari, Chanpara, Hasnapara, Dakat Mara, Joyantirpara, Nolcia, Fazilpur, Gobindapur

District	Sub-District (Upazila)	Name of Chars
	Kazipur	Saouthtola, Manikpotol, Fultola, Shimultola, Polashpur, Char Kazipur, Masuakandi, Maijbari Fulchar, Bhurungi
	Sonatola	Khabilla, Patil Char, Shollia, Auchar, Boro Vanga

5.4. Hydrology and Floods

5.4.1. Other Surface Water Resources

The influence area of the project is dominated by the Jamuna river and also the Bengali, Ichamati and Hurasagar rivers to a lesser extent in the eastern part of the area. All these rivers are interconnected by numerous channels (khals), tributaries and distributaries forming a hydrological network in the entire northwest region. For example, Mahananda, Punorbhaba which are major rivers of the northwest region, are connected to the Atrai-Karatoya-Bengali system which drains to the lower Jamuna through the Hurasagar/Baral in the south east corner of the region. Surface water bodies are shown in **Figure 5.8**.

At the northern boundary of the project area is the Teesta, which is a major tributary of the Brahmaputra. The braided Teesta River is the largest fan river in Bangladesh originating in Sikkim, India and avulsed into its present course at the end of the 18th century. Before avulsing, the Teesta flowed through today's Atrai as one of three channels, draining the western areas of Bangladesh into the Ganges.

Other types of surface water resources include beels, wetlands and natural canals or khals. These were identified from field investigations and images downloaded from Google Earth. **Table 5.5** shows the distribution of surface water bodies in the project area.

Table 5.5: Area of rivers in the project area

Upazila Name	River Name	Area (Hectares)
Sirajganj sadar, Sherpur, Sariakandi, Roygang, Kazipur, Gabtali, Dhunat, Bogra Sadar	Jamuna	10676.501
	Karataya	838.530
	Hurasagar	39.171
	Ichamati	86.542
	Bangali	868.671
Grand Total		12652.911

Field investigations show that there are around 12 khals in the project area. The average water level of the khals during monsoon varies from 3m to 4.5m and width of the khals varies between 20m to 35m. According to local informants many of these khals become

disconnected at places in the dry season. The river and khal network is shown in **Figure 5.8** and names given in **Table 5.6**

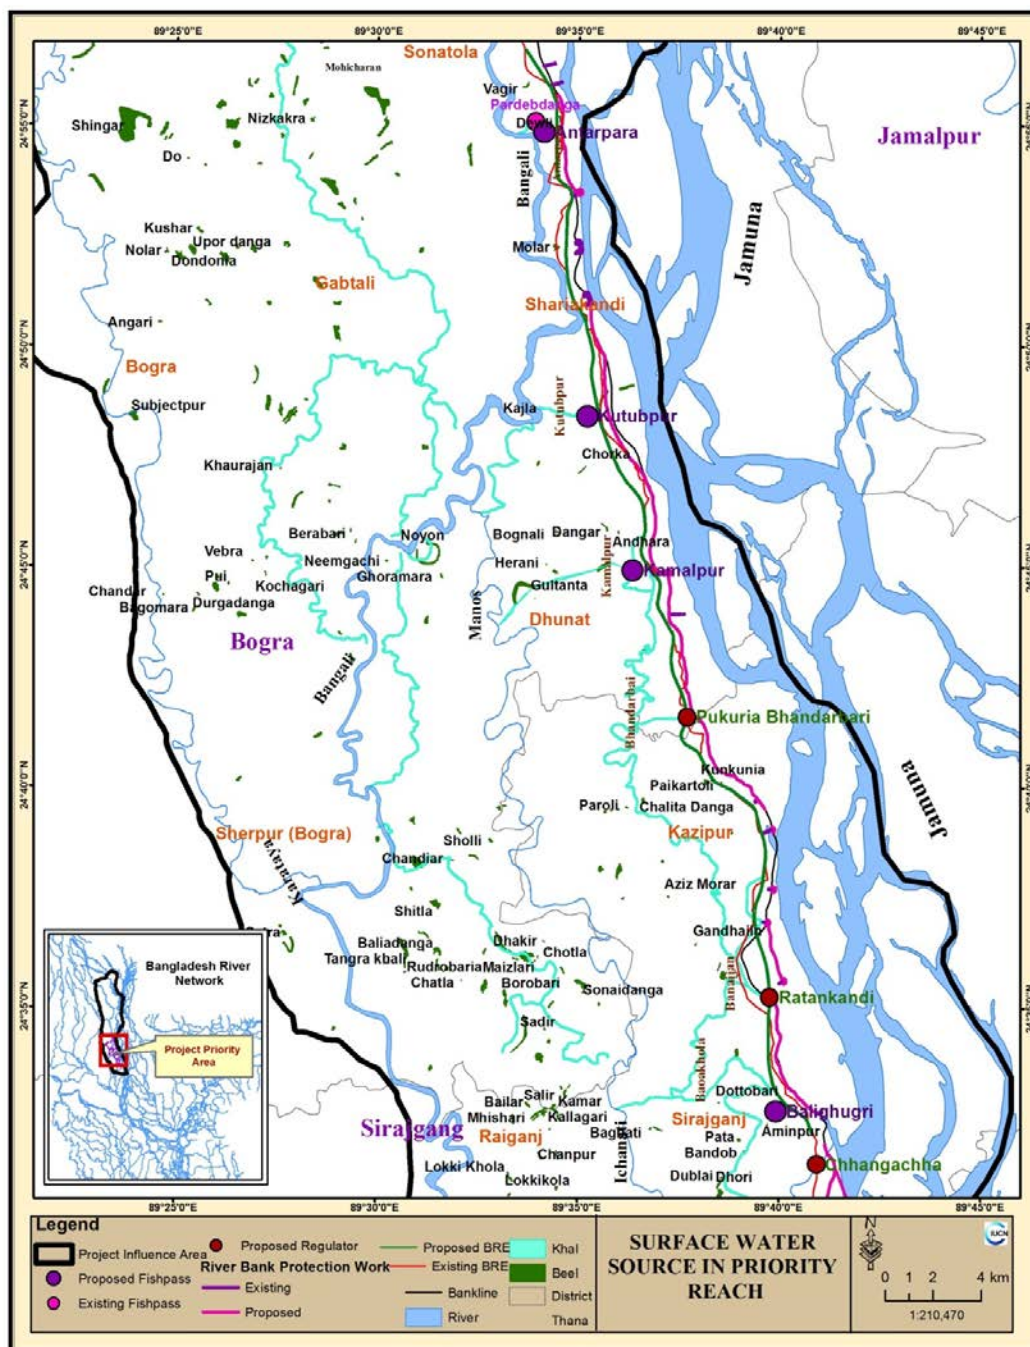


Figure 5.8: Rivers and Khals of the Project Area

Table 5.6: Khals of the project area

District	Upazila	Name of Canal/Khal
Sirajganj	Sadar	WAPDA Khal, Bahukakhal, Baliaghugri khal, Doi Vanger khal
	Kazipur	Halotkhal, Meghaikhal
Bogra	Dhunat	Shimulbari khal, Madhob Danga
	Sariakandi	Kata khal, Kuripara canal, Shalukar canal, Char bati canal

5.4.2. Jamuna Tributaries

River flow data for major tributaries of Jamuna in the project area such as Teesta, Bengali at Khanpur and Hurasagar at Baghabari has been collected from Bangladesh Water Development Board and analyzed to describe the baseline situation.

5.4.2.1. Teesta River

The average maximum discharge of Teesta has not changed over time with the highest recorded peak reaching 8,710 m³/s in 1987, while the dry season flow has drastically reduced as result of barrage operations. Two barrages regulate the dry season flow, one since 1985 in India and another since 1990 in Bangladesh and result in increasing sediment load due to the extraction of water for irrigation purposes. The river reacts somewhat flashy to high local rainfalls during the monsoon season. Data given in **Figures 5.9** and **5.10** show that the maximum monthly average discharge of the Teesta for 1973-1985 was 2,459 m³/s and for 2000-2009 maximum average discharge was 1,499 m³/s. The reduced discharge can be attributed to barrages on the Teesta at Gojoldoba in West Bengal, India and at Dalia in Bangladesh. The maximum average water level is 28.6m PWD.

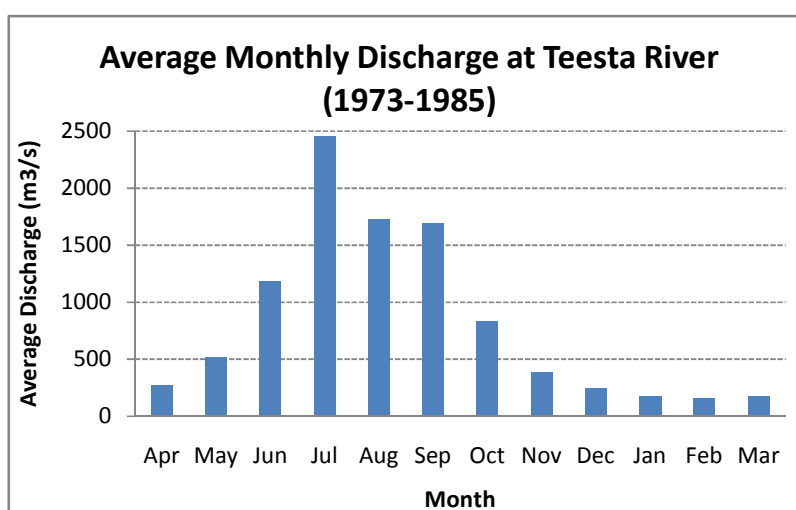


Figure 5.9: Average Monthly Discharge of the Teesta River (Source: BWDB)

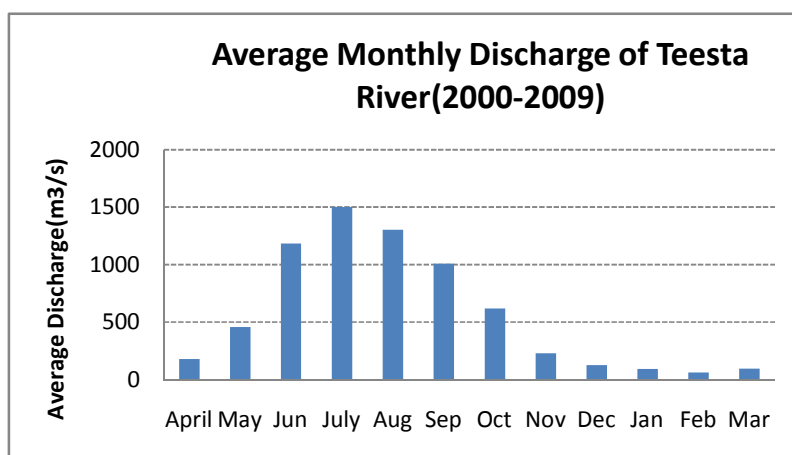


Figure 5.10: Average Monthly Discharge of the Teesta River (Source: BWDB)

5.4.2.2. Bangali River

Discharge data at Khanpur station for the period 1985-2007 show that the maximum monthly average discharge of the Bengali river is 350 m³/s and the river peaks in July. In the dry season especially in the beginning of April the flow reduces drastically. The maximum monthly average water level is 12m (PWD). **Figure 5.11** shows the average discharge of the Bengali River.

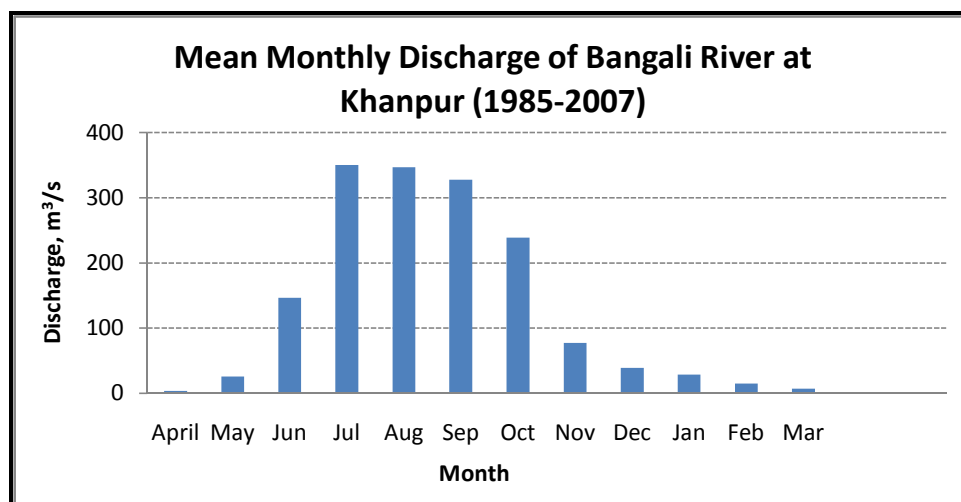


Figure 5.11: Average Monthly Discharge of the Bengali River (Source: BWDB)

5.4.2.3. Hurasagar River

Discharge data at Baghabari station for the period 2000-2006 show that the maximum monthly average discharge of the Hurasagar river is 284.4 m³/s and the river peaks in September. In the dry season especially in the beginning of April the flow reduces drastically. The maximum monthly average water level is 6.3m (PWD). **Figure 5.12** shows the average discharge of the Hurasagar River.

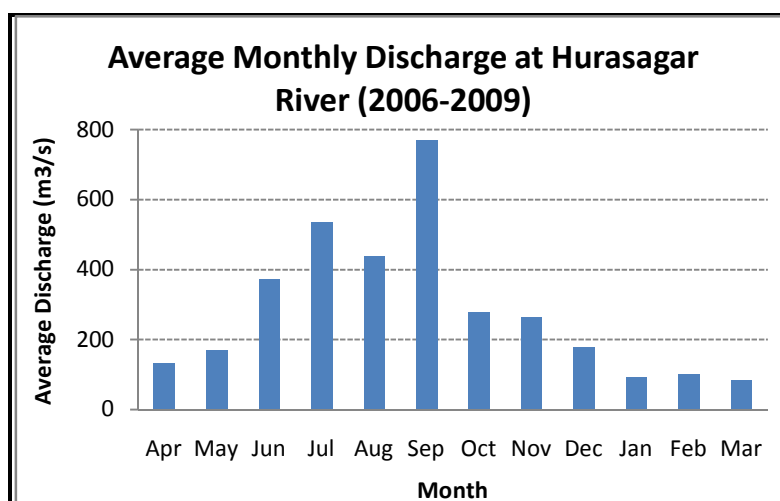


Figure 5.12: Average Monthly Discharge of the Hurasagar River Source: (BWDB)

5.4.3. Floods

Each year in Bangladesh about 26,000 sq. km, that is around 18 percent of the country is flooded (Nandan, 2014). In fact, the Bengali language distinguishes between the normal floods of the rainy season, which are locally known as barsha, and the more harmful floods of abnormal depth and timing, which are termed bonna (Nishat et al, 2011). During severe floods, the affected area may exceed to 55 percent of the total area of the country. In the event of catastrophic floods, it has been anticipated that about two-thirds of the country can get affected (Ahmad et al., 2000).

The hydrology and inundation cycles of almost 40 percent of the flood plains in Bangladesh are influenced by the Jamuna. As a result, the major floods that have occurred over the years can be linked to high water levels in the river. **Table 5.7** gives a picture of the extreme flood events that have occurred in recent years and **Table 5.8** extent of flooding of some years for the Jamuna.

Table 5.7: Some Notable Flood Disasters of Bangladesh

Event	Impact
1954 Floods	Affected 55% of the country.
1974 Floods	Moderately severe, over 2000 deaths, affected 58% of country, followed by famine with over 30000 deaths.
1984 Floods	Inundated 52520 km ² , damage estimated at US\$ 378 million.
1987 Floods	Inundated over 50000 km ² , estimated damage US\$ 1.0 billion, 2055 deaths.
1988 Floods	Inundated 61% of country, estimated damage US\$ 1.2 billion, more than 45 million homeless, between 2000-6500 deaths.
1998 Floods	1100 deaths inundated nearly 100000 km ² , rendered 30 million people homeless, damaged 500000 homes, heavy loss to infrastructure, estimated damage US\$ 2.8 billion.
2004 Floods	Inundation 38%, damage US\$ 6.6 billion, deaths 700, affected people nearly 3.8 million.

(Source: Hossain, 2006)

Table 5.8: Comparison of Major Flood Impacts in the Jamuna

Year	Flood Duration (Days)	Flooded Area(km ²)	Flood Level (m)
1988	27	89,970	-
1998	66	100,250	20.37 m
2004 (up to 31 July, 2004)	16	56,000	20.18m

The 1998 flood has the highest published discharge (103,129 m³/s) on the Jamuna River, at Bahadurabad, followed by the flood in 1988 (98,300 m³/s). However, the 1998 peak water level at Bahadurabad was lower than in 1988. Both floods have shown extensive inundation of the region. For the Bangali river, the highest discharge (915 m³/s) and water level (14.66m PWD) were also measured in 1998. The highest water level in the Hurasagar river is recorded at 12.55m PWD in 2012. The highest water level of the Jamuna river at Sirajganj corresponding to 100 year flood is 15.5 mPWD based on historic flow.

However, flood damage is mostly related to the accidental breaches that occur in the flood embankments along the Jamuna, rather than the severity of the flood event. Since, flood embankments (BRE) along the Jamuna has been designed to protect the project area from normal as well as extreme floods, flooding in the flood protected areas is primarily due to breaches in the embankments along the Jamuna which dominates the inundation cycle of the area.

The Bengali-Ichamati-Hurasagar rivers are meandering rivers and have very limited capacity to drain out the flood discharge during the times of peak flows. Again, the water levels of the Jamuna are much higher than the internal rivers. Combination of both these factors causes flooding and drainage congestion in the Bengali-Atrai-Hurasagar rivers, especially the lower reaches. Even in dry years, large areas of land are inundated from rainfall and river flooding.

5.4.4. Navigation in River and Khals

The Jamuna river is categorized as Class II¹³ by Bangladesh Inland Water Authority (BIWTA, 1991), which means the river remains navigable throughout the whole year and links major inland ports or places of economic importance to Class-I routes. **Figure 5.13** shows the available average draft in the Jamuna is 1.75m across the river and recent surveys show the minimum available water depth in the river from Sirajganj to Bahadurabad is 1m to 1.3m and from Bahadurabad to Chilmari is a 1.2m to 2.2m (Mishra and Hussain, 2012). The river is also a part of the India-Bangladesh protocol route and the route is used by cargo vessels to carry goods to Pandu in India. At the local level, people from charlands use the river to access the mainland mainly for earning livelihood, education and healthcare purposes. Smaller mechanized boats are used mainly for carrying people and goods and also for fishing activities.

Bengali River and Ichamoti River are comparatively small river navigation activities are less than that of the Jamuna river. The internal lakes/khals like Banaijan khal, Baoikhola Khal, Shimulbari khal, katakhal, Wapda Khal of the project area are suitable for the

¹³The navigable waterways are assigned to four Classes that define the level of service to be guaranteed taking into account the economic importance of the river as well as the technical and financial capacity to maintain the level of service.

movement of mostly small non-motorized boats only. The depth is around 3m to 3.2m in monsoon drying up to less than 1m and becoming unnavigable in dry season.

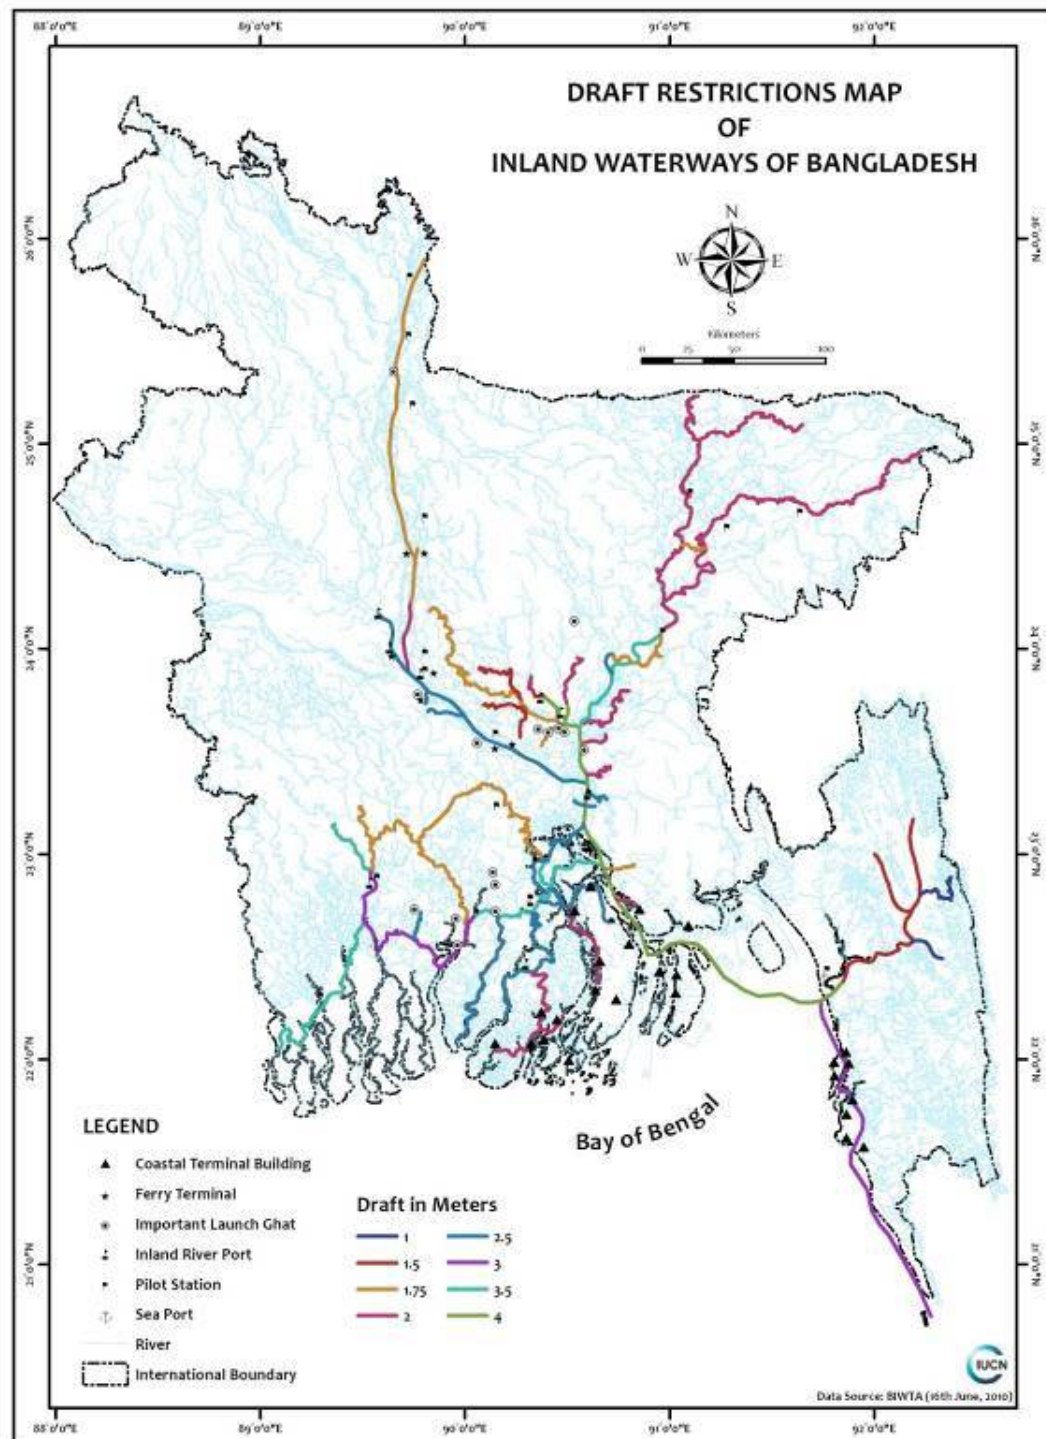


Figure 5.13: Draft Restriction of Inland Waterways of Bangladesh

5.4.5. Erosion and Sediment Loading

The banks and the charlands of the Jamuna river are highly susceptible to erosion and erosion processes are complex, with the magnitude and rate of erosion varying temporally and spatially.

Studies show erosion along the right and left bank have caused the river to widen at most places (Sarker, 2009). This is due to the Great Assam Earthquake in 1950. In Assam, India it widened along its 650km length from an average 6 to 9km and along its 250km in Bangladesh from 8 to 12km. The associated riverbank erosion is on average around 2 km at each bank. In other rivers, for examples in the Teesta, since the early 2000s very low overall erosion rates are recorded.

Long-term pattern of bank erosion along the entire Jamuna River over the period 1973 to 2012 show that the greatest erosion on the right bank of the river has occurred between approximately Sirajganj and Mathurapara. This corresponds to the RBIP's priority reach for rehabilitation and upgrading of the BRE. The annual erosion rate increases with the annual maximum flood discharge (CEGIS, 2009), although the rate of erosion along the left bank is more sensitive to the annual maximum discharge than along the right bank due to morphological characteristics of the river. **Figure 5.14** shows the pattern of bank erosion and channel width changes using digitized banklines compiled from satellite imagery. The digitized data sets extend over a distance of 85 km upstream of Jamuna Bridge and show bank positions at 500 m intervals along both the left and right banks of the river.

Sedimentation is also a problem in the project area. The Brahmaputra-Jamuna system is one of the most heavily sediment-laden large rivers of the world and a large part of this sediment is deposited in the flood plains. A part of this sediment is fine sand which is heavier than clay and silt and is deposited on the river bank as the flood waters recede, renders the land uncultivable. On the other hand, fertility of cropland will increase when nutrient rich silt and clay particles from river water are deposited on flood plains. The khal system is also choked with very fine sediments, especially when there is not enough discharge to remove the deposits and causes the bed level to rise and reduces their conveyance capacity

From Assam (India), the Brahmaputra carries a huge load of sediment acquired from the rain-soaked Himalayan tributaries. In fact, with a suspended sediment load of 13 million tonnes per day during the flood season, the river is considered to be one of the most heavily sediment-laden large rivers of the world (Nishat, 2014). The typical bed material of the Jamuna River is fine sand. Most of the bed material transport occurs in suspension mode. Analysis of bed material load as measured by the BWDB from 1966 to 1989 showed that the sediment load in the Jamuna River had reduced more substantially during the 1980s than in the late 1960s (Delft Hydraulic and DHI, 1996c. Sarker and Thorne (2006) related the change in bed material load in the Jamuna River to the propagation of sediment wave through the Brahmaputra-Jamuna-Padma-Lower Meghna River system due to the huge landslides in the Himalayas caused by the Great Assam Earthquake of 1950.

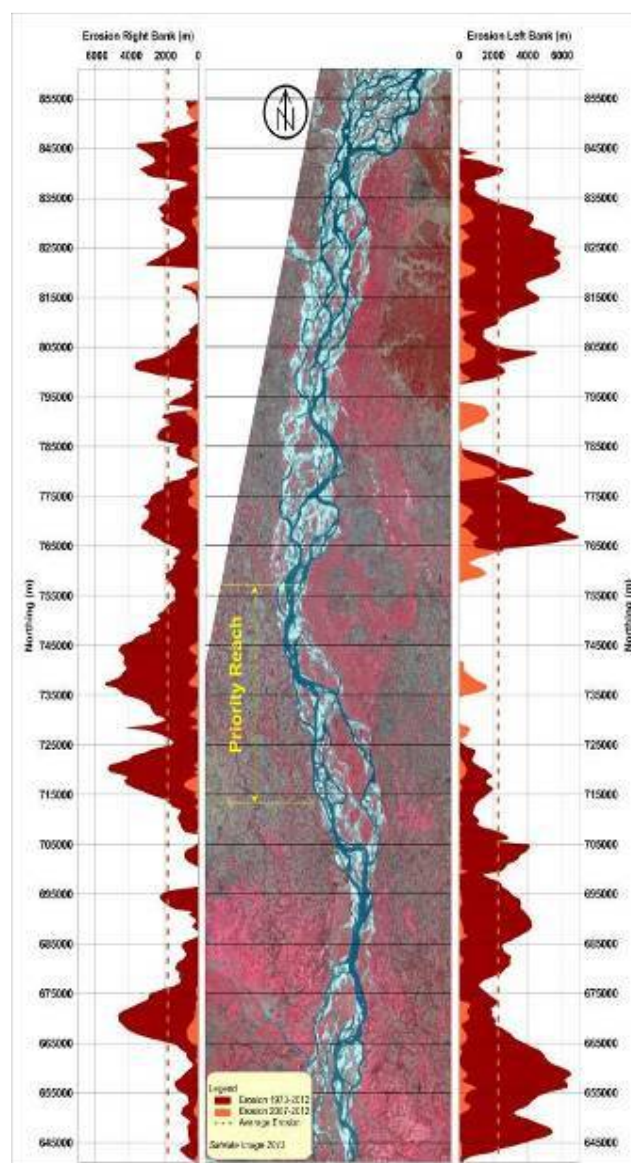


Figure 5.14: Pattern of bank erosion on Jamuna River, 1973 to 2013 (Source: Fichtner, 2014)

5.5. Geology and Hydrogeology

5.5.1. Soils

The soils in this region are usually grey silt loams and silty clay loams on ridges and grey or dark grey clays in basins. Sample collections from project area show that in Sirajganj, along the bank soil consists of alluvial deposit of non-cohesive materials of loose to medium dense silty fine sand mixed with trace amount of mica up to the depth of 20 m from the existing ground level. In Bogra and Gaibandha up to Teesta river the upper deposits consist of loose to medium dense non-cohesive materials of fine sand mixed with varying amount of silt and mica. The soils in the bore holes collected from embankment and road consists of non-cohesive and cohesive deposits of fine sand and clayey silt

mixed with trace amount of mica. The drainage qualities of the soils at upper region are low to medium in non-cohesive materials and very poor to poor in cohesive deposits.

5.5.2. Geology

The project study area is situated in the Brahmaputra-Jamuna basin, that is the geology is dominated by quaternary sediments deposited by the Ganges-Padma and Brahmaputra-Jamuna-Teesta and their numerous tributaries and distributaries. The area is underlain by Tertiary and Quaternary sediments and recent alluvial deposits originating in the foothills of the Himalaya. The stratification of the sediments is generally composed of non-cohesive materials of sand and silt with patched of cohesive deposit of clay.

Bangladesh is situated in a seismically active region of the world. The seismic zoning map of Bangladesh proposed by Geological Survey of Bangladesh (GSB) and incorporated in the Bangladesh National Building Code the project area lies within Zone I which corresponds to high risk to earthquakes (BNBC, 2006).

5.5.3. Groundwater

The groundwater level varies across the year. Data for Bogra station shows that during October the groundwater level is at its highest at 3.8 m below existing ground level and lowest in April at 7m below existing ground level. However, water levels at Sirajganj and Gaibandha are slightly higher with highest water levels at 1.67 and 1.2 respectively. **Figure 5.15** compares the groundwater levels for Bogra, Sirajganj and Gaibandha stations.

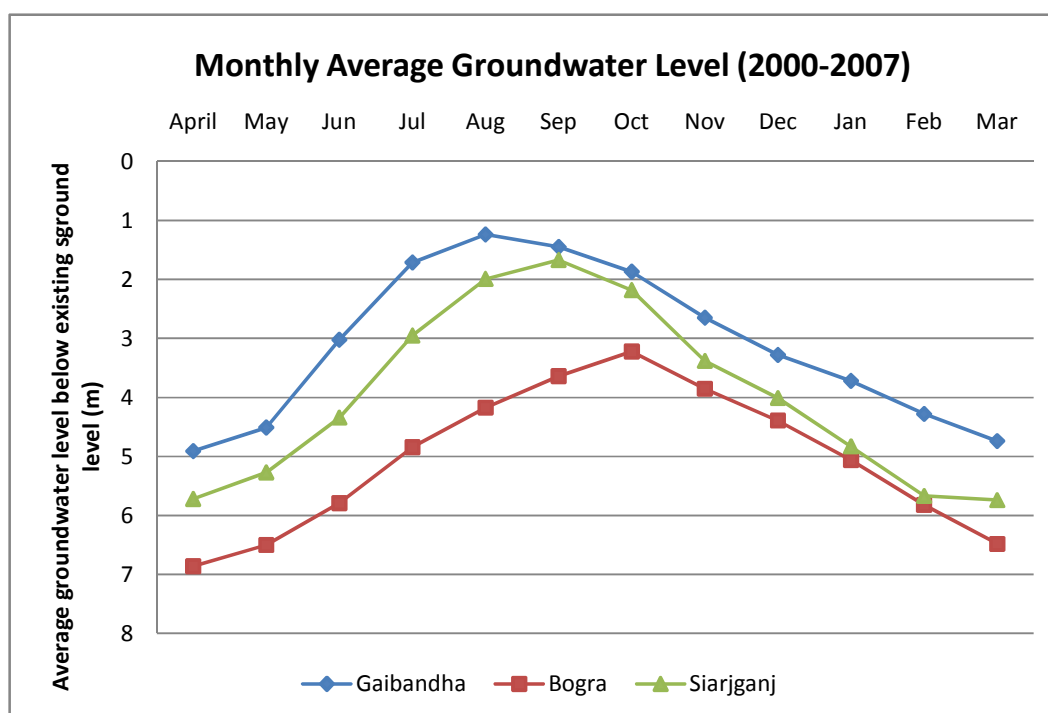


Figure 5.15: Monthly Average Groundwater Level at Gaibandha, Bogra and Sirajganj (Source: BWDB)

5.5.4. Landuse and Land Cover Analysis

Land use maps were generated based on analysis of satellite images of April, 2014 and verified through field investigation during September 2014. Details of present land use / land cover of the area are illustrated in **Table 5.9** and **Figure 5.14**.

Table 5.9: General Land Use in Project Area (To be confirmed whether for Priority Reach)

Category	Area (Hectares (tbc))	Percentage
Sandbar/Char	29,021.59	10.81
Water body	20,190.16	7.52
Agriculture and Vegetation	142,496.00	53.01
Settlement	76,758.00	28.59
Total	268,465.75	100.00

The distribution of land types for agriculture is shown in **Table 5.10**. This land type classification is based on depth of inundation during monsoon season due to normal flooding on agriculture land. There are five land types: High Land (HL, flooding: depth 0-30 cm); Medium Highland (MHL, flooding depth: 30-90 cm); Medium Lowland (MLL, flooding depth: 90-180 cm); Low Land (LL, flooding depth: 180-360 cm); and Very Lowland (VLL, flooding depth: above 360 cm) (MPO, 1986).

Table 5.10: Land Types in project area

Location	Cultivable land (%)	Land type by flood water level (area in %)					Total
		High land	Medium High land	Medium Low land	Low land	Water body	
Sirajganj	67	28	41	25	3	3	100
Bogra	70	25	51	16	6	3	100

Source: Upazila Agricultural Officer, DAE

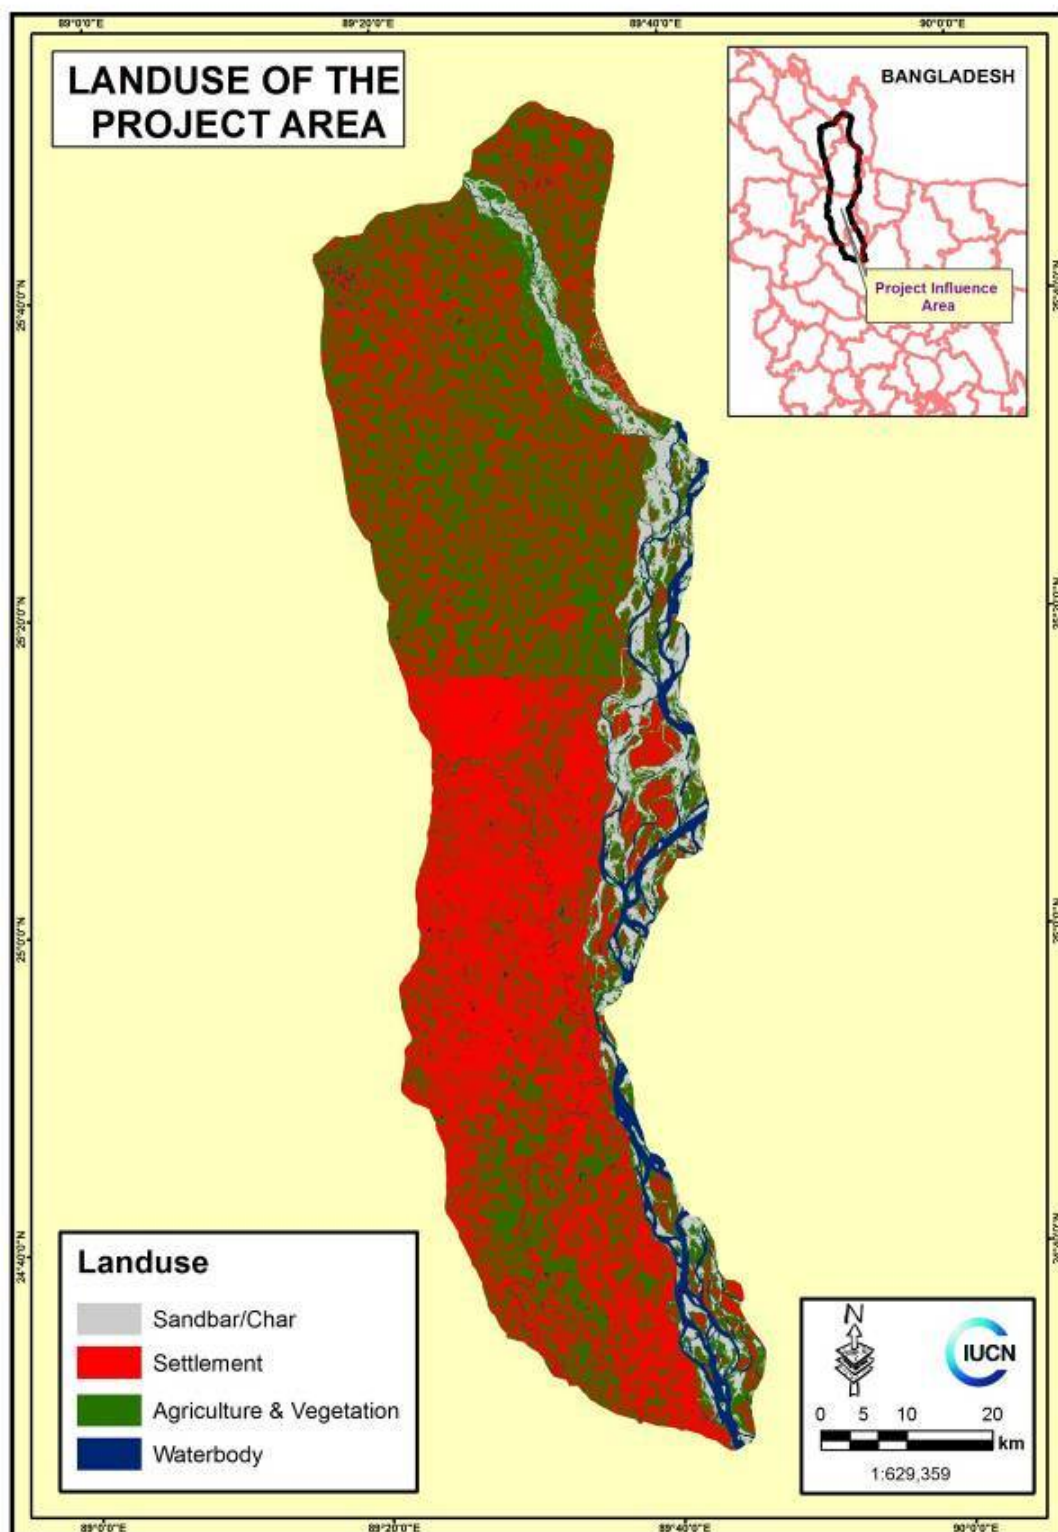


Figure 5.16: Land Use in the Project Influence Area (Needs to be improved; show Priority Reach Only)

5.6. Quality of Environment

In order to understand the quality environment primary and secondary data and information has been used. The primary investigation includes assessment of air quality and noise; and sampling of surface water, groundwater and soil which were later tested in laboratories for certain parameters.

5.6.1. Ambient Air Quality in the Project Area

Air quality of an area impacts human health, especially sensitive populations such as children, the elderly, and individuals suffering from respiratory diseases. There are no major industries in the project area. Taking this into account, the key air quality parameters (suspended particulate matter -SPM, oxides of sulfur - SO_x, and oxides of nitrogen - NO_x) were analyzed from samples collected over an 8 hour period at each sampling site. Test results (**Table 5.11**) show the parameters are within the standard values set by Ministry of Environment and Forests for five of the locations. However, SPM measured at Jumarbari, Saghata, Gaibandha and Sariakandi Hard Point, Bogra exceeds the national standards and WBG EHS standards (**Tables 5.12 and 5.13**).

Table 5.11: Ambient Air Quality Parameters in Project Area

Sampling Location*	Classification of the Area	Suspended Particulate Matter (µg/m ³)	Sulfur Dioxide (µg/m ³)	Nitrogen Oxides (µg/m ³)
Jumarbari, Saghata, Gaibandha	Commercial and mixed	811	Not detected	8.39
Bharatkhal, Saghata, Gaibandha	Residential and rural	260	Not detected	6.54
Baoitara, Saidabad, Sirajganj	Commercial and mixed	593	Not detected	11.90
Ratankandi, Ratankandi, Sirajganj	Commercial and mixed	298	Not detected	7.14
Singrabari, Kajipur, Sirajganj	Residential and rural	261	Not detected	6.35
Sariakandi Hard Point, Sariakandi, Bogra	Commercial and mixed	1,188	Not detected	10.56
Anantapur, Ulipur, Kurigram	Commercial and mixed	375	Not detected	7.56

Source: IUCN Field survey, 4-10 November 2014

Table 5.12: Bangladesh Standards for Ambient Air Quality

Category	Area	Suspended Particulate Matter	Sulfur Dioxide	Nitrogen Oxides
		(µg/m ³)		
Ka	Industrial and mixed	500	120	100
Kha	Commercial and mixed	400	100	100
Ga	Residential and rural	200	80	80
Gha	Sensitive	100	30	30

Note: The averaging period is counted as per 8-hour

Source: Schedule-2, Rule 12, Environment Conservation Rules of 1997 (Page 3123, Bangladesh Gazette, 28 August 1997. Translated from Bengali.

Notes:

1. Sensitive area includes national monuments, health resorts, hospitals, archaeological sites, educational institutions
2. Any industrial unit located not at a designated industrial area will not discharge such pollutants, which may contribute to exceed the ambient air quality above in the surrounding areas of category 'Ga' and 'Gha'.
3. Suspended particulate matters mean airborne particles of diameter of 10 micron or less.

Table 5.13: Ambient Air Quality (WBG EHS Standards)

Averaging period	Suspended Particulate Matter	Sulfur Dioxide	Nitrogen Oxides
	(µg/m ³)		
24 hrs	50	500	200

Source: World Bank Group Environmental, Health, and Safety (EHS) Guidelines

5.6.2. Sources of Pollution

The main sources of pollution in Jumarbari (market place), Saghata, Gaibandha and Sariakandi, Bogra include the local vehicles especially trucks, *karimons* and *nasimons* (locally manufactured small three-wheelers). In Jhumerbari, the location of air quality measurement is near union parishad which is situated in Bazar. Surrounding area is an overcrowded place extensive dust emission. The measurement was done in the evening when the market started and people began to gather.

In Sariakandi Hardpoint, the measurement was taken at the stopping point of *nasimons*; in addition, various types of motor boats and launches were also sailing in the river – causing air quality deterioration.

5.7. Ambient Noise Levels in Project Area

Vehicular traffic on road is the key source of noise in the study area. Measurements were taken in seven locations and are shown in **Table 5.14**. The measured noise values are within the prevailing standards set by DoE and WB (**Tables 5.15** and **5.16**).

Table 5.14: Noise Levels in Project Area

Sampling Location	Category of the area	Date	Noise(dBA) (Day)	Noise(dBA) (Night)
Jumarbari, Saghata, Gaibandha	Commercial and mixed	04/11/14	34-36	30-32
Bharatkali, Saghata, Gaibandha	Residential and rural	04/11/14	34-38	31-33
Baoitara, Saidabad, Sirajganj	Commercial and mixed	07/11/14	36-38	32-34
Ratankandi, Ratankandi, Sirajganj	Commercial and mixed	07/11/14	34-36	30-32
Singrabari, Kajipur, Sirajganj	Residential and rural	08/11/14	36-38	31-34
SariakandiHP, Sariakandi, Bogra	Commercial and mixed	09/11/14	46-51	46-48
Anantapur, Ulipur, Kurigram	Commercial and mixed	10/11/14	34-37	30-33

Source: IUCN Field survey, 4-10 November 2014

Table 5.15: Noise Quality Standards of Bangladesh

	Area Category	Standard Values (dBA)	
		Day	Night
Ka	Silent Zone	45	35
Kha	Residential area	50	40
Ga	Mixed area (basically residential and together used for commercial and industrial purposes)	60	50
Gha	Commercial area	70	60
Umma	Industrial area	75	70

Source: Schedule 4, Rule-12, Environment Conservation Rules, 1997 (Page 3127, Bangladesh Gazette, 28 August 1997, trans. from original Bengali).

Notes:

1. Daytime is considered as the time between 6 am to 9 pm.
2. Nighttime is considered as the time between 9 pm to 6 am.
3. Silent zones are areas up to a radius of 100 m around hospitals, educational institutes, and Government-declared special establishments. Use of vehicular horns, other signals, and loudspeakers are prohibited in silent zones.

Table 5.16: World Bank Group EHS Standards for Noise

Area Category	Standard Values (dBA)	
	Day (07:00-22:00)	Night (22:00-07:00)
Residential, institutional, educational area	55	45
Commercial and industrial area	70	70

Source: World Bank Group Environmental, Health, and Safety (EHS) Guidelines

5.8. Surface Water Quality

The surface water quality in the project area is influenced by the hydrological and water quality conditions of Jamunariver and upstream rivers such as Teesta, Karotoya, Atrai. Data on water quality parameters were collected from primary and secondary sources and analyzed. Data for four surface water quality parameters was collected from BWDB stations at Bahadurabad for the Jamuna. The values of the parameters from BWDB and their standard values set by the DoE are shown in **Table 5.17** and **Table 5.18** respectively.

Table 5.17: Surface Water Quality of Rivers in Project Area (2006)

Station Name	Season	pH	DO (mg/l)	TDS (mg/l)	EC (μS/cm)
Teesta River					
Teesta Bridge	Wet Season	7.2	7.6	54	87
	Dry Season	7.0	6.0	50	75
Brahmaputra River					
Near Jamalpur	Wet Season	6.85	6.2		90
	Dry Season	7.1	5.0		110
Jamuna River					
Nandina	Wet Season	7.1	4.0		108
	Dry Season	7.7	3.5		150
Jamuna Bridge	Wet Season	7.7	6.2	48	87
	Dry Season	8.7	7.1	85	75
Jamuna Fertilizer	Wet Season	6.5	6.8		123
	Dry Season	7.12	5.5		256

Source: Bangladesh Water Development Board

Table 5.18: Bangladesh Water Quality Standards

	Best Practice based Classification	Parameters			
		pH	BOD (mg/l)	DO (mg/l)	Total coliform (number /100)
1	Source of drinking water for supply only after disinfecting	6.5–8.5	2 or less	6 or above	50 or less
2	Water usable for recreational activity	6.5 – 8.5	3 or less	5 or more	200 or less
3	Source of drinking water for supply after conventional	6.5 – 8.5	6 or less	6 or more	5000 or less

	Best Practice based Classification	Parameters			
		pH	BOD (mg/l)	DO (mg/l)	Total coliform (number /100)
	treatment				
4	Water usable by fisheries	6.5 – 8.5	6 or less	5 or more	-
5	Water usable by various process and cooling industries	6.5 – 8.5	10 or less	5 or more	5000 or less
6	Water usable for irrigation	6.5 – 8.5	10 or less	5 or more	1000 or less

Source: Environmental Conservation Rule (ECR)'97

Notes:

1. In water used for pisciculture, maximum limit of presence of ammonia as Nitrogen is 1.2 mg/l.
2. Electrical conductivity for irrigation water – 2250 μ mhos/cm (at a temperature of 25°C); Sodium less than 26 percent; boron less than 0.2 percent.

Table 5.19 presents the water quality measured during field investigations at selected locations of the project area. Surface water and ground water quality is represented by some selected parameters, which are crucial for drinking purpose, agricultural activities, industries and to maintain optimum aquatic environment. The standard values of these indicators set by the Department of Environment, Bangladesh are also shown for comparison purposes.

Table 5.19: Water Quality in Project Area

Sample Location	Water Quality Parameters					
	Temperature (°C)	TDS (ppm)	EC (μ S/cm)	BOD ₅ (mg/l)	DO (mg/l)	pH
Banaijan Khal, Kuralia, Ratankandi, Sadar, Sirajganj	27.4	262	526	12.6	4.27	7.25
Ichamoti river, Baliaghugri, Changacha, Sadar, Sirajganj	27.6	250	416	22.4	2.2	7.33
Deulibeel, Antarpara, Sariakandi Union, Sariakandi, Bogra	27.4	135	262	15.9	2.95	7.3
Bangali River, Pardevdanga, Kutubpur, Sariakandi, Bogra	27.5	62	105	4.25	6.25	7.32

Sample Location		Water Quality Parameters					
		Temperature (°C)	TDS (ppm)	EC (μS/cm)	BOD ₅ (mg/l)	DO (mg/l)	pH
Ghagot River, Pochakhuria, Gidari, Sadar, Gaibandha)		27.7	87.2	133	12.0	3.85	7.18
Standard Value (Bangladesh)	Irrigation	20-30	-	-	10 or less	5.0	7.0- 8.5
	Fishing	20-30	-	-	6 or less	4.0-6.0	6.7- 9.5

Source: IUCN field survey, 12 October 2014, period of analysis: 19/10/2013 to 03/11/2014 by Bangladesh Council of Scientific & Industrial Research (BCSIR).

5.8.1. Water Temperature

The temperature of water bodies affects fish habitats and their oxygen holding capacity. The mean temperature of the water bodies in the project area ranges from 27.4 to 27.7°C (Table 5.19) in October. This value lies within the DoE standards for both irrigation and fish habitats.

5.8.2. Taste and Odor

The taste and odor of water bodies have been found to be agreeable and unobjectionable.

5.8.3. pH

The hydrogen ion concentration of water is expressed by its pH value. A pH value of 7 indicates a neutral solution, neither alkaline nor acidic. In most of the water bodies of the area, the pH range is found well within the DoE standards.

5.8.4. Dissolved Oxygen (DO)

Dissolved oxygen is necessary to many forms of life including fish, invertebrates, bacteria and plants. Decrease in DO values below the critical level of 3 mg/l causes death of most fishes and other aerobic aquatic organisms. DO is relatively lower in the dry season than in the wet season. The values of DO of Bengali and Bangshi rivers in the project area (measured in the month of October) was within 4-6 mg/l, which complies with the DoE standards for irrigation as well as for fisheries and aquatic life. However, DO for water samples from Ichamatiriver, DeuliBeel and Ghaghot rivers are below the standard. In Ichamatiriver and DeuliBeel, the water level during sampling was very low and many habitats within the vicinity account for the low DO levels. Gaibandha city is located on the banks of the Ghaghotriver and untreated waste from this municipality is main reason for low DO levels.

5.8.5. Conductivity

Conductivity in streams and rivers is affected primarily by the geology of the area through which the water flows. Discharges to streams can change the conductivity depending on their make-up. A failing sewage system would raise the conductivity because of the presence of chloride, phosphate, and nitrate; an oil spill would lower the conductivity. EC as a water quality indicator is useful for estimating the amount of

minerals, assessing the effect of diverse ions on chemical equilibrium, physiological effects on plants or animals, and corrosion rates. It is an indirect measure of the TDS ($\text{TDS} = 640 \times \text{EC}$), the effects of which have been discussed above. The values of EC inside the polder ranged between 0.105mS/cm and 0.526mS/cm. The low values of EC indicate that the water bodies inside the project area are fresh water.

5.8.6. BOD₅

Biochemical oxygen demand (BOD) is the amount of dissolved oxygen needed by aerobic biological organisms in a body of water to break down organic material present in a given water sample at certain temperature over a specific time period. The term also refers to a chemical procedure for determining this amount. This is not a precise quantitative test, although it is widely used as an indication of the organic quality of water. The highest BOD₅ recorded in the samples is from Bangali river at 22mg/l and Deuli beel at 15.9mg/l and indicates moderate pollution. The rest of the samples are below 15mg/l.

5.8.7. Total Dissolved Solids (TDS)

Dissolved solids are also important to aquatic life by keeping cell density balanced. However water containing excessive dissolved solids adversely affects drinking water. Continuous use of such water may cause a general loss of condition, weakness, scouring, reduced production, bone degeneration and ultimately death. TDS may influence the toxicity of heavy metals and organic compounds for fish and other aquatic life. The natural range of TDS concentration in the water bodies of the project area are between 62 mg/l and 262 mg/l.

5.9. Groundwater Quality

The groundwater quality parameters, measured in the area during the month of September, were found to comply with the drinking water quality standards set by DOE. Tetric method was used to measure the water quality parameters for ground water. The ground water quality of the area is presented in **Table 5.20**.

Table 5.20: Groundwater quality in the Project Area

	Groundwater Quality Parameters				
	pH	Chloride (mg/l)	Iron (Fe) (mg/l)	Bicarbonate (mg/l)	TDS(mg/l)
Tube-well, 120 feet, Baliaghugri, Changacha, Sadar, Sirajganj	7.15	1.74	0.16	284	322
Tube-well, 50 feet, Pardevdanga, Kutubpur, Sariakandi, Bogra	7.15	2.34	2.76	297	289

Source: IUCN field survey, October 2014

According to local stakeholders, all drinking water tube-wells within the project area have been analyzed for arsenic by Department of Health Engineering (DPHE). However, none

of the tube-wells have been marked 'red' which means traces of arsenic in groundwater have not been detected.

5.10. Soil Quality

Soil samples were collected from deep channels, shallow channels and banks of the Jamuna at seven different locations. The collected soil samples were analyzed for pH, moisture content, nitrogen, phosphorus, potassium and sulfur; the analysis results are given in **Table 5.21**.

Table 5.21: Analysis of Soil Samples collected from Project Area

Sample ID	pH	Moisture Content	Texture	Total Nitrogen (ppm)	Total Phosphorus (ppm)	Total Potassium (ppm)	Total Sulfur (ppm)
Antarpara (Country Side)	7.29	31.17 %	Silty Clay Loam	710	710	4270	5720
Antarpara (Embankment)	7.44	7.08 %	Silt Loam	890	730	3960	3540
Antarpara (Right Bank, River Side)	7.30	28.22 %	Silt Loam	1050	640	5440	4540
Antarpara (Deep channel of Jamuna)	7.77	22.15 %	Fine Sand	380	660	1890	1650
Antarpara (Left Bank, Char)	7.32	24.50 %	Silt Loam	830	670	5000	4280
Baliaghuri (Country Side)	7.39	20.92 %	Silt Loam	1190	750	4720	5450
Baliaghuri (Embankment)	7.40	10.69 %	Silt Loam	890	740	3510	3760
Baliaghuri (Right Bank, River Side)	7.48	20.26 %	Silt Loam	820	760	4400	4930
Baliaghuri (Deep channel of Jamuna)	7.62	20.15 %	Fine Sand	490	450	1160	1460
Baliaghuri (Left Bank, Char)	7.42	22.27 %	Loamy Fine Sand	440	600	3350	2740
Pukuria (Country Side)	7.32	25.23 %	Loam	650	620	4540	4410
Pukuria (Embankment)	7.43	20.36 %	Loam	940	580	4670	3890
Pukuria (Right Bank, River Side)	7.15	28.22 %	Sandy Clay	690	570	4980	5670

Sample ID	pH	Moisture Content	Texture	Total Nitrogen (ppm)	Total Phosphorus (ppm)	Total Potassium (ppm)	Total Sulfur (ppm)
Bank, River Side)			Loam				
Pukuria (Deep of channel of Jamuna)	7.96	21.50 %	Fine Sand	790	450	1310	1500
Pukuria Left Bank, Char)	7.39	17.84 %	Silt Loam	710	710	4270	5720

Methodology / Instruments:

01	pH = pH meter	05	Sulfur = Turbidimetric method
02	Moisture Content = Moisture Analyzer	06	Total Potassium = Flame Photometer
03	Texture = Hydrometer method	07	Phosphorus = Vanadomolybdophosphoric yellow color method in nitric acid system
04	Total Nitrogen = Kjeldahl method		

The soil samples were also tested for pesticide residues (including dieldrin, endrin, DDT, and aldrin) by gas chromatography method and results came out negative indicating soil samples to be of adequate quality.

6. Description of Ecological Environment

This chapter describes the existing ecological and biological conditions of the project area. This description has been prepared with the help of secondary literature review and field data collection. A more detailed description is included in the Baseline report that is available under a separate cover.

6.1. Overview: State of Biodiversity

Bangladesh has a rich biological heritage, because of its location in the subtropical belt, at the confluence of two biotic realms, namely 'Indo-Himalayas' and 'Indo-China'. The distributional ranges of many species typical to each of these two biotic realms have overlapped in Bangladesh. This makes the country's biodiversity exceptionally rich (Table 6.1).

Table 6.1: Biodiversity in Bangladesh and in Project Area

Taxon	Species in Bangladesh (Number)	Species in Project Area	
		(Number)	% of the Country's Total
Fauna	1051	331	31.5
Mammals	128	25	20
Birds	706	255	36
Reptiles	168	36	21
Amphibians	49	15	31
Flora	7095	67	0.944
Algae	3,600		
Bryophytes	290		
Pteridophytes	200		
Gymnosperms	5	2	40
Angiosperms	3,000	512*	17

Source: IUCN-Bangladesh 2000, Consultant Ecological Survey, Khan 2014, Hassan 2003.

In the past, several surveys were conducted to know the biodiversity status of Bangladesh, but there was no such attempt in the project area despite the fact that the area is situated near the 'Himalayan Hotspot' which is one of the important biodiversity hotspots among the 35 biodiversity hotspots of the world (Conservation International 2014). Therefore, a detailed baseline survey is required, covering all the seasons and all the habitat types, so that the actual status of biodiversity in the project area is known.

The project area in the Brahmaputra River System falls within two of the 12 Bio-ecological Zones of Bangladesh, as designated by IUCN in 2002 (Nishat *et al.* 2002). These are 'Major Rivers' and 'Floodplain (Teesta)' (Figure 6.1). Therefore, the ecosystems and the species composition are relatively homogeneous across the project area (Table 6.2). The area, however, harbors some excellent habitats of the Ganges River Dolphin (*Platanista gangetica*) and wintering grounds of many migratory birds. The two

newly-declared (declared in 2013) dolphin sanctuaries (Nagarbari-Mohanganj Wildlife Sanctuary - 408.11 ha, and Shilonda-Nagdemra Wildlife Sanctuary - 146.00 ha) in the downstream of the project area supports the source population of the Ganges River Dolphin. These Sanctuaries were declared under the Wildlife (Conservation and Security) Act, 2012. Since both are newly established, no management plan has yet been prepared and implemented, but the areas get the protection on the basis of the Clauses 13-16 of the Wildlife Act.

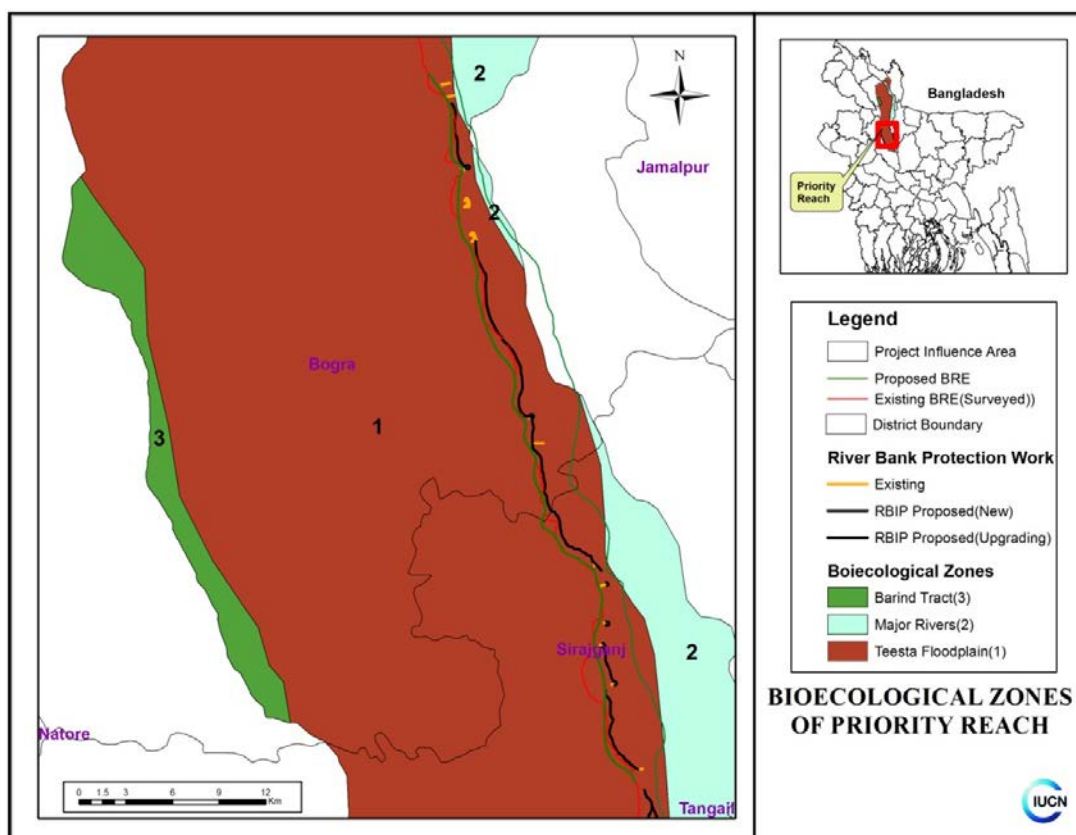


Figure 6.1: Bio-ecological Zones in the Project Area

Table 6.2: Notable floral and faunal diversity of two Bio-ecological Zones ['Major Rivers' and 'Floodplain (Teesta)']

Bio-ecological Zone	Notable Flora	Notable Fauna
Major Rivers	Binna Ghash (<i>Vetiveria zizanioides</i>), Kansh (<i>Saccharum spontaneum</i>), Ghagra (<i>Xanthium indicum</i>), Ban Palang (<i>Rumex meritimus</i>)	Ganges River Dolphin (<i>Platanista gangetica</i>), Bengal Fox (<i>Vulpes bengalensis</i>), Greater Bandicoot Rat (<i>Bandicota indica</i>), River Lapwing (<i>Vanellus duvaucelii</i>), Black-bellied Tern (<i>Sterna acuticauda</i>), Sand Lark (<i>Calandrella raytal</i>), Spot-billed Duck (<i>Anas poecilorhyncha</i>), Small Pratincole (<i>Glareola lactea</i>), Cantor's

Bio-ecological Zone	Notable Flora	Notable Fauna
		Softshell Turtle (<i>Pelochelys cantorii</i>), Gharial (<i>Gavialis gangeticus</i>), Ganges Softshell Turtle (<i>Aspideretes gangeticus</i>), Median Roofed Turtle (<i>Kachuga tentoria</i>), Jerdon's Bull Frog (<i>Hoplobatrachus crassus</i>), Skipper Frog (<i>Euphlyctis cyanophlyctis</i>)
Floodplain (Teesta)	Aam (<i>Mangifera indica</i>), Kanthal (<i>Artocarpus heterophyllus</i>), Kalo Jam (<i>Syzygium cumini</i>), Litchu (<i>Litchi chinensis</i>), Bhant (<i>Clerodendrum viscosum</i>), Danda Kalash (<i>Leucus aspera</i>), Jiban (<i>Trema orientalis</i>), Pitali (<i>Trewia nudiflora</i>), Barun (<i>Crataeva nurvala</i>), Hijal (<i>Barringtonia acutangula</i>), Kachuripana (<i>Eichhornia crassipes</i>), ShadaShapla (<i>Nymphaea nouchali</i>), Panchuli (<i>Nymphoides indicum</i>), Singara (<i>Trapa bispinosa</i>), Bara Nukha (<i>Monochoria hastata</i>), Foxtail (<i>Rhynchosstylis retusa</i>), Rasna (<i>Vanda roxburghii</i>)	Five-striped Palm Squirrel (<i>Funambulus pennanti</i>), Jungle Cat (<i>Felis chaus</i>), Tomb Bat (<i>Taphozous saccolaimus</i>), Darter (<i>Anhinga melanogaster</i>), Brown Fish Owl (<i>Ketupa zeylonensis</i>), Black Francolin (<i>Francolinus francolinus</i>), Sand Lark (<i>Calandrella raytal</i>), Three-striped Roofed Turtle (<i>Kachuga dhongoka</i>), Brown Roofed Turtle (<i>Kachuga smithii</i>), Dark-bellied Marsh Snake (<i>Xenochrophis cerasogaster</i>), Slender Work Snake (<i>Typhlops porrectus</i>), Ornate Microhylid (<i>Microhyla ornata</i>), Red Microhylid (<i>Microhyla rubra</i>)

(Source: Nishat et al. 2002)

6.1.1. Ecosystem Diversity

Broadly the ecosystem in the project area can be divided into two groups: i) freshwater aquatic, and ii) terrestrial. The aquatic ecosystem is mostly rivers and other natural wetlands that can be further divided into lentic and lotic depending on the flow of water. The terrestrial ecosystem, on the other hand, includes both human-induced (villages and crop fields) and natural (riparian grasslands, reed-lands and sandbars) areas.

6.1.2. Threatened Species

Though the project area does not support any globally threatened species of plants, it has five species of plants that are nationally threatened, which are:

- Sarpogandha or Indian Snakeroot (*Rauvolfia serpentina*),
- Haritaki (*Terminalia chebula*),
- Jay Ghash (*Cymbopogon osmastonii*),
- *Gastrodia zeylanica* and
- *Limnophila cana* (according to the *Red Data Book of Vascular Plants of Bangladesh* by Khan et al. 2001).

The bio-ecological zones between Jamuna and Padma (**Figure 6.1**) carry a number of threatened species of vertebrates (**Table 6.3**). Among them the Ganges River Dolphin is most significant. The project area also supports a healthy population of this globally and nationally threatened species. A total of nine species of globally threatened vertebrate

(wildlife) occur in the area. In terms of nationally threatened species, as many as 32 vertebrate wildlife and 22 freshwater fish are known to occur in the project area. For the threatened wildlife other than the Ganges River Dolphin, the population is either small or is supported only during winter periods such as migratory birds.

Table 6.3: Globally and Nationally Threatened Species of Vertebrates

Name of Species	Global Status	National Status
Mammals		
Ganges River Dolphin (<i>Platanista gangetica</i>)	Endangered	Endangered
Jackal (<i>Canis aureus</i>)	-	Vulnerable
Jungle Cat (<i>Felis chaus</i>)	-	Endangered
Fishing Cat (<i>Prionailurus viverrinus</i>)	Vulnerable	Endangered
Common Mongoose (<i>Herpestes edwardsi</i>)	-	Vulnerable
Common Palm Civet (<i>Paradoxurus hermaphroditus</i>)	-	Vulnerable
Large Indian Civet (<i>Viverra zibetha</i>)	-	Endangered
Small Indian Civet (<i>Viverra indica</i>)	-	Vulnerable
Birds		
Comb Duck (<i>Sarkidiornis melanotos</i>)	-	Critically Endangered
Brown Fish Owl (<i>Ketupa zeylonensis</i>)	-	Vulnerable
River Lapwing (<i>Vanellus duvaucelii</i>)	-	Endangered
Black-bellied Tern (<i>Sterna acuticauda</i>)	Vulnerable	Endangered
Darter (<i>Anhinga melanogaster</i>)	-	Vulnerable
Lesser Adjutant (<i>Leptoptilos javanicus</i>)	Vulnerable	Endangered
Reptiles		
Gharial (<i>Gavialis gangeticus</i>)	Endangered	Critically Endangered
Median Roofed Turtle (<i>Pangshura tentoria</i>)	-	Endangered
Indian Eyed Turtle (<i>Morenia petersi</i>)	Vulnerable	Vulnerable
Ganges Softshell Turtle (<i>Aspideretes gangeticus</i>)	Vulnerable	Endangered
Peacock Softshell Turtle (<i>Nilssonina hurum</i>)	Vulnerable	Endangered
Asiatic Softshell Turtle (<i>Chitra indica</i>)	Endangered	Critically Endangered
Spotted Flapshell Turtle (<i>Lissymis punctata</i>)	-	Vulnerable
Bengal Monitor (<i>Varanus bengalensis</i>)	-	Vulnerable
Yellow Monitor (<i>Varanus flavescens</i>)	-	Endangered
Common Vine Snake (<i>Ahaetulla nasutus</i>)	-	Vulnerable
Indian Rat Snake (<i>Ptyas mucosa</i>)	-	Vulnerable
Common Wolf Snake (<i>Lycodon aulicus</i>)	-	Vulnerable
Common Krait (<i>Bungarus caeruleus</i>)	-	Endangered
Banded Krait (<i>Bungarus fasciatus</i>)	-	Endangered
Monocled Cobra (<i>Naja kaouthia</i>)	-	Vulnerable
Spectacled Cobra (<i>Naja naja</i>)	-	Endangered

Name of Species	Global Status	National Status
AMPHIBIANS		
Ornate Microhylid (<i>Microhyla ornata</i>)	-	Vulnerable
Fish		
Humped Featherback (<i>Notopterus chitala</i>)	-	Endangered
Grey Featherback (<i>Notopterus notopterus</i>)	-	Vulnerable
Indian Grass Barb (<i>Chela laubuca</i>)	-	Endangered
Kalbasu (<i>Labeo calbasu</i>)	-	Endangered
Olive Barb (<i>Puntius sarana</i>)	-	Critically Endangered
Firefin Barb (<i>Puntius ticto</i>)	-	Vulnerable
Necktie Loach (<i>Botia dario</i>)	-	Endangered
Long-whiskered Catfish (<i>Aorichthys aor</i>)	-	Vulnerable
Giant River-catfish (<i>Aorichthys seenghala</i>)	-	Endangered
Assamese Batasio (<i>Batasio tengana</i>)	-	Endangered
Rita (<i>Rita rita</i>)	-	Critically Endangered
Pabdah Catfish (<i>Ompok pabda</i>)	-	Endangered
GaruaBacha (<i>Clupisoma garua</i>)	-	Critically Endangered
BatchwaBacha (<i>Eutropiichthys vacha</i>)	-	Critically Endangered
ShilondiaVacha (<i>Silonia silondia</i>)	-	Endangered
Pungas (<i>Pangasius pangasius</i>)	-	Critically Endangered
Gangetic Goonch (<i>Bagarius yarrellii</i>)	-	Critically Endangered
Elongate Grass-perchlet (<i>Chanda nama</i>)	-	Vulnerable
Indian Glassy Fish (<i>Pseudambassis ranga</i>)	-	Vulnerable
Mottled Nandus (<i>Nandus nandus</i>)	-	Vulnerable
Giant Snakehead (<i>Channa marulius</i>)	-	Endangered
Tire-track Spinyeel (<i>Mastacembalus armatus</i>)	-	Endangered

(Source: BirdLife International 2014, IUCN 2014, IUCN-Bangladesh 2000)

6.1.3. Critical Natural Habitats

In the project area there is no legal or officially proposed Protected Area. However there are some areas with high conservation value such as char land where migratory birds inhabit each year and some spots of the Jamuna river where dolphin populations were found. Among the available habitats, however, the most notable are parts of the river (unpolluted, deep and rich in fish) that are hotspots (i.e. high density areas) for the Ganges River Dolphin and the uninhabited 'Char' lands that are the shelters of thousands of migratory winter birds and the nesting grounds of many resident birds like wild ducks and terns. Based on the field visits and on the FGDs in and around the project area, the high density areas for dolphins and winter birds were marked (**Figures 6.2 and 6.3**).

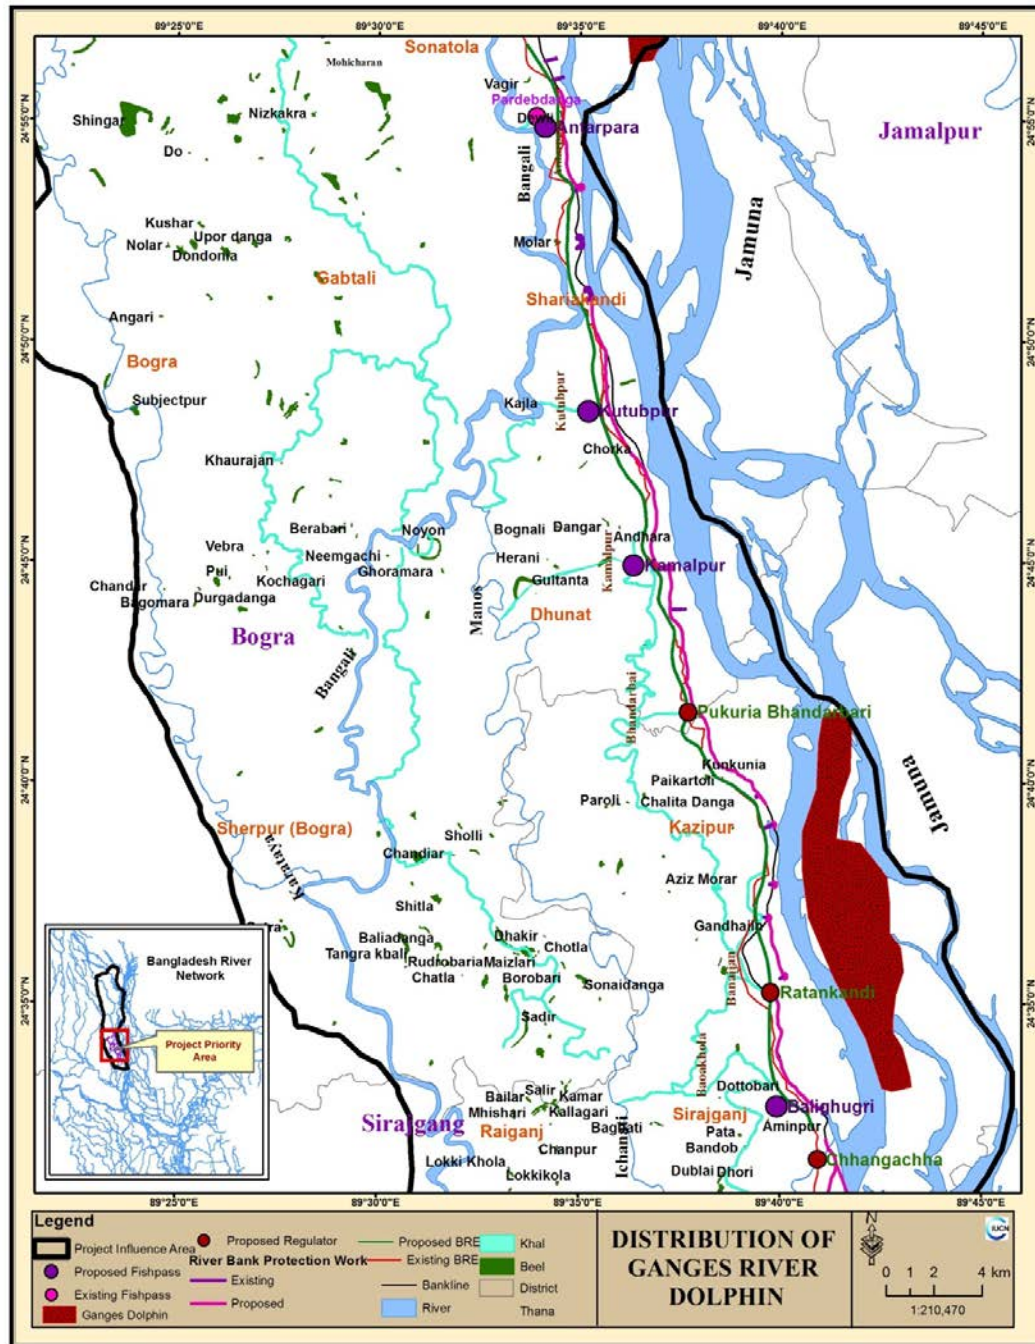


Figure 6.2: High Density Areas for Ganges River Dolphin (marked with red shade)

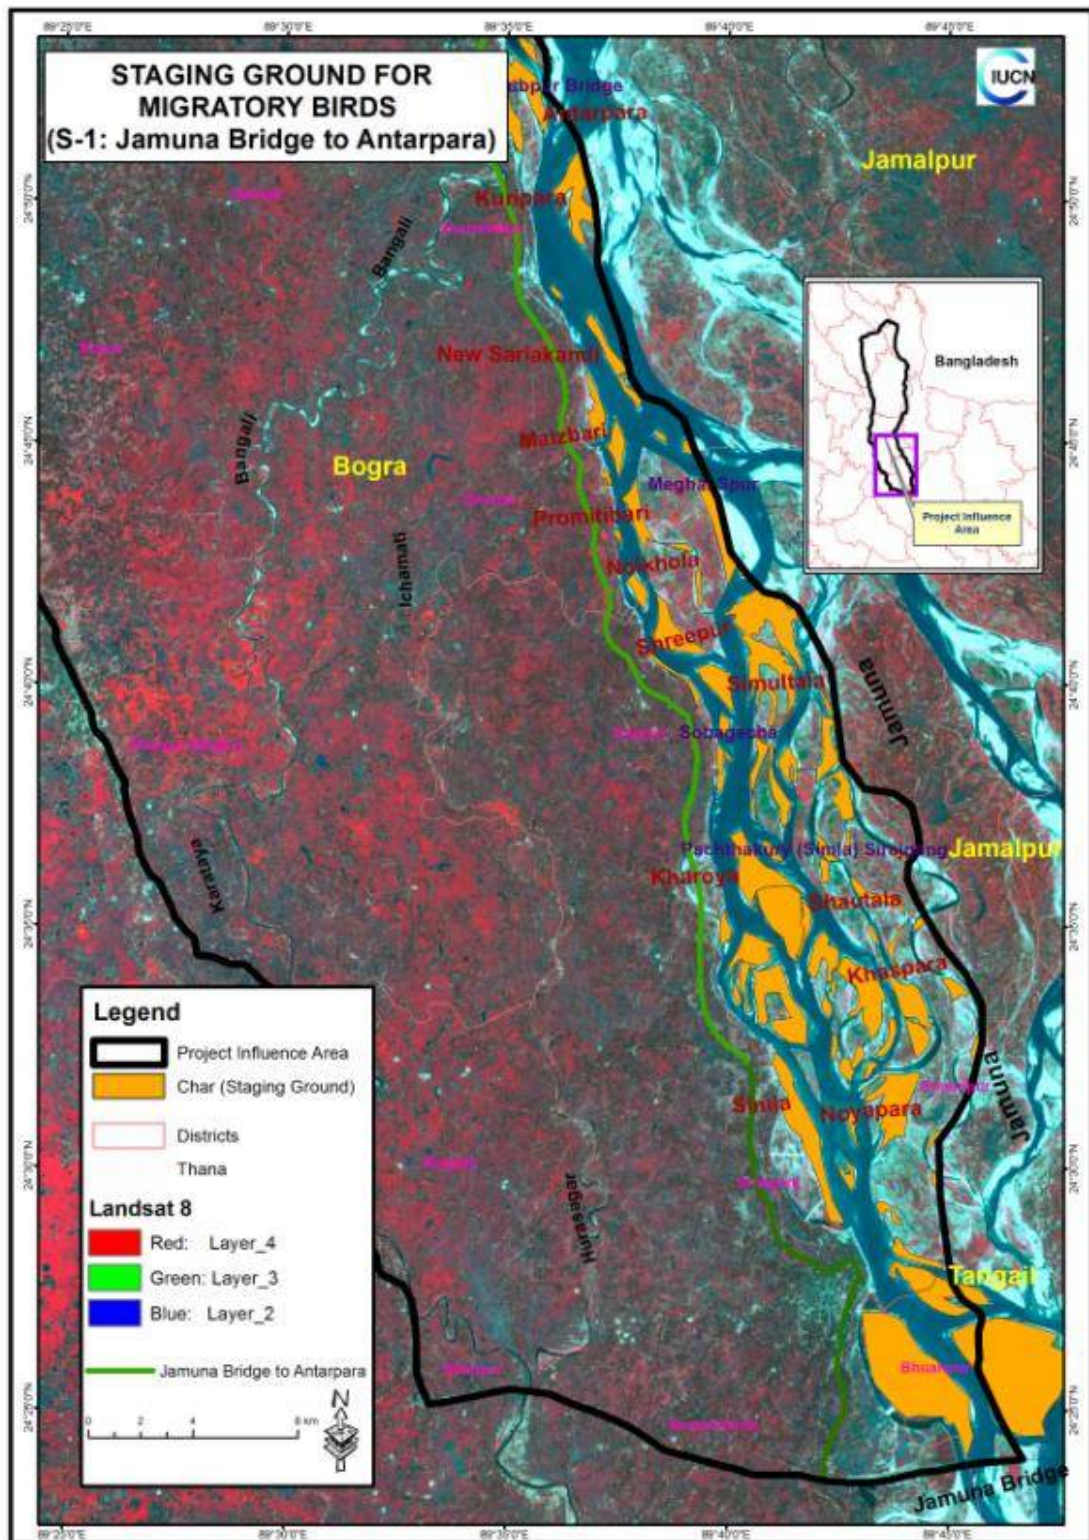


Figure 6.3: Wintering/staging grounds for migratory winter birds in the project area (marked with orange color)

6.2. Project Area Ecosystems

Most of the project area is under some kind of human influence, because very high population pressure, which includes new settlements and expansion of agriculture even in remote 'Char' lands of the river. The total area of terrestrial ecosystem in the priority area is about 268,466 ha, of which the agricultural land (53.01 percent) and the settlement (28.59 percent) are dominant (see Table 5.9). (needs to be confirmed whether for Priority Reach or not).

6.2.1. Human Influence

The people living in the project area exert high regressive influence on the surrounding ecosystems. Most of the people living in that area possess a sub-standard primitive life style. Their main source of livelihood is agriculture. Vast areas of stable and unstable floodplains have been subjected to the regression of tillage, mostly due to extensive agricultural activities. Such activities of the local people have seriously jeopardized the natural vegetation. There is no sign of natural succession, rather retrogradation of the natural vegetation is commonly seen.

Since the unstable areas are subjected to frequent erosions, the local people do not plant any long rotation species in these areas. Very often fast growing species on a very short rotation cycle are planted in these areas. Commonly used species is Eucalyptus, which not only deplete the soil but also impairs the wildlife diversity, especially of the birds in the rural areas. During the FGDs and consultation meetings it transpired that the local people in the unstable zones has their choice for fast growing species whereas those in stable zones has their choice for long rotation horticultural species such as jackfruit and mango. Under this given scenario, the project may bring in opportunities of planting more of the long rotation species such as tamarind, mahogany, and may also induce 'social forestry' programs. Such type of initiatives is likely to help the local people to develop their socio economic condition and improve biodiversity as well. In the stable floodplains people build houses and plant long rotation horticultural and timber species. The planted horticultural species are used by people in many ways and allows small pockets of natural vegetation in the interspaces of the planted trees, particularly in the backyards of the homesteads.

6.2.2. Terrestrial Ecosystems

The terrestrial ecosystem in the project area is dynamic and is heavily influenced by the water flow of the mighty Brahmaputra-Jamuna River System. It is dominated by the agricultural landscape and homestead areas (see Figures 6.4 and 6.5), but there are also vast areas of Char lands that are covered by sungrass, reeds and other natural vegetation.



Figure 6.4: Homestead vegetation in the project area



Figure 6.5: Agricultural land and planted exotic Eucalyptus trees in the project area

Strong bond exists between the terrestrial and aquatic ecosystems through the food chain and the exchange of energy. The terrestrial ecosystems are often shaped and controlled by the flow of the river, and sometimes even engulfed by the riverbank erosion. In the terrestrial ecosystems all along the project area the proportional areas with canopy cover and the crop cover are inversely correlated ($R^2 = -0.779$) in all 12 Upazila of the project area (**Figure 6.6**). It indicates that the crop cover areas gradually convert into canopy cover, because canopy cover is seen in the permanent floodplains around human settlements. This is relatively a recent trend, probably due to the high demand of land for cultivation. Thus agriculture is getting extended even to the new fragile floodplains. These floodplains are mostly under agricultural use and tree planting is minimal.

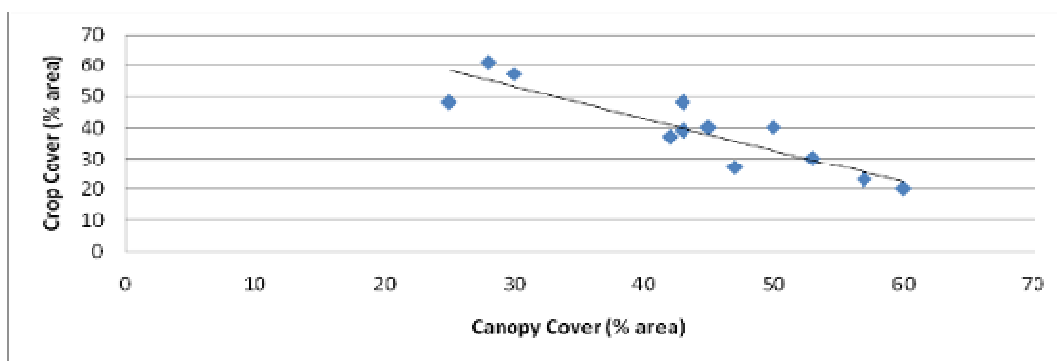


Figure 6.6: Strong negative linear relationship between to proportions of canopy cover and crop cover across 12 Upazila of the project area

6.2.3. River-Charland-Wetland Ecosystems

The most important ecosystems in terms of biodiversity are the river-char-wetland ecosystems with natural vegetation and mudflats (see **Figure 6.7**) that support a wide variety of wildlife, particularly the migratory winter birds.



Figure 6.7: 'Char' land ecosystem in the project area

6.2.3.1. River Ecosystem

The Jamuna River and its tributaries provide three important functions:

- Habitat for numerous species of vertebrates and invertebrates. Most of those species are found throughout Jamuna and also other rivers and floodplain systems in the country; for them the project area is not a critical biotope. For a number of endangered species, however, the area might have special value. Various fish breeding and nursing grounds are located close to the area. The fresh water aquatic ecosystem of Brahmaputra–Jamuna River and its tributaries are the lifeline of the Ganges River Dolphin and some threatened species of turtles (**Table 6.3**).
- Corridor for migratory species, including fish (to and from breeding and nursing grounds) and birds (using the river as migration guidance). For numerous non-migratory species the river systems provide an opportunity for survival of fragmented

or isolated communities. The corridor function of rivers for plant seeds and spores is important as well.

- Production of harvestable organisms, mainly fish. The Jamuna is fished throughout the year by professional and temporary fishermen with a variety of gear.

6.2.3.2. Charland Ecosystem

Charlands (shoals) are newly accreted lands from river deposits. The Jamuna main channel is constantly shifting within its active floodplain, eroding and depositing large areas of new charland in each flooding season. If new charlands do not erode quickly, they are colonized by pioneer vegetation (especially *Crotolaria retusa*, *Phragmites karka*, *Saccharum spontaneum* and *Ipomoea sp.*). Dense growth of these tall grasses starts anchoring the loose deposits and accelerates further silt deposition. Subsequently, either natural succession (by other grasses, bushes and finally trees) or human activities result in development of habitable land. Details of charlands in the project area are given in **Section 5.3.2**.

The ecological importance of these charlands is considerable; they provide:

- **Habitat.** Young, vegetated charlands form a major habitat for the Bangladeshi vertebrate fauna: mammals, birds, reptiles and amphibians. The areas are relatively free from noise and other disturbances, whereas the mixed vegetation and the large number of water bodies support a rich hunting, feeding and roosting habitat. A range of waterfowl, both local and migratory, are directly or ecologically dependent on charland ecosystems. In winter, migratory birds roam in these chars and some resident birds use these charlands as their breeding grounds. Charlands having less or no human interference harbor rich bird diversity. In the project area based on our FGD we found that 'charland' which is situated at least 10-12 km away from countryside harbor a good number of bird species, probably due to less human disturbances.
- **Reproduction area.** This represents the foremost ecological importance of charlands and their submerged extensions (wetlands and shallow riverine areas). Aquatic reptiles (among which the endangered turtles) lay their eggs in the sandy beaches, mostly between December and February. For many riverine fish and crustacean species the shallow submerged parts of the charlands are indispensable breeding and nursing grounds.
- **Settlement and livelihood.** Given the shortage of land in Bangladesh, stabilized charlands are quickly occupied by farmers and fishermen, profiting from the natural richness of these new and fertile lands.

6.3. Vegetation

The vegetation in the project area can be divided into planted and natural vegetation. The common tree species are 39 in number. They are commonly Eucalyptus, Acacia, Jackfruit, and Mango. The relative diversity of major plant species across 12 Upazila in the project area (based on samples taken) exhibits that four Upazilas (Sirajganj Sadar, Kazipur, Sariakandi and Gaibandha Sadar) possess higher tree diversity over the others (**Figure 6.8**). Based on the direct observations and FGDs, a total of 66 plant species were identified that are commonly seen, of which there are 39 trees, 24 herbs and shrubs, and 3 bamboo (the detailed list is available in the Baseline report).

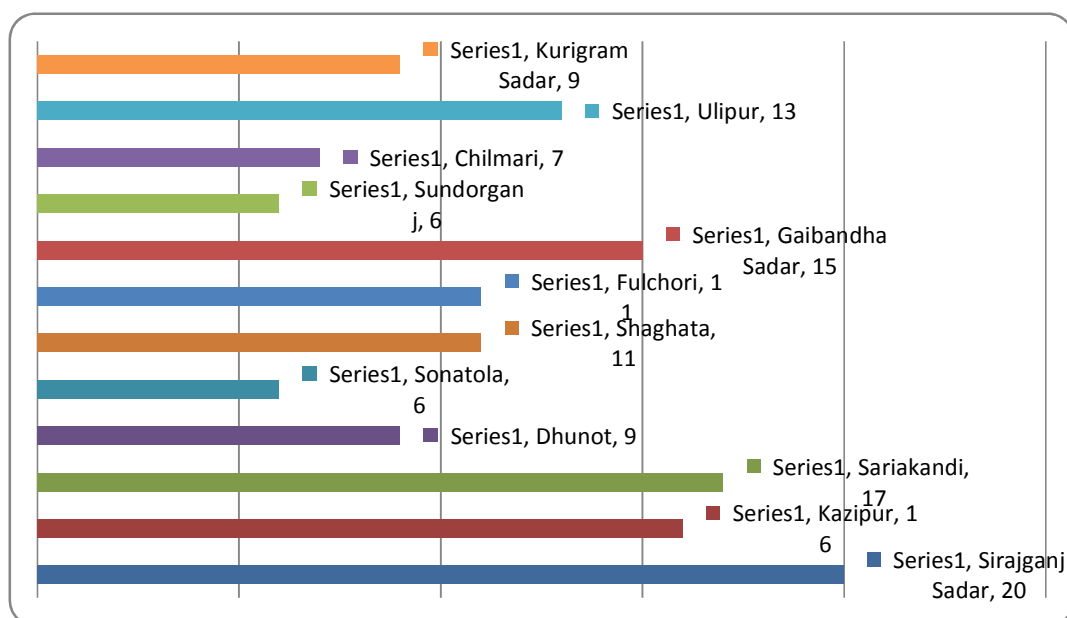


Figure 6.8: Relative diversity of major plant species across 12 Upazilas of the project area (based on the presence of major plant species in quadrats)

6.3.1. Terrestrial Vegetation

In the terrestrial ecosystems, the trees are normally found in the homesteads, settlements and along the embankment. The trees of different species were counted in the random quadrats in all the 12 Upazilas of the project area (results of the survey are presented in the Baseline report). It is evident that both the diversity and density of the tree species vary across 12 Upazilas. There are timber trees to meet the needs of timber and the fruiting trees to provide food, but there are many other trees that are used for various purposes. Some of them are used for medicinal and construction purposes. These tree and shrub species help people to meet their daily needs by providing fuel wood, and fruits. Among all these species Jackfruit is one of the most popular species because of its multi output. As this species provide fruit, fuel wood, fodder and timber as well. But it is less in number where flood is very frequent and land formation change in every year. Based on FGD it was found that the three main purposes of planted trees are fruit, firewood and timber production (**Figure 6.9**), but it slightly varies across the 12 Upazilas. In the open and uncultivated areas the plants that are normally seen are Binna Ghash (*Vetiveria zizanioides*), Kansh (*Saccharum spontaneum*), Chhan (*Impera tacylindrica*), Ghagra (*Xanthium indicum*), Ban Palang (*Rumexmeritimus*), Kolmi (*Ipomoeaspp.*), and legumes.

In the agricultural fields, on the other hand, the common cultivated crops are paddy (*Oryza sativa*), wheat (*Triticum aestivum*), jute (*Corchoruscapsularis*), sugarcane (*Saccharumofficinarum*), potato (*Solanumtuberosum*), mustard (*Brassica campestris*), ground-nut (*Terminalia catappa*), pea (*Pisum sativum*) and a wide variety of seasonal vegetables. Wide variety of paddy is cultivated in different season, synchronizing with the water condition. More than one crop is cultivated in most of the agricultural fields. The fields might remain barren for short periods of time between the cropping seasons.

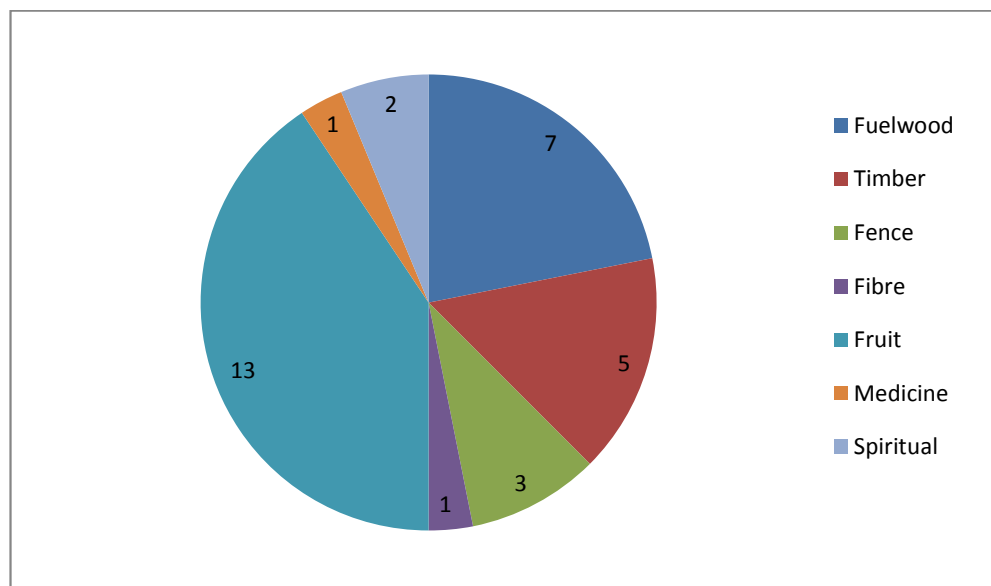


Figure 6.9: Principal uses of 33 major plants in the project area based on FGD

6.3.2. Aquatic Vegetation

The aquatic vegetation is mostly seasonal and is flourished when there is plenty of water during the wet season (see **Figure 6.10**). There is, however, some aquatic species like Hijal (*Barringtonia acutangula*) that are not seasonal and can survive during the dry season as well. The common aquatic plants in the project area include Kachuripana (*Eichhornia crassipes*), Shada Shapla (*Nymphaea nouchali*), Panchuli (*Nymphoides indicum*), Singara (*Trapa bispinosa*) (Nishat *et al.* 1993, Nishat *et al.* 2002). Species like ‘Kachuripana’ grow well in the stable aquatic environment where water flow is less or absent. In the project area this species is very abundant in pond and lake. On the other hand, aquatic vegetation is absent in the mighty Jamuna-Brahmaputra River, but still there are some aquatic vegetation where water flow is less.



Figure 6.10: Aquatic Vegetation

6.3.3. Exotic Species

The two very common tree species in the project area are exotic species, viz. Acacia (*Acacia* spp.) and Eucalyptus (*Eucalyptus* spp.). These were introduced in the area and rapidly became popular, because these grow fast and can be harvested in several years. These are particularly popular in the charlands and riverbanks, because these areas are prone to erosion, so long-rotation trees are not preferred.

6.4. Wildlife

Diverse wildlife species, particularly birds, are known to occur in the project area. Based on the direct observation, FGD and secondary sources a total of 89 vertebrate wildlife species were identified that are commonly seen, including 7 amphibian, 11 reptile, 62 bird, and 9 mammal species (the detailed list is presented in the Baseline report). The relative abundance shows that a total of 38 species are Very Common, 31 Common, 15 Uncommon, and 5 are Rare.

Most of the wildlife species that were recorded in the project area were recorded in all Upazilas, but some species were recorded in a few Upazilas only. It is possible that all Upazilas have these species, but further surveys are required to confirm the Upazilla-wise records. Based on FGD in 12 Upazilas of the project area it was found that the relative diversities of vertebrate wildlife species vary across 12 Upazilas. The highest relative diversity was reported from Sariakandi Upazilla (see **Figure 6.11**).

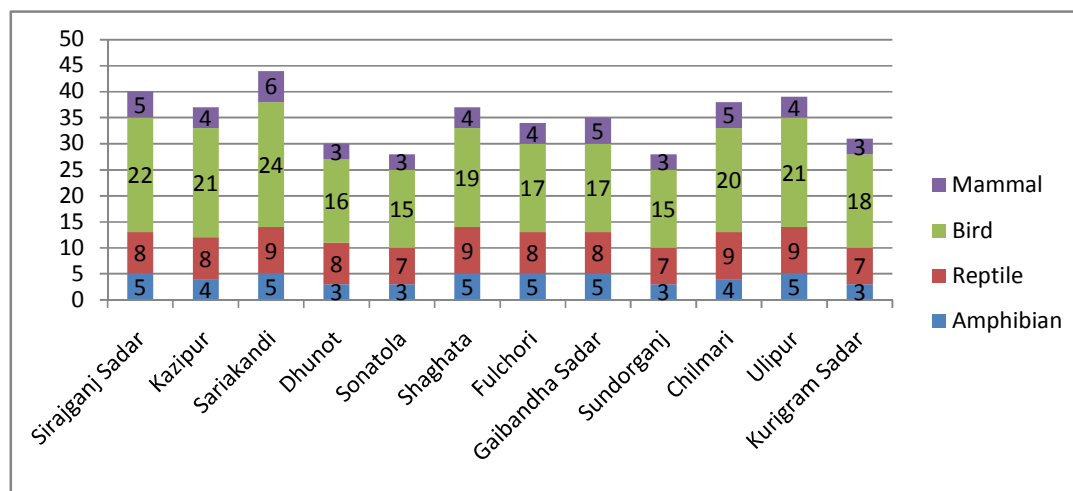


Figure 6.11: Relative diversity of common vertebrate wildlife species across 12 Upazilas of the project area (based on FGD)

6.4.1. Mammals

The mammalian species diversity and density are relatively low in the project area, because a large proportion of the area is wetlands of some kind that are not suitable for terrestrial mammals. The mammals that occur in and around wetlands are common and widespread. A total of 25 species of mammal are known to occur in the project area (the complete list is presented in the Baseline report). The most notable is the Ganges River Dolphin that occurs all along Brahmaputra River, including the major tributaries, but there are some hotspots where it is more common (**Figure 6.2**) (CARINAM 2011, FHRC 2013). Discussions during the FGDs have revealed that the dolphin number is declining due to accidental death to fishing nets, human disturbance and pollution.

Other common mammals of the area are Small Indian Mongoose (*Herpestes auropunctatus*), Golden Jackal (*aureus*), Indian Flying Fox (*Pteropus giganteus*), Jungle Cat (*Felis chaus*), Asian Palm Civet (*Paradoxurus hermaphroditus*), and many species of rats and mice. Ganges River Dolphin (*Platanista gangetica*; global status: Endangered) is also abundant in some specific location. Some of the above-mentioned mammals occasionally hunt the domestic chicken and duck, and are often killed by angry villagers. Therefore, their population trends are showing the signs of decline.

6.4.1.1. Ganges River Dolphin

The most notable species of the project area which is globally considered as threatened species. This species (**Figure 6.12**) is available in Ganga-Brahmaputra River system. In project area the species is frequently found in some point of Sirajganj, Bogra and Kurigram. Snout is long thinned; belly is rounded with large flippers. This species uses its eyes to locate object though it has no lens. It cannot breathe in water and surface every 30-120 seconds for breathing. Female is larger than males. Female attain sexual maturity at the age of ten. The Ganges River Dolphin will breed in a similar way to other dolphins, which includes breeding during the beginning of the year, and remaining pregnant for an average of 10 – 12 months. The diet includes a variety of fish and invertebrates. Globally, the number of their population is ranged from 1200-1800.

FGD and field survey were conducted to assess the distribution and status of Ganges River Dolphin. FGD was conducted during August-September and the vessel-based dolphin survey was conducted in November, 2014 as this is the period of minimum river discharge when dolphins are easiest to count within the project time. Survey was started from Sirajganj Hard Point, Sirajganj to Antarpura, Bogra. The survey was conducted within the priority area. 50 collinear transects of 1 km was established to cover river width and sampled the area as followed by Bashir *et al.* 2010. A motor boat with a constant speed between 6-9 km/hour was maintained in upstream and downstream direction following the deepest channel with a zig-zag pattern from bank to bank. A boat-based line-transect method as described by Smith & Reeves, 2000b and Krebs & Budiono, 2005 was adopted in which transects were sampled by five observers at a time with three Primary Observers stationed with different direction (right, left and front), one data recorder and one rear observer (observing 180° behind the survey vessel). Positions of observers were rotated every 30 minutes to avoid fatigue.



Figure 6.12: Ganges River Dolphin

At the time of each sighting, GPS location, time, and age category (e.g. adults, calves) of the individual was recorded. Survey track and location of dolphin was plotted in the GIS map. A dolphin group was defined as dolphins no more than 2 km apart, within an area of similar hydrological characteristics. Group sizes were evaluated with a best, high and low estimate of numbers to incorporate a degree of uncertainty. A low and best estimate of zero was used if the sighting was unconfirmed or if there was a possibility that the dolphin was following the vessel and might have already been counted. A 15 minute stoppage was made in areas of high dolphin abundance to make a more accurate group size estimate. All sightings were confirmed by a second observer. The observers took extreme care to eliminate repeated dolphin counts considering their spatio-temporal array and beak morphology (Mohan *et al.*, 1997).

The survey was conducted dual times to get the accurate data on the abundance and group size of Ganges River dolphin. On first survey the vessel based dolphin survey was conducted towards upstream direction and on the second survey it was conducted towards downstream direction.

The entire 50 km of priority area was surveyed, though we started our survey from Sirajganj Hard Point which is outside of priority area. A total of 19 dolphins were encountered in the field survey considering their three groups.

A zone (Transect-3) from Kutubpur to Bhandarbari (24°48'16.80"N to 24°43'30.66"N and 89°35'54.53"E to 89°37'28.63"E) was found with high abundance of dolphin population (3 dolphins per km) (see **Table 6.4; Figures 6.13 and 6.14**). About 64 percent of total dolphin population was encountered from this zone. On the other hand, dolphin population was very low in Transect-1 which is ranging from Shubgacha to Pachthakuri under Sirajganj District. In general, the encounter rate of Ganges River Dolphin in the study area is 0.38 dolphin per km.

Table 6.4: Distribution of Ganges River Dolphins in the Jamuna River

Location	GPS Coordinate	No. of Dolphin			Total	Transect Length, km	Encounter Rate (dolphin/km)	Average Distance from proposed Alignment, km
		Adults	Calves	Total				
Transect-1: Shubgacha to Pachthakuri (District: Sirajganj)	24.54406N- 89.68383E	1	0	2	19	4	0.5	0.9
	24.54542- 89.68214	1	0					
Transect-2: Meghai (District: Sirajganj)	24.66419N- 89.65692E	1	0	5		4	1.25	1.2
	24.66142N- 89.65692E	2	1					

Location	GPS Coordinate	No. of Dolphin			Total	Transect Length, km	Encounter Rate (dolphin/km)	Average Distance from proposed Alignment, km
		Adults	Calves	Total				
	24.66419N-89.6575E	1	0					
Transect-3: Kutubpur to Bhandarbari (District: Bogra)	24.78267N-89.60917E	1	0	12	4	3	1.4	
	24.785N-89.60775E	2	1					
	24.79718N-89.60211E	2	1					
	24.79983N-89.59967E	2	0					
	24.80092N-89.59917E	1	0					
	24.79826N-89.60109E	2	0					

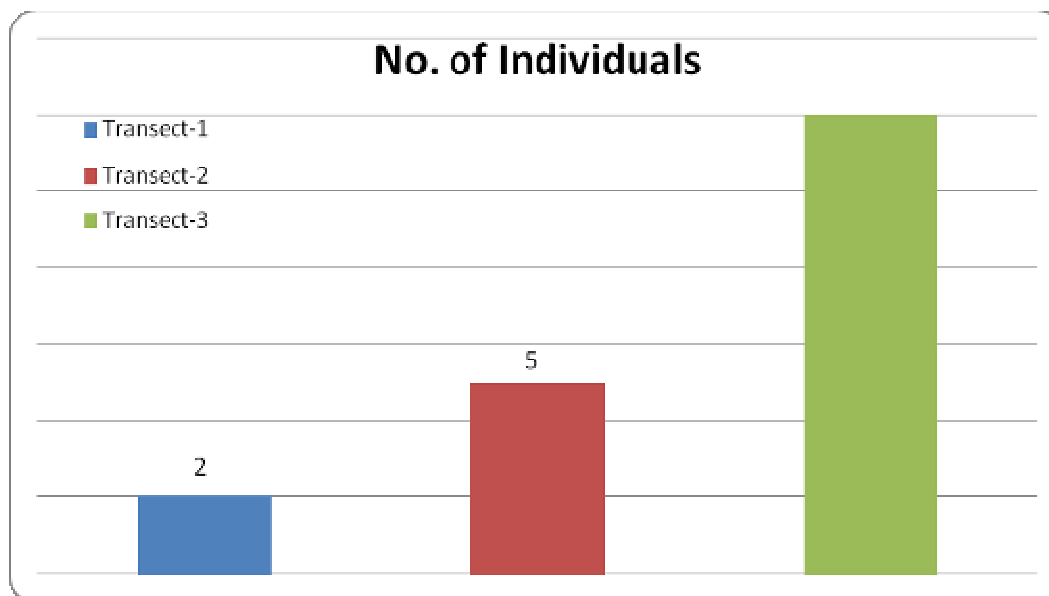


Figure 6.13: Relative abundance of Ganges River Dolphin in three transects

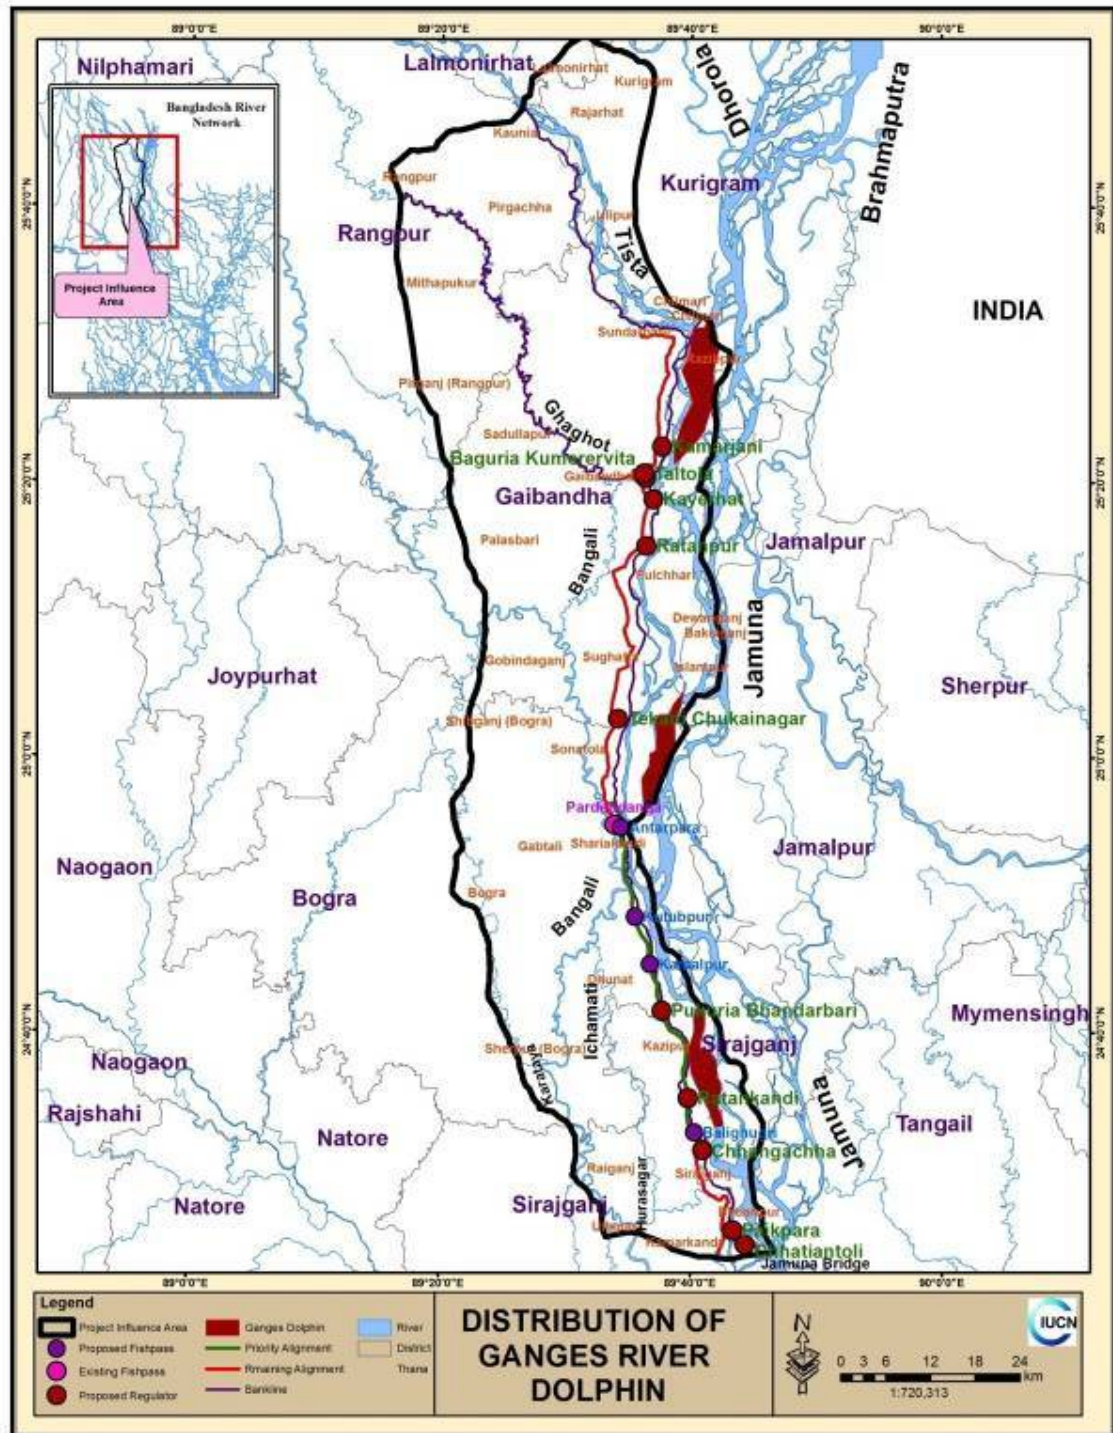


Figure 6.14: Distribution (i.e. high density areas) of Ganges River Dolphin in the project area (marked with red shade).

6.4.2. Birds

Huge congregation of migratory winter birds can be seen during November-March in the floodplains of Brahmaputra River (see **Figure 6.15**). Winter birds from the Himalayas, Central Asian highlands and faraway places like Siberia move to relatively warm

swampy lands in Bangladesh including the project area to escape the freezing cold, and feed on various animal and plant food that are abundant in the mudflats, sandflats, rice fields and other areas. Birds start arriving from early November and stay till March-April. An estimated 500,000 birds of about 150 species (mainly ducks, waders and warblers) travel to Bangladesh each winter.



Figure 6.15: Flock of Water Birds

A total of 255 species of bird are known to occur in the project area, of which a significant proportion is migratory winter birds. Some common migratory species include Ruddy Shelduck (*Tadorna ferruginea*), Northern Pintail (*Anas acuta*), Gadwall (*Anas strepera*), Common Sandpiper (*Actitis hypoleucos*), Wood Sandpiper (*Tringa glareola*),

and Little Stint (*Calidris minuta*) (complete lists are available in the Baseline report). Wide variety of breeding resident birds also occur in the aquatic and terrestrial ecosystems of the project area, viz. Lesser Whistling Duck (*Dendrocygna javanica*), Little Egret (*Egretta garzetta*), Pied Kingfisher (*Megaceryle lugubris*), Sand Lark (*Calandrella raytal*), Zitting Cisticola (*Cisticola juncidis*), Black Drongo (*Dicrurus macrocercus*), Oriental Magpie Robin (*Copsychus saularis*), Red-vented Bulbul (*Pycnonotus cafer*), Spotted Dove (*Streptopelia chinensis*), Large-billed Crow (*Corvus macrorhynchos*) and House Sparrow (*Passer domesticus*), and Whiskered Tern (*Chlidonias hybridus*) (see **Figure 6.16**), (Source: transect data and Asian Waterbird Census 2014). The FGD in the project area recorded that all ducks and geese, whether winter visitor or breeding resident, were showing declining trend due to illegal hunting for meat.



Figure 6.16: Flock of Whiskered Tern - a common bird in the project area

6.4.3. Reptiles

Since most of the reptiles are moisture-loving species, the project area is the home of many reptiles of medium and small sizes. A total of 36 species of reptiles are known to occur in the area (a complete list is provided in the Bseline report).

Some common reptiles of the area are Common Garden Lizard (*Calotes versicolor*), Common Skink (*Eutropis carinatus*), Common House Gecko (*Hemidactylus frenatus*), Checkered Keelback (*Xenochrophis piscator*), Binocellate Cobra (*Naja naja*), Peacock Softshell Turtle (*Nilssonia hurum*), Spotted Flapshell Turtle (*Lissemys punctata*) and Bengal Monitor (*Varanus bengalensis*) (Hasan et al. 2014). Common Garden Lizard and Common Skink were frequently sighted in the project area. On the other hand, Peacock Softshell Turtle and Spotted Flapshell Turtle are very rare in the project area. At the time of FGD people informed about the presence of turtles long time ago, and the turtles appear to be disappearing from the project site. Binocellate Cobra (**Figure 6.17**) is the common reptile in the project area. Other than turtles, the lizards and snakes do not show any significant trend of decline. Description of two threatened reptiles, Peacock softshell turtle and gharial, is presented below.

6.4.3.1. Peacock Softshell Turtle

The Peacock Softshell Turtle (*Nilssonia hurum*; global status: Vulnerable) has a distincti

ve soft-shell that is beautifully marked with dark olive green carapace reticulated with black (**Figure 6.18**). Carapace is also adorned with a narrow rim and numerous broken ridges. Its head is dark green to black with numerous yellow spot. They are oviparous and breeding activities take place in winter. Nesting takes place from December to March in chars. They inhabit in all major rivers of Bangladesh. They are currently rare in the project area.



Figure 6.17: Binocellate Cobra - a common reptilian the project area



Figure 6.18: Peacock Turtle

6.4.3.2. Gharial (*Gavialis gangeticus*)

The only large reptile in the area is the Gharial (*Gavialis gangeticus*) (**Figure 6.19**), which is extremely rare. It is a globally and nationally threatened species. Few decades ago it was a common species in the Ganges-Brahmaputra River System, but the population sharply declined due to the lack of food (fish), accidental killing by fishing nets and destruction of eggs by domestic dogs (Khan 1982). Today, it is one of the rarest species of wildlife in Bangladesh and there have been no report of its nesting since 1980s. It is possible that the individuals (mostly juvenile and young) that are rarely seen in the Ganges-Brahmaputra River System come from the neighbouring India and Nepal.

Gharial is categorized as ‘Critically Endangered’ according to IUCN Red List which means species is at high risk of extinction. After 2010 gharial was not recorded from the Jamuna-Brahmaputra river channel. In 2009 and 2010 gharial was encountered only two spot of Jamuna-Brahmaputra river channel (**Figure 6.20**) (CARINAM 2010). At the time of Dolphin Survey in project area, the team also searched for Gharials. But there was no evidence of the presence of this animal. Again at the time our Baseline survey during August and September several FGD was conducted and people confirmed that after 2011 they had not seen any Gharials in the Jamuna-Brahmaputra River. On the basis of these FGD and primary survey we can conclude that currently there are no Gharials in the project area.



Figure 6.19: Gharial- at its natural Habitat (Source- ARKIVE)

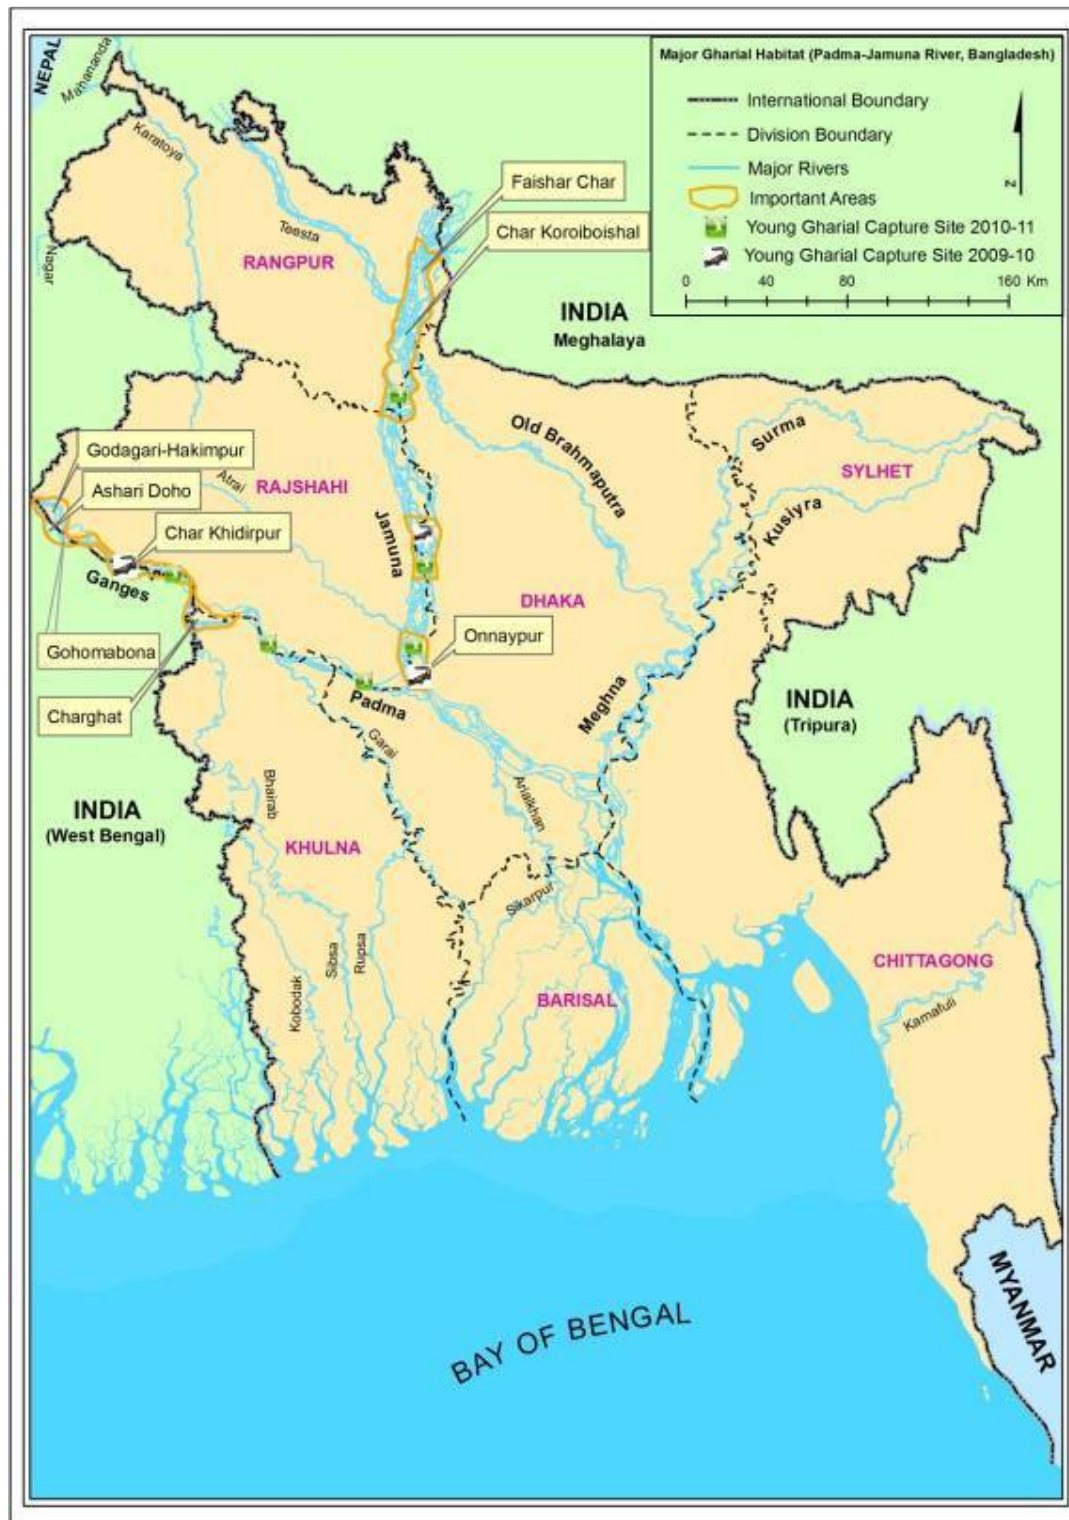


Figure 6.20: Distribution map of Gharials in 2010 (Source: CARINAM 2010)

6.4.4. Amphibians

The stagnant water bodies and the moist terrestrial areas offer vast habitats for amphibians. Therefore, the amphibians are very common in the project area. A total of 15

species are known to occur (the list is provided in the Baseline report under a separate cover). Among the amphibians, only the frogs and toads are found in the area. Some common species are Skipper Frog (*Euphlyctis cyanophlyctis*), Cricket Frog (*Fejervarya* spp.), Indian Bull Frog (*Hoplobatrachus tigerinus*), and Common Toad (*Duttaphrynus melanostictus*) (Hasan et al. 2014). See **Figure 6.21** for an amphibian species of the area. Since there is no notable threat to amphibians and there is no hunting for meat, none of the frog species show the trend of decline, which was recorded during the FGD.

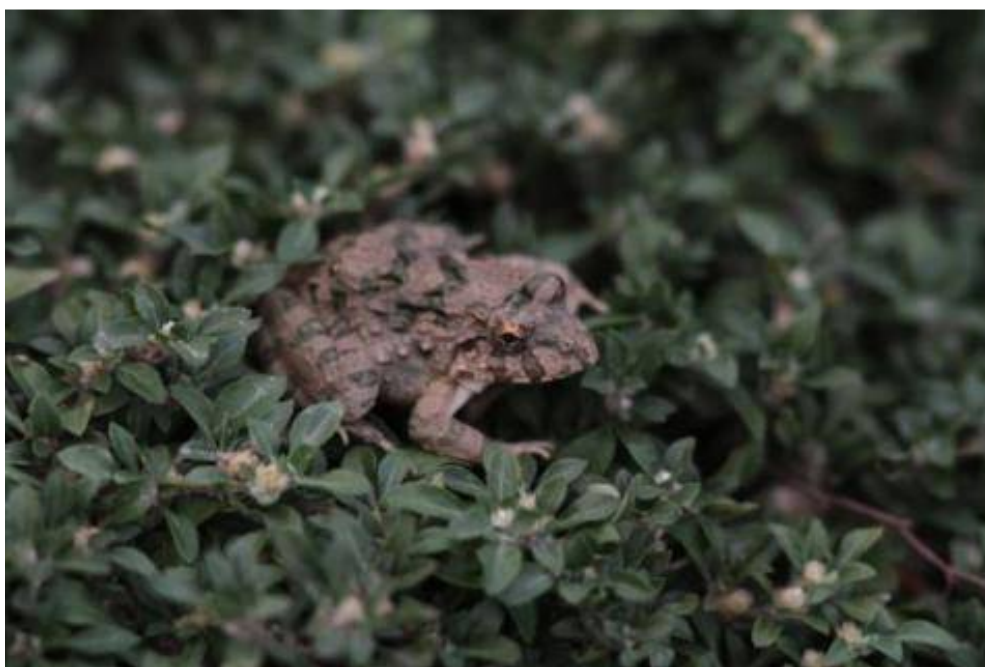


Figure 6.21: Cricket Frog - a common amphibian in the project area

6.4.5. Terrestrial Invertebrates

Wide varieties of terrestrial invertebrates are known to occur in the project area as well as in entire Bangladesh, but there is no information on their diversity and abundance in the literature. The warm and humid climate of the country is favorable to lower organisms, especially the insect and spider fauna. The study area is similar to other areas of the country in terms of having diverse terrestrial invertebrate communities. Detailed invertebrate surveys were not carried out in the study area but a general assessment was made of invertebrate taxa in the area. A number of species of earthworms (eg, *Dendrobena* spp., *Apporectoda* spp., *Lumbricus* spp.) exist in the area. They play a vital role in maintaining the humus of the soil and help the nitrogen and oxygen to penetrate the soil through its holes. There are many species of grasshoppers (order: Orthoptera) that cause a lot of damage to the crops. Other common invertebrates include many species of butterflies, dragonflies, spiders and beetles.

6.4.6. Ecosystem Services

Ecosystem services are the benefits that the people harness from the ecosystems. These may be tangible or intangible. The tangible benefits are direct and possess some sort of physical entity, such as edibles, fiber, construction materials, etc. The intangible benefits

are indirect and need a little thinking to perceive those, such as perennial stream flows, clean water, oxygen supply, climate regulations, microclimatic impacts, and aesthetic values of the landscapes. According to ‘The Economics of Ecosystems and Biodiversity’ (TEEB), ecosystem services can be divided into four categories, which are presented here under.

Provisioning services

These are mainly products obtained from ecosystems. These products will include:

- food (including seafood and game), crops, wild foods, and spices
- raw materials (including lumber, skins, fuel wood, organic matter, fodder, and fertilizer)
- genetic resources (including crop improvement genes, and health care)
- water
- minerals (including diatomite)
- medicinal resources (including pharmaceuticals, chemical models, and test and assay organisms)
- energy (hydropower, biomass fuels)
- ornamental resources (including fashion, handicraft, jewelry, pets, worship, decoration and souvenirs like furs, feathers, ivory, orchids, butterflies, aquarium fish, shells, etc.)

Bangladesh context: Under the Bangladesh context, a few of the examples of such provisioning services rendered by the ecosystems are as under. The water bodies such as rivers, haors, baors, beels, wetlands etc. produce fishes, crabs, shrimps, etc. The agro-eco systems provide the cereals, spices, jute, cotton, vegetables, fruits, etc.. The forest ecosystems provide timber, fuel-wood, game animals, bamboos, canes, poles, etc. which is the provisioning services of these ecosystems.

Project Area Context: The major provisioning services that are provided by the ecosystems in the Project Influence Area (PIA) are:

- The agro-ecosystems (agricultural areas) provide rice, wheat, oil seeds, spices, fruits, and jute.
- The freshwater ecosystems provide clean ground water and surface water that are used for drinking and irrigation purposes. The water bodies such as the rivers, beels, ponds, wetland areas, etc. provide fishes, crabs, shrimps
- Raw materials obtained from this ecosystem include bamboos, fruits, medicinal plants, timber and fuel-wood

Regulating services

Regulating services are the “benefits obtained from the regulation of ecosystem processes”. These include:

- carbon sequestration and climate regulation
- waste decomposition and detoxification
- purification of water and air

- pest and disease control

Bangladesh context: The forest ecosystem in Bangladesh extended over 17 percent of the country transpires out huge quantities of water to the atmosphere. This water has a significant contribution in the rain fall at least on regional context. It is known that the North Western region of the country receive less rain fall than the South Eastern part of the country, which has some relation with the regional ecosystem variability, especially with respect to tree cover. The Barind tract of Bangladesh gets cooler during the winter months than the Chittagong area. In a small country like, this sort of climatic variability refers to the climate regulatory aspects of its ecosystem services.

Bangladesh in general, is tropical and receives a reasonable quantity of rain fall. These features of the ecosystems of the country facilitate waste treatment as the regulating services of its ecosystems.

Bangladesh is endowed with the world largest contiguous mangrove forest, the Sundarban. The cyclone that lashed over Chittagong (non-Sundarban) area on 12 November 1970 had a speed of 224 km per hour and had a death toll of 0.5 million lives. Another cyclone ‘SIDR’, having a speed of 210 to 230 Km per hour, hit Sundarban first and then passed over the human habitations on November 15, 2007, had a death toll of 3363 numbers of human lives. The **SEALS** project (being implemented by the Forest Department) document has revealed that the intangible benefit of Sundarban, only with respect to the saving human lives, is about 8 billion euro. Sundarban as a “buffer zone” in the context of ‘regulating services’ of ecosystem is providing this intangible benefits from this given ecosystem.

Project Area Context: In the project influence area the rural agricultural practices, in many locations have adopted agro-forestry, wherein tree species have been planted especially along the boundary of the agricultural plots. These trees through evapo-transpiration cause an impact on the climate regulation. Besides these the project area has large water bodies, which have some role on climate regulation at local level. The ecosystems in the project area have the biodegrading capability, which helps natural waste treatment. The flowing rivers in the project areas also help to remove the wastes downstream.

Support Services

Ecosystem services are necessary for the production of all other ecosystem services. These include services such as nutrient recycling, primary production and soil formation. These services make it possible for the ecosystems to provide services such as food supply, flood regulation and water purification.

Bangladesh context: The nutrient cycling is a universal phenomenon for almost all of the natural ecosystems in Bangladesh. This prevails not only in hill forest but also in sal forest, fresh water wetland forest, mangrove forest, etc. Besides these most of the water bodies (except Buriganga) this sort of nutrient cycling is there. Biologically Mediated Habitats such as mangroves (Sundarban, coastal afforestation areas,) fresh water forests, such as Ratargul reserved forest (in Sylhet district), Tamguar haor in Sunamgonj district, etc. provide the support services by providing breeding and nursery grounds for large fish population of variety of species.

Proejct Area Context: The project influence area posses many small rivulets that connect the Brahmanputra river with inland beels, depressions that retain water especially

during the dry periods. These water bodies will act as spawning grounds for the fish and act as migratory routes for the fish from river to floodplains.

Besides these the leaf chlorophyll in the project implementation area, through the process of photosynthesis continuously using the carbon dioxides from the air and releasing oxygen. This service of the existing ecosystems in the project area is maintaining the air quality. The organic matter in the upper layers of the soil is enhancing its water holding capacity of the existing ecosystems and thereby a better water regime. The roots of the aquatic plants of the existing ecosystems are holding the water pollutants and thereby enhancing and maintaining the quality of the surface water. In addition, the vegetation covers also somewhat regulate the natural hazards such as high windspeeds, erosion, etc. Some of beetles, especially ‘lady bird beetle’ commonly seen in the ecosystems of the project area, feed on many vegetable pests of which aphids are common.

Cultural services

Cultural services of ecosystems refer to nonmaterial benefits people obtain from ecosystems through spiritual enrichment, cognitive development, reflection, recreation, and aesthetic experiences. These include:

- cultural (including use of nature as motif in books, film, painting, folklore, national symbols, architect, and advertising)
- spiritual and historical (including use of nature for religious or heritage value or natural)
- recreational experiences(including ecotourism, outdoor sports, and recreation)
- science and education (including use of natural systems for school excursions, and scientific discovery).

Bangladesh context: The Dublar Char ecosystem, under the Sundarban (Khulna), provides the ecosystem services which are of the type of “cultural services”, by hosting a colorful Puja, which attracts a large number of tourists. Bangladesh has about 37 Protected Areas. Most of these attract tourists from the whole country, whereas Sundarban attract a sizable number of foreign tourists as well.

Project Area Context: Jamuna and its charland ecosystem is a natural scenic spots with lot of recreational value. Charland ecosystem of project area plays an important role by allowing thousands of migratory birds to visit the ecosystem. This phenomenon enhances the biodiversity values of the ecosystem and enhances its eco-tourism values, which may even generate revenues. The other attraction in the project area is presence of globally endangered ‘Ganges River Dolphin’.

6.4.7. Threats to Ecosystem

Both the terrestrial and aquatic ecosystems of the project area face formidable anthropogenic threats. Excessive and uncontrolled use of various agrochemicals is the biggest threat to the local ecosystems. Moreover, there are reports of disease outbreaks, human-wildlife conflict and pollution.

6.4.8. Use of Agrochemicals

In the terrestrial ecosystems of the project area, particularly in the agricultural lands, many pesticides, fertilizers (such as urea) and growth hormones are used indiscriminately in the agricultural fields. All these chemicals are incorporated to the food chain and are gradually deposited to the higher trophic level through biological magnification. As a

consequence, not only the local wildlife, but also the humans are suffering from adverse effects of these agrochemicals.

6.4.9. Potential Vectors of Diseases

Many birds are known to serve as vectors of highly pathogenic H5N1 and some other contagious diseases that can be transmitted to humans with fatal consequences. On the other hand, Nipah Virus (NiH) is known to be carried by fruit bats and is transmitted to humans through the date juice or fruits, contaminated by bats, that are consumed by people. Moreover, anthrax outbreaks to cattle are occasionally reported. The germs can be transmitted through the wild animals that feed on the carcass of infected cattle.

6.4.10. Other Threats

In the project area there are many reports of human-wildlife conflict. People kill snakes, whether they are poisonous or not, because of the innate fear for snakes. Poisonous snakes (particularly cobras and kraits) are responsible of deaths of some people every year. Similarly, Golden Jackal, Jungle Cat and Common Palm Civet are killed by people due to the perception that these animals kill and eat a lot of domestic chicken and ducks. They do kill some, but more often they kill the rodents that are very harmful to crops.

The Ganges River Dolphin is often killed accidentally in the fishing nets, particularly in illegal gill nets (see **Figure 6.22**). The fat of the dolphin is believed to have the power to cure pain (which has no scientific basis), so there are people to buy dead dolphins. Even the meat is used as baits for large fish and crabs. Since it is rather difficult to purposely kill dolphins, and it is more gainful to catch fish than to kill dolphins, people usually do not kill dolphins purposely.



Figure 6.22: Ganges River Dolphin accidentally killed by fishing net in project area

6.5. Fish and Fisheries

6.5.1. Summary of the fish and fisheries baseline

The Jamuna is an important source of fresh water fish in Bangladesh. In a braided river like Jamuna, fish favorable environment generally exists around the river banks, braided channels, scour hole, deep clear water, and near shallow chars. The river has about 220 km long embankment along the right bank and other structures such as Bangabandhu Bridge, hard points, spurs and revetments (hard and soft) which play an important role in shaping out the characteristics of different fish habitats dependent on the Jamuna river. Both capture and culture fisheries types are exist in the study area. Among capture fisheries habitats main river channels, canals (natural and manmade khals), connected seasonal wetlands (*Beel*), associated flood plains, streams/creeks in riverine islands and embayments (*Kole*) are important.

Total fish habitat area (in ha) of the study area is about 54,987 ha. Besides, about 56 ha culture ponds found in the study area. Wetlands and canals at the country side and embayments in the charlands are playing major role in sustaining the fish production of the Jamuna River. These habitats facilitate food and shelter grounds of fishes, most of which have been formed due to the complex hydro-morphological characteristics of the river. Others rivers that exist in the study area are Bangali river, Ichamati river, Hurasagar river, Ghagot river, Manosh river, Alai river, Dhudkumar river and Teesta river which are connected either directly or through different canals with the Jamuna river forming a fish movement network in the entire study area. The eddy counter-current system at the junction of two rivers (tributary and main river) is an ideal place for fish assemblages. The confluences are also the passageways for upstream fish migration. The study area also has numerous seasonal and perennial beels/wetlands, some of which are connected with these rivers through the internal stream networks. Beels act as feeding and breeding grounds for many riverine species. However, beels do have a residential fish population. Besides, a considerable amount of seasonal floodplain area found within the study area.

Annual total fish production of the study area has been estimated as 8501.92 metric ton. River contributes the largest share of this production followed by floodplain, beel and Kole. Fish production from canals/streams is insignificant as most of those are either dried up during peak dry season or remain closed by flood control structures. Hilsa occupied about 27 percent of Jamuna catch. Other major species of fish catch in Jauma are major carps and cat fishes (about 1 percent each), and shrimps-prawns (4 percent). However, fish production of the Jamuna river has been declining continuously until recently. Fish production was decreasing because of increased fishing pressure and a decrease in the extent of floodplain habitats because of the construction of flood control, drainage and irrigation systems, and the consequent obstruction of movement of fry and fingerlings from rivers.

More than 3500 fishermen were identified during the catch assessment survey along the right bank. Fishing is one of the available livelihood options for most of the landless people of the study area. The more people become landless due to river bank erosion they loss their traditional income earning sources and turned into fishermen. A total of about 1800 fishing crafts were found during catch assessment survey.

Huge number of stagnant water bodies in chars and river channels support a habitat of rich fish biodiversity. Rahman and Akhter (2007) identified 156 fish species of which, 89 are commercially important and 53 are rare in the river. Jamuna river is renowned for its

high diversity of the small indigenous fish species (SIS). Large Hilsa is only available up to Sirajganj. Out of 54 threatened fishes of the country 29 were found in the study area during field investigation. Six principal carp spawn collecting sites are available along the Brahmaputra-Jamuna mainly on its right bank. Carp spawn collection has been decreasing remarkably over the last three decades. Other areas of conservation significance in the Jamuna river found during the field survey are Simlar kole, Mothiar kul/ Pachthakuri kole, Pukuria kole, Sariakandi kole, Boishakhi kole, Chunia para kole, Taltola kole and Kazlar kole. Distance from the project RoW of these areas is ranges from 0.5-4.0km. Besides, Department of Fisheries (DoF) made several fish sanctuaries in the countryside most of which have no existence.

The major migratory fish of the Jamuna is Carps, Cat fishes and Hilsa. Hilsa migrates into Jamuna during March-May from Bay of Bengal through the Meghna and the Padma. Carp fishes migrate upstream and laterally to the inundated floodplains adjacent to the river channel in the late dry season or early rainy season in order to spawn in the nutrient-rich waters. The eggs and larvae of these species drift downstream and enter the floodplain with the floodwater, where they feed on the developed plankton. At the end of the rainy season, the adults and young escape/migrate to the main river channel in order to avoid the harsh conditions of the floodplain during the dry season. The Brahmaputra stock of carp fishes is the largest stock in Bangladesh. Upstream migration of adult major carps in the Jamuna/Brahmaputra River starts in March, coinciding with the gradual rise of water level. Spawning starts in May, with the onset of the Southwest monsoon, and continues until the end of July. Connecting canals between main rivers and other water bodies are vital for maintaining successful fish migration at different seasons. Field survey has identified five migration routes of the priority area are as follows: i) Jamuna to Icamoti river through Baliaghugri regulator; ii) Jamuna to Bangali river through Sariakandi fish pass; iii) Jamuna to Dauli beel to Bangali river through Antarpura regulator; iv) Jamuna to Manos river through proposed Kamalpur fish pass; and v) Jamuna to Bangali river via Kutubpur khal through proposed Kutubpur fish pass. Among these five, Sariakandi fish pass is now almost silted. Other four fish migration routes are partially obstructed due to the existing regulators/BRE. The embankment along the right bank of Jamuna river acts as barrier and has disconnected its large area of floodplain since 1965, which brought changes in the natural ecosystems dependent on the river hydrology that resultant great loss of biodiversity and natural resources, hence livelihood options.

6.5.2. Jamuna River - A suitable habitat of fresh water fishes

The Jamuna is a large braided river having a length of 260km in Bangladesh with an average width of 11.8km. The annual average flow is 20,000 m³/sec with a maximum estimated discharge of 100,000 m³/sec. The average flood water slope of the river is 7.5 cm/km and the average median size bed material is 0.20mm (CEGIS, 2009). It is an important source of fresh water fish in Bangladesh. Braided nature of the river provides suitable fish habitat as the typical fish assemblage in a river requires a high variability of depth, flow velocity and substrates. The high species richness and diversity in braided rivers can be explained by small-scale habitat mosaics encompassing aquatic habitats as well as riverine forests (**Figure 6.23**), and by multiple sub-surface exchange areas (Tockner et. al., 2006). Braided channels were also shown to provide more favorable shelter and nursing conditions for fish larvae and juveniles by mitigating high velocities during floods, by maintaining relatively shallow areas of flow, and by significant adjustments in the thermal region (Sukhodolov et. al., 2009).

The fish habitats of the Jamuna reflect a combination of sedimentology, depth and velocity associated with the organization of river bedforms and morphologies. Jamuna also has huge sediment loads coming from upstream. Its sediment has high organic contents which makes the river suitable for fishes (IWFM, 2012). The Jamuna has a severe bank erosion problem and the eroded banks and scour holes are also good habitats for the adult fishes. According to Sarkar and Bain, 2007 fish fauna of the Jamuna river prefer both erosional and depositional channel habitats with depths, substrates, and current velocity. In a braided river like Jamuna, fish favorable environment exists around the eroded bank, scour hole, deep clear water, near shallow sand bar and some other places. Average depth of the river ranges from 60 to 90 feet is common in rainy season and decreased to average 40 to 50 feet in dry season which is favored by large fishes. River water is always colder than the surrounding weather, so it supports suitable habitats for different fishes. All these make the Jamuna a unique habitat for fish regeneration.



Figure 6.23: Dense shrubs along the banks of the Jamuna river chars–preferred feeding ground for fish offsprings

The river has about 220 km long embankment along the right bank and other structures such as Bangabandhu Bridge, hard points, spurs and revetments (hard and soft) which play an important role in shaping out the characteristics of different fish habitats. However, for the construction of the different riverine structures the fish of the river decline day by day. Tsai and Ali (1985) carried out a study on open water carp fisheries management. They recorded a decline in Padma, Brahmaputra and Upper Meghna stocks of major carps. According to them, the reasons for decline were construction of embankments, sedimentation and over fishing for Brahmaputra stock.

6.5.3. Fish habitat

6.5.3.1. Type, area and distribution

Both capture and culture fisheries types are exist in the study area. Among capture fisheries habitats main river channels, canals (natural and manmade khals), connected seasonal wetlands (*Beel*), associated flood plains, streams/creeks in riverine islands and embayments (*Kole*) are important. Average depth of river channels is 10-15 meter, canals

3-4 meter, embayments 2-7 meter and wetlands 1-4 meter respectively. Total fish habitat area (in ha) of the study area is about 54,987.42 ha, of which 68 percent rivers followed by flood plain (21 percent), beel (6 percent) and Kole (5 percent) as given the **Table 6.5**. Wetlands and canals in the country side and embayments in the charlands are playing major role in sustaining the fish production of the Jamuna River (**Figure 6.24**). These habitats facilitate food and shelter grounds of many riverine fishes. A total of 56 ha culture ponds found in the study area. Upazila wise distribution of different fish habitats is given in **Table 6.6**.

Table 6.5: Fish habitat in study area (in ha)

Fisheries Type	Fish Habitat	Area (ha)		
		Priority Zone (50km)	Remaining Zone (132km)	Project Area (182km)
Capture	River	12652.91	24655.81	37308.72
	Canal (both natural and manmade khals)	91.30	89.00	180.30
	Beel	1289.00	2239.20	3528.20
	Flood plain	3917.50	7454.80	11372.30
	Embayment (Kole)	719.40	1823.00	2542.40
	Sub-total	18670.11	36261.81	54931.92
Culture	Pond	20.90	34.60	55.50
	Sub-total	20.90	34.60	55.50
Total		18691.01	36296.41	54987.42

Source: Field investigation, September 2014, IUCN

Table 6.6: Upazila wise distribution of the fish habitats within the study boundary

Zone	Upazila/District	Habitat type	Area (country side) ha	Area (river side) ha	Total area (ha)
Priority zone	All	River	1832.92	10676.50	12509.42
	Sub-total		8459.55	28176.84	36636.40
Priority zone	Sirajganj Sadar	Canal	-	0.60	0.60
		Beel	19.00	-	19.00

Zone	Upazila/District	Habitat type	Area (country side) ha	Area (river side) ha	Total area (ha)
		Flood plain	44.30	-	44.30
		Embayment (Kole)	-	342.70	342.70
		Pond	3.60	1.00	4.60
		Total	66.90	344.30	411.20
	Kazipur, Sirajganj	Canal	52.90	-	52.90
		Beel	890.00	-	890.00
		Flood plain	2500.00	-	2500.00
		Embayment (Kole)	-	128.00	128.00
		Pond	3.70	1.20	4.90
		Total	3446.60	129.20	3575.80
	Dhunat, Bogra	Canal	20.00	-	20.00
		Beel	80.00	-	80.00
		Flood plain	312.50	10.00	322.50
		Embayment (Kole)	56.50	-	56.50
		Pond	3.30	2.30	5.60
		Total	472.30	12.30	484.60
	Sariakandi, Bogra	Canal	3.50	14.30	17.80
		Beel	300.00	-	300.00
		Flood plain	1050.70	-	1050.70
		Embayment (Kole)	-	192.20	192.20
		Pond	4.60	1.20	5.80
		Total	1358.80	207.70	1566.50
	Total (priority zone)		7177.52	11370.00	18547.52

Source: Field investigation, September 2014, IUCN

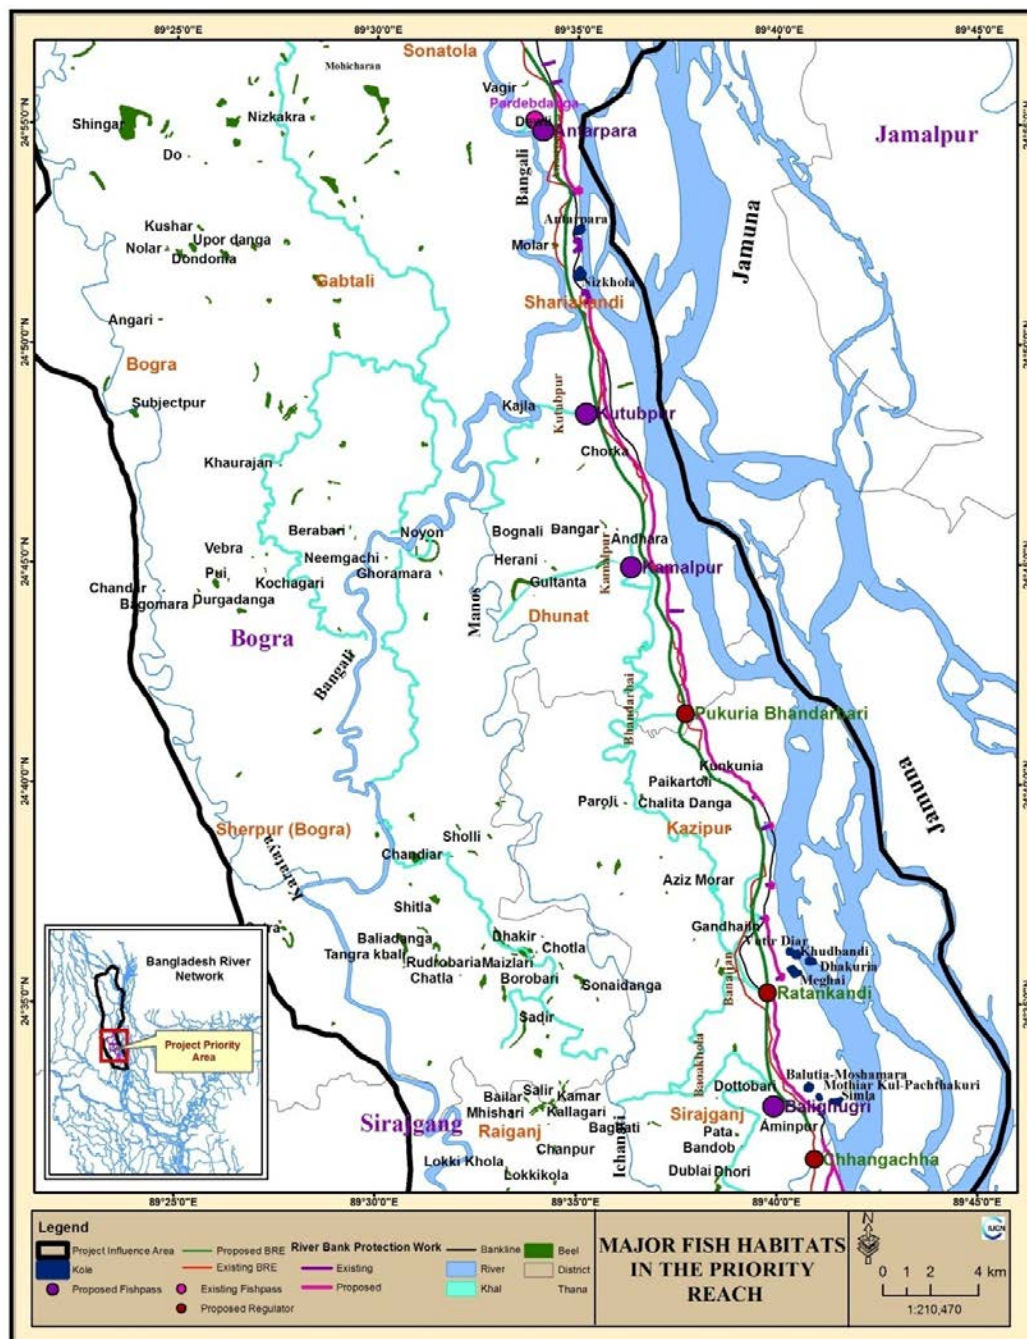


Figure 6.24: Location of the major fish habitats in the Study Area (source: IUCN, 2014)

6.5.3.2. Fish habitat characteristics of the Jamuna River

As shown earlier that different types of habitats exist in the Jamuna River most of which have been formed due to the complex hydro-morphological characteristics of the river. Each of those has an identical hydraulic profile for which fish community structure is different from one to another, those are: main channel, second level channel, third level

channel, embayment (*Kole*), charland channel, bankside and floodplain (in chars). A total of 149 chars were identified during the field investigation, of which 55 chars fall under priority area. Most of these chars and associated river channels form various kole (embayment) some of which are permanent in nature. **Figure 6.25** (IWFM, 2011) shows the sub-habitats of Jamuna river along the Sirajganj Sadar Upazila. One of the authors of this report was also a co-author of the IWFM, 2011 study on the fish habitat profiling of the Jamuna River.

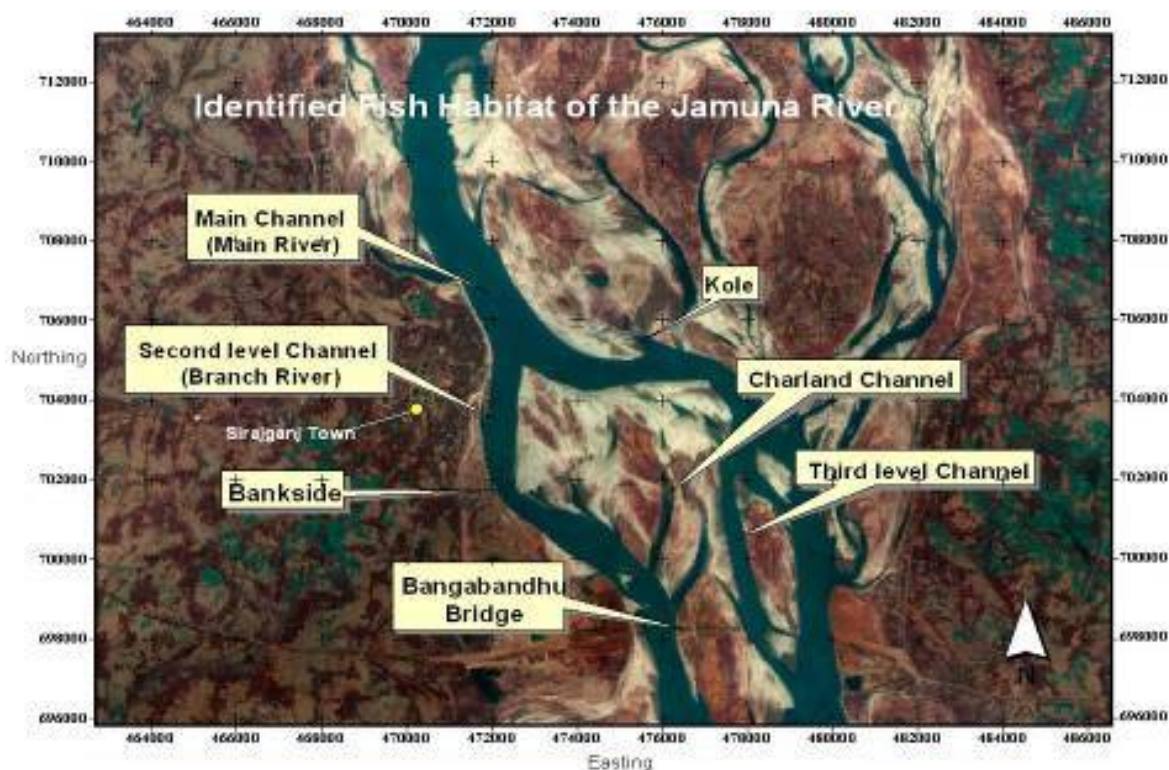


Figure 6.25: Different fish sub-habitats of the Jamuna River (Source: IWFM, 2011)

Hydraulic profile of these important fish sub-habitats of Jamuna river was also prepared during the same study and is furnished in the Beline report under a separate cover. Fish habitats of the priority zone as well as remaining zone of the Jamuna river got same hydraulic profiling which favors by different fishes.

6.5.3.3. Characteristics of other fish habitats of the study area

The eddy counter-current system at the confluence of Jamuna with its tributaries is an ideal place for fish assemblages. Bangali river, Ichamati river, Hurasagar river, Ghagot river, Manosh river, Alai river, Dhudkumar river and Teesta river which are connected either directly or through different canals with the Jamuna river forming a fish movement network in the entire study area. Boruah and Biswas (2002) recorded 77 fish species from the confluences of these tributaries of the Upper Brahmaputra river. The confluences are also the passageways for upstream fish migration.

The study area also has numerous seasonal and perennial beels/wetlands, some of which are connected with these rivers through the internal stream networks. Beels of the Brahmaputra basin are weed infested shallow water bodies temporarily or permanently

connected with the main river. Beels act as feeding and breeding grounds for many riverine species. However, beels do have a residential fish population. Besides, a considerable amount of seasonal floodplain area found within the study area which remains inundated for 1-4 months/year with average depth 1-4 ft. Aquaculture practice found comparatively lower in the study area than other parts of the country, mostly because of recurrent flooding. Around 50 percent of the ponds found derelict in the project area. Location of different fish habitats and their profile generated during field investigation is furnished in **Table 6.7** and **Annex C**.

Table 6.7: Upazila wise name and location of different fish habitats of the study area

Zone	Upazila/District	Habitat type	Name/Number
Priority zone	Sirajganj Sadar	Canal (natural and manmade)	WAPDA Khal, Doi Vanger khal, Baliaghugri khal, Bahuka khal
		Beel/floodplain	Aminpur beel, Joynagar beel, Charkhada, Chatiantolir beel, Ghuria beel, CNB Beel
		Embayment (Kole)	Simla kole, Mothiar kul - Pachthakuri, Balutia-Moshamara
		Pond	62 no.
	Kazipur, Sirajganj	Canal (natural and manmade)	Halot khal, Meghai khad
		Beel/floodplain	Paikartoli beel, Chalita danga beel, Vhut baria beel, Kachihara beel, Pagol kandi beel
		Embayment (Kole)	
		Pond	88 no.
	Dhunat, Bogra	Canal (natural and manmade)/river	Manos river, Madhob Danga, Shimul bari khal
		Beel/floodplain	Jagiar beel, Bera danger beel, Houra khali beel
		Embayment (Kole)	Pukuria, Sariakandi, Shamol bari, Baniajan, Adhanagar, Boishakhi, Chunia para
		Pond	99 no.
	Sariakandi, Bogra	Canal (natural and manmade)	Kata khal, Kuripara canal, Shalukar canal, Char bati canal
		Beel/floodplain	Dauli beel, Vakir beel, Bera beel, Dikdar beel, Dighol kandi beel, Satbilla beel, Kalaihata beel, Burungir beel, Gojariar beel
		Embayment (Kole)	Antarpara kole, Nich Kola, Khurda boloi, Maiz bari, Taltola, Kazlar kole, Gobindapur, Nolcia, Beragram, Holdia
		Pond	95 no.

Source: Field Investigation, IUCN Bangladesh, 2014.

6.5.4. Fish Production

Annual total fish production of the study area has been estimated as 8501.92 metric ton of which river contributes the largest share (34 percent) followed by floodplain (27 percent), beel (22 percent), kole (16 percent) and pond culture (01 percent) (**Table 6.8**). Fish production from canals/streams is insignificant as most of those are either dried up during peak dry season or remain closed by flood control structures. Unlike other areas of the country, bulk of the fish production is coming from open water or capture fisheries sources as opposed to fish cultures.

Table 6.8: Annual fish production of the study area

Fisheries Type	Fish Habitat	Annual Production (tonnes)		
		Priority Zone (50km)	Remaining Zone (132km)	Project Area (182km)
Capture	River	1138.76	1725.91	2864.67
	Canal (both natural and manmade khals)	5.48	4.94	10.41
	Beel	792.74	1101.22	1893.96
	Flood plain	781.29	1538.67	2319.96
	Embayment (Kole)	463.84	857.52	1321.36
	Sub-total	3182.10	5228.25	8410.36
Culture	Pond	32.98	58.58	91.56
	Sub-total	32.98	58.58	91.56
Total		3215.08	5286.83	8501.92

Source: Field investigation, September 2014, IUCN

However, fish production of the Jamuna river has been declining continuously until recently (trend analysis of the FRSS time series data 1984-2012). Annual total fish production decreased approximately 3,200 tonnes in 30 years. A sharp decline of fish production took place during the 80's, a trend that continued until the year 2004-05. After that in last few years fish production has been improving. More specifically, increasing trend of fish production found along the bank of Sirajganj, Gaibandha and Kurigram districts, whereas decreased in Bogra. On the other hand, fish production along the left bank is consistently declining since early 80s. Fish production was decreasing because of increased fishing pressure and a decrease in the extent of floodplain habitats because of the construction of flood control, drainage and irrigation systems, and the consequent obstruction of fry and fingerlings from rivers. Further declines of fish production are anticipated when all the planned water control projects are completed. Increasing trend of fish production in recent times resulting from enforcing fisheries regulations by DOF, banning fishing during breeding season, improving resources management and establishing sanctuaries.

Among the upazilas at the right bank of the Jamuna river, Kazipur of Sirajganj, Sonatala and Sariakandi of Bogra are the most productive zone due to good connectivity between the main river and its floodplains. According to Lasne *et al.*, 2007; Leigh *et al.*, 2010 and Arthington & Balcombe, 2011 the single most important factor for the persistence of the fish

assemblage in an isolated wetland is the flow connection between the wetland and a main stream. Upazila wise fish production by habitat types is furnished in **Table 6.9**.

Table 6.9: Annual fish production status of different upazilas of the study area

Zone	Upazila/District	Habitat type	Production (tonnes)
Priority zone	All	River	1138.76
Priority zone	Sirajgang Sadar	Canal	0.04
		Beel	11.69
		Flood plain	6.65
		Embayment (Kole)	222.76
		Pond	6.90
		Total	248.02
	Kazipur, Sirajgang	Canal	3.17
		Beel	547.35
		Flood plain	500.00
		Embayment (Kole)	81.92
		Pond	7.84
		Total	1140.28
	Dhunat, Bogra	Canal	1.20
		Beel	49.20
		Flood plain	64.50
		Embayment (Kole)	36.16
		Pond	8.96
		Total	160.02
	Sariakandi, Bogra	Canal	1.07
		Beel	184.50
		Flood plain	210.14
		Embayment (Kole)	123.01
		Pond	9.28
		Total	528.00
	Total (priority zone)		3215.08

Source: Field investigation, September 2014, IUCN

6.5.5. Fishing Effort

6.5.5.1. Number of fishermen

More than 3500 fishermen were found during the catch assessment survey along the right bank. Fishing is one of the available livelihood options for most of the landless people of the study area. The more people become landless due to river bank erosion they loss their traditional income earning sources and turned into fishermen. Hence, overall catch per fisher is declining due partly to the growth in the number of fishing efforts.

6.5.5.2. Fishing pattern

The pattern of fishing along the right bank is found similar to the Padma river with a major peak in the pre-monsoon season (April-July) and a second peak in the post-monsoon season (October-December). This largely coincides with the migratory movements of many fish species, particularly amongst the hilsa, catfishes and cyprinids. Catfishes and major carps are much prominent in Jamuna. Major carps are also key indicators of the Jamuna river system. They were originally a dominant group in the river and floodplain eco-system. They are amongst the most highly regarded of the fish species with respect to commercial value and also for aquaculture.

6.5.5.3. Fishing gears and crafts

An attempt has been made to investigate the fishing gears available in the study area during catch assessment survey. Detail information on the gears specification was also collected in this respect. **Table 6.10** and **Figure 6.26** summarize target fishes and catch per unit effort (CPUE) of different types of fishing gears used in open water fishing. Gill net, long line and cast net got the highest CPUE (2-2.71 kg/hr/gear).

Table 6.10: Fishing gear efficiency

Fisheries Type	Fishing Gears	Target Fish Species	Fish catch per unit effort (CPUE) (Kg/hr/gear)
Capture	Gill net (Phasi jal)	Hilsa and Large Cat fishes (Boal, Rita, Aire, Bagaire)	2.71
	Seine Net/ Ber jal (Kazoli jal)	Kazoli and Mixed SIS*(Baila, Chingri, Poa, Bata, Pabda)	0.13
	Current jal (Mono filament net)	Mixed SIS (Tengra, Puti, Chela, Bashpata, Bele)	0.32
	Lift net (Vesal Jal)	Kazoli and Mixed SIS	0.13
	Push net	Mixed SIS	0.13
	Cast net	Mixed SIS	2.00
	Moi Jal	Mixed SIS	0.13
	Trap (Doair chai)	Mixed SIS	0.13
	Angling	Boal, Chital,Taki,Baim	0.81
	Long line	Boal, Chital,Aire, Guji	2.71

*SIS= Small Indigenous Species

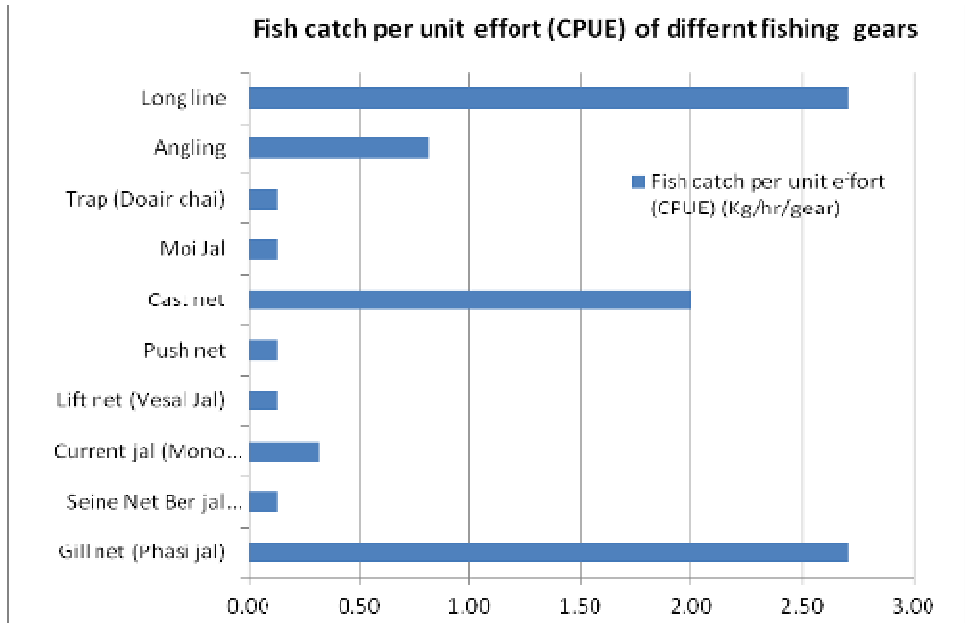


Figure 6.26: CPUE of the different fishing gears

A total of about 1800 fishing crafts were found during catch assessment survey. Some fishing gears like gill nets (for hilsa catch) and seine nets (for mixed fishes) need multiple fishermen for operation. Pictorial view of the fishing crafts and gears are given in the **Figure 6.27**. Operational specification of different fishing gears are furnished in the **Table 6.11**.





Figure 6.27: Different types of fishing gears and crafts of the study area

Table 6.11: Fishing gears and their operational specification

Fishing gears	Total no. of gear	Mesh size (inch)	Length (m)	Fishing depth (m)	Fishermen no. engaged per gear	Average duration/haul (hr)	Average no. of haul/day
Gill net (Phasi jal)	30	12-14	365-950	14-22	8-12	2.5 – 3	3
Seine Net/ Ber jal (Kazoli jal)	55	0.25	90-275	9-15	7-12	2-2.5	3-6
Current jal (Mono filament net)	76	1-2	55-140	0.70-1.83	1-2	3-12	1-2
Lift net (Vesal Jal)	14	0.25-1	4.60-7.31	-	1-2	0.083-0.25	36-144
Push net	8	0.25-0.5	-	-	1	0.033-0.07	15-40
Cast net	16	0.5-1	-	-	1	0.07-0.17	10-30
Moi Jal	6	0.25-1	15-24	5-10	2-4	1.5-3	2-5
Trap (Doair chai)	25	-	-	-	1	3-12	1-2

6.5.5.4. Fishing Season

Hilsa and carps are the dominant species of the Jamuna River. First hilsa fishing starts in June (15th) and continue up to August (15th). Second Hilsa fishing starts in September (15th) and continue up to October (15th). Rest of the time fishermen are mainly engaged in

other fishing. Fishing using Ber jal (Kazli jal) continue for 7 months (November –May). Different fishing traps are generally used by the fishermen during dry season months. The seasonality of major fishing types in different habitats are furnished in **Table 6.12**. Fishing season as per gears operated for hilsa fishing is furnished in **Table 6.13**.

Table 6.12: Fishing seasonality of different habitats

Habitat	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
River	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Canal				✓	✓	✓	✓	✓	✓	✓	✓	
Floodplain				✓	✓	✓	✓	✓	✓	✓		
Embayment (Kole)	✓	✓	✓	✓						✓	✓	✓
Beel	✓	✓	✓	✓						✓	✓	✓

Table 6.13: Crafts and gears use for hilsa fishing

Type of Net	Local Name	Craft used	Nos. crew	Operation Season	Fishing type
Set gill net	Gara jal	Kosa	6-8	Nov-Feb	Gilling & Selective
	Dhara jal	Kosha	4-6	May-Oct	Gilling & Selective
	Daba jal	Kosha	4-6	May-Oct	Gilling & Selective
	Bundhi jal	Dingi	10-15	Jan-May	Gilling & Pocket Selective
Drift gill net	Current jal	Dingi/kosha	2-4	Year round	Gilling & Selective
	Gulti jal	Chandi	8-10	May-Oct	Pocketing
	Kona jal	Chandi	8-10	May-Oct	Gilling & Pocketing
Clap net	Shangla jal	Dingi/kosha	2	Aug-Oct	Trapping
	Kharki jal	Kharki	2	Aug-Oct	Trapping
Seine	Jagat ber	Chandi	40-50	Jan-May	Encircling
	Ber jal	Chandi	30-40	Jan-May	Encircling
Lift net	Khara/Bhesal	Dingi	1-2	Jan-May	Lifting

6.5.6. Fish Biodiversity

Huge number of stagnant water bodies in chars and river channels support a habitat of rich fish biodiversity. Rahman and Akhter (2007) identified 156 fish species of which, 89 are commercially important and 53 are rare in the river. Thousands of fishermen are also dependent on this river. FAP 17 (1995) carried out a catch assessment survey in Jamuna and Padma rivers during March 1993 - February 1994. The study classified the fish species according to their preference of habitat namely riverine, migratory and floodplain resident. The study identified 68 fish species for Jamuna, out of which 22 were riverine, 18 migratory, and 28 floodplain resident. Catches from Jamuna accounted 60 percent of

riverine species, whereas migratory and floodplain resident fish species were equally abundant on the Jamuna comprising 13 percent. Hilsa was the dominant species occupied 31 percent of the catch. The study noted that the number of floodplain species found in the catch during winter highlights the importance of the extensive areas of these large rivers as shelter during a critical period in the hydrological cycle when the area of perennial water on the floodplain is at a minimum. Jamuna river is renowned for its high diversity of the small indigenous fish species (SIS). Some of the fishes like Piyali (Joya) are only now available in Jamuna and its adjacent floodplain (**Figure 6.28**). Large Hilsa is only available up to Sirajganj. A list of abundant species found during the catch assessment survey and determined through FGD in the study area is furnished in the Baseline report that is presented under a separate cover.



Figure 6.28: Small Indigenous Species (SIS) of the Jamuna River

6.5.7. Species of Conservation Significance

260 species of fishes were found in the northwestern region of the country of which 143 belonged to small fishes (Fresh Water Fishes of Bangladesh, 2005). More than 41 species of small fishes are on the verge of vulnerability now. These include: Shankha, Fansha, four varieties of Puti, Khayera, Pabda, Panikoi, Bancha, Milon, Yellow Tengra, Bele, Ganges Pangas fish, Bheda fish, Piyali, and Bou fish. IUCN has made a list of threatened species of different areas of Bangladesh. Based on the red list (2000), species of conservation significance in the Jamuna is given in **Table 6.14**. Out of 54 threatened fishes of the country 29 were found in the study area during field investigation.

Table 6.14: List of species for conservation significance

Scientific name	Local name	Common name	CR	EN	VU
<i>Labeo calbasu</i>	Kalbasu	Black Rohu		√	
<i>L. gonius</i>	Gonia	Kuria Labeo		√	
<i>L. boga</i>	Bangon bata	Boga Labeo	√		

Scientific name	Local name	Common name	CR	EN	VU
<i>L. nandina</i>	Nandil	Nandi Labeo	√		
<i>Cirrhinus reba</i>	Raik, Vagna	Reba			√
<i>Chela laubuca</i>	Lauboka	Indian grass barb		√	
<i>Puntius ticto</i>	Tit puti	Ticto barb			√
<i>P. sarana</i>	Sar puti	Olive barb	√		
<i>Ompok bimaculatus</i>	Kani pabda	Indian Butter Catfish		√	
<i>Ompok pabda</i>	Modhu pabda	Pabdah Catfish		√	
<i>Ompok pabo</i>	Pabda	Pabo Catfish		√	
<i>Clupisoma garua</i>	Gharua	Garua Bacha	√		
<i>Eutropiichthys vacha</i>	Bacha	Batchwa bacha	√		
<i>Bagarius bagarius</i>	Bagghair	Gangetic Goonch	√		
<i>Chaca chaca</i>	Cheka	Indian Chaka		√	
<i>Rita rita</i>	Rita	Rita	√		
<i>Mystus aor</i>	Aor	Long whisker Cat fish			√
<i>M. seenghala</i>	Guizza Ayer	Gaint river catfish		√	
<i>Monopterusuchia</i>	Kuicha	Cuchia			√
<i>Chanda nama</i>	Nama Chanda	Elongated Glass-perchlet			√
<i>Pseudambassis ranga</i>	Ranga chanda	Indian Glassy fish			√
<i>Nandus nandus</i>	Meni	Mud perch			√
<i>Botia dario</i>	Rani	Necktie Loach		√	
<i>Channa marulius</i>	Gajar	Giant snakehead			√
<i>C. gachua</i>	Cheng	Asiatic snakehead			√
<i>Macroglyptothorax aculeatus</i>	Tara baim	Lesser –spiny eel			√
<i>Mastacembelus armatus</i>	Sal baim	Tire-track Spinyeel		√	
<i>Notopterus notopterus</i>	Foli	Grey-Featherback			√
<i>Chitala chitala</i>	Chital	Humped Featherback		√	

CR= Critical Endangered, EN= Endangered, UV =Vulnerable

6.5.8. Area of Conservation Significance

FAP 2 (1991) identified six principal carp spawn collecting sites along the Brahmaputra-Jamuna mainly on its right bank (**Figure 6.29**). Important carp spawn/egg collection stations are Ratankandi, Madhupur, Anterpur, Udakhal, Kutubpur, and Gidari. River areas adjacent to these spawn/egg collection stations are considered as carp breeding grounds of the Jamuna river. Carp spawn collection has been decreasing remarkably over the last three decades (**Figure 6.30**). In the year 2012, total 1514 kg egg/spawn was

collected from different breeding spots of the Jamuna river (FRSS, 2012). Spawn/egg collection status of the year 2012 is given in **Table 6.15**.

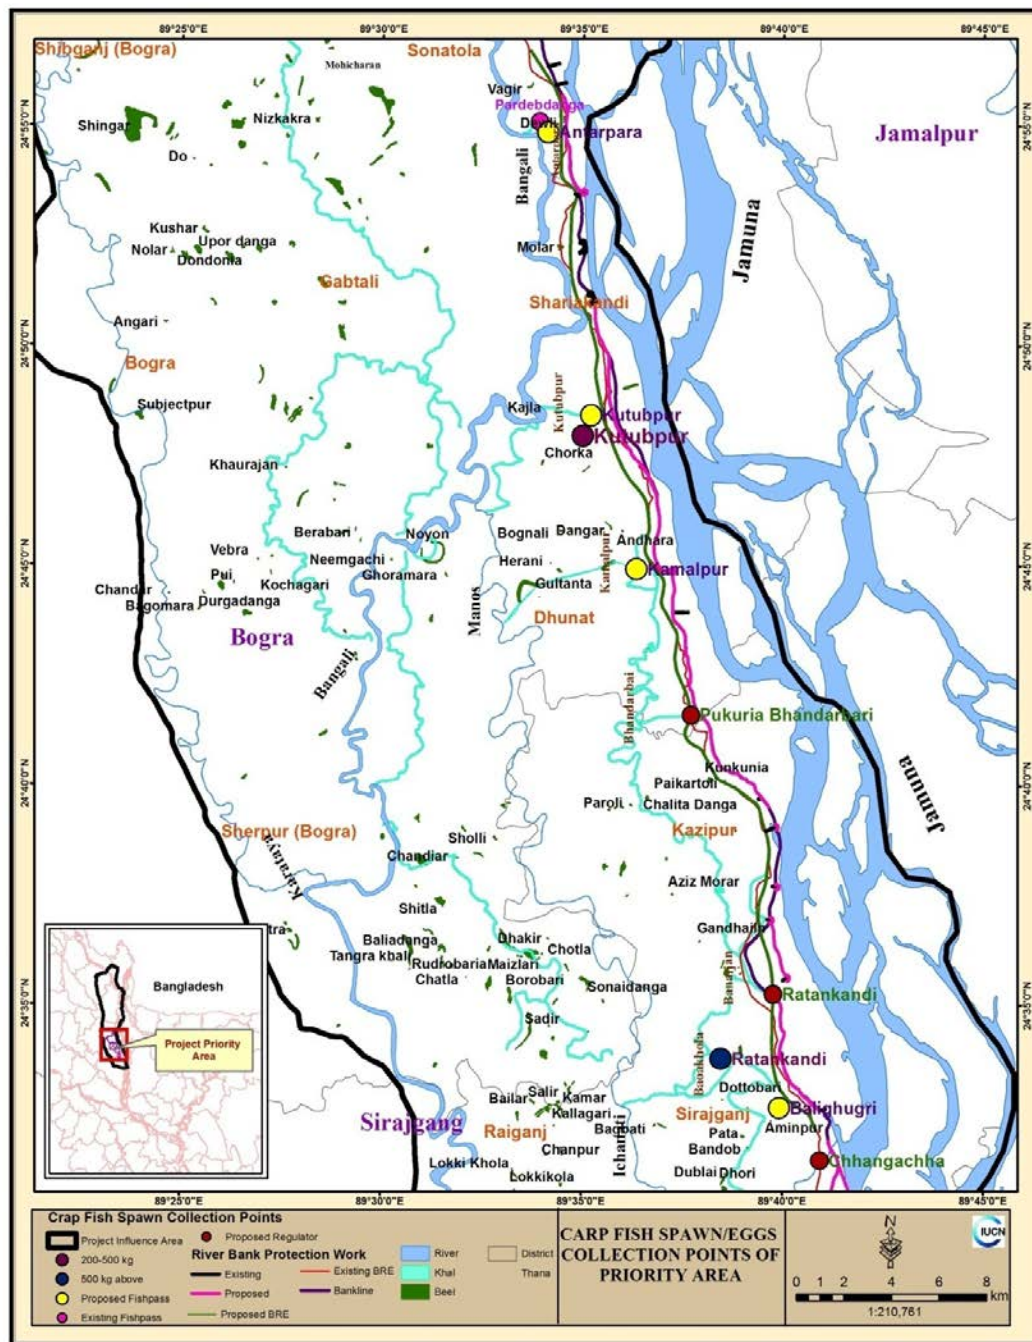


Figure 6.29: Carp spawn collection points of the Jamuna river

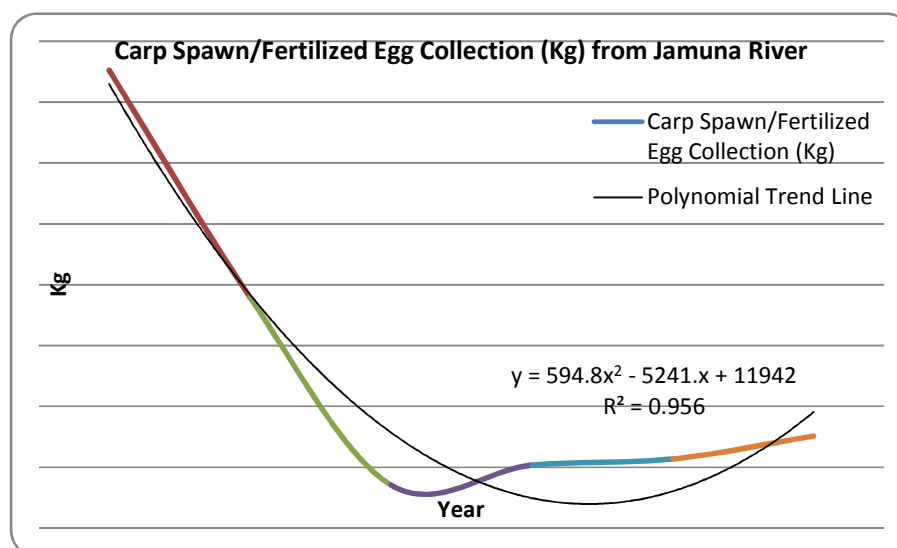


Figure 6.30: Carp spawn collection trend of the Jamuna river

Table 6.15: Carp spawn/fertilized egg collection from Jamuna river in 2012 (FRSS, 2012)

Location	Collection Center	River	Frequency of Spawning Time	Quantity of Spawn/Fertilized Egg Caught (kg)	Sale Rate Tk/kg
Kazipur (Sirajganj)	Singrabari, Khudbandi	Jamuna	1	80	1650
Sirajganj	Vatpiary, Puthiabari, Char Malsapara	Jamuna	2	175	1600
Shajadpur (Sirajganj)	Enayatpur, Sonatali, Hatpachil, Bharakola	Jamuna	1	24	4000
Chauhali (Sirajganj)	Khashpukuria	Jamuna	2	800	1200
Belkuchi (Sirajganj)	Khidramati, Delua, Thakurpara, Jangalia	Jamuna	3	120	2000
Sariakand (Bogra)	Devdango to Sbanbairdo	Jamuna	2	215	1200
Bera (Pabna)	Goghunathpur	Jamuna	3	215	3500
Total				1514	

Note: All the above locations, except Bera, are located in PIA.

The study area has some embayments (Kole) and perennial beels which serve as feeding grounds and provide shelter during over wintering period. Important water bodies mentioned by the fishermen during FGD and field investigation are given in **Table 6.16**.

Table 6.16: Areas of conservation significance (Field Investigation) of the priority area

Name of fish habitat	Area (in ha) and Location	Distance from project RoW
Simlar kole	2.67 ha; Baliaghugri, Sirajganj;	4 km east from proposed Baliaghugri regulator
Mothiar kul/ Pachthakuri kole	3.34 ha; Baliaghugri, Sirajgong;	1.25 km north-east from proposed Baliaghugri regulator
Pukuria kole	6.68 ha; Pukuria, Dhunat, Bogra;	0.75 km east from proposed Pukuria – Vanderbari regulator
Sariakandi kole	0.67 ha; Bogra	0.5 km east from proposed embankment
Boishakhi kole	5.34 ha; Dhunat, Bogra;	1 km east from existing Shamolbaria spur
Chunia para kole	40.08 ha; Dhunat, Bogra;	0.5 km east from proposed Kamalpur regulator
Taltola kole	66.80 ha; Sariakandi, Bogra;	4km east from Sariakandi fish pass, Bogra
Kazlar kole	10.69 ha; Sariakandi, Bogra	2 km east from the proposed embankment

Department of Fisheries (DoF) has established some fish sanctuaries in the study area with the help of local fishing communities to promote sustainable harvesting. The objective of the sanctuaries is to avoid fishing in these sanctuaries during spawning periods. These sanctities have no legal status. **Table 6.17** shows a list of existing fish sanctuaries established by the DoF. **Figure 6.31** shows fish sanctuaries of the study area established by DoF. Most of these sanctuaries are not well managed.

Table 6.17: Existing fish sanctuaries of the study area (Source: DoF)

Name of Sanctuary	Location				Distance from River Bank line (km)	Water body Name	Geo-location	
	Mouza	Union	Upazila	District			Latitude	Longitude
Nizkakra	Sekher Kola	Sekher Kola	Gabtali	Bogra	Jamuna -18.00	Nizkakra beel	24°54'0.93"N	89°23'50.56"E
					Bangali-15.59			
Mohicharan	Ganiarkandi	Digdair	Sonartala	Bogra	Jamuna -8.91	Mohicharan beel	24°56'5.14"N	89°28'43.95"E
					Bangali-6.64			
Bangali	Fulbari	Fulbari	Sariakandi	Bogra	Jamuna -1.42	Bangali river	24°51'7.46"N	89°34'11.60"E
					Bangali-0.58			

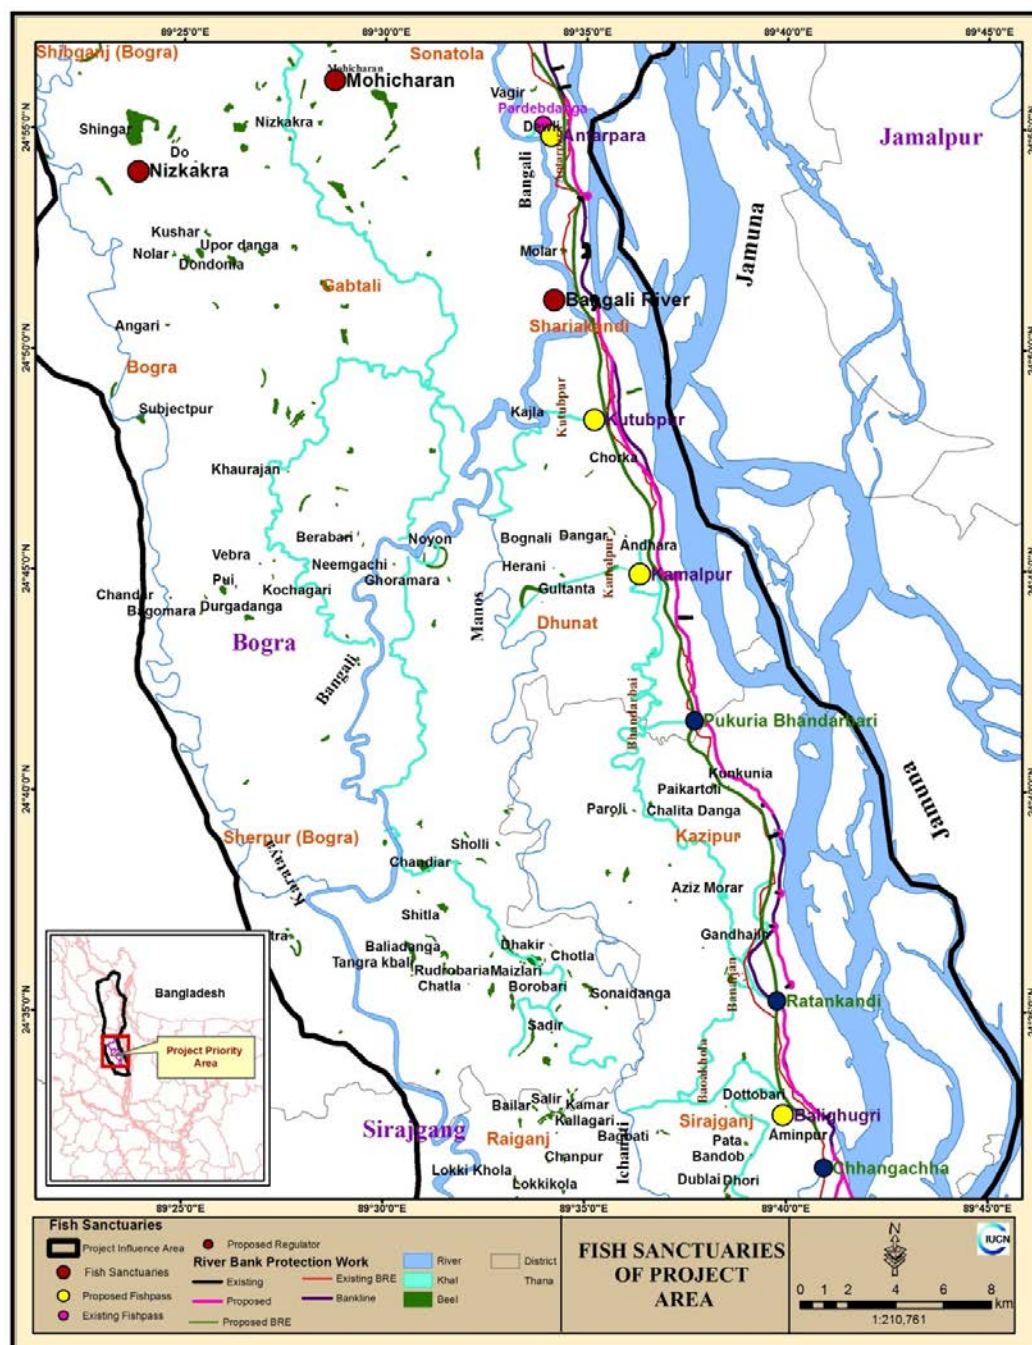


Figure 6.31: Location of the fish sanctuaries of the study area

6.5.9. Fish Migration

Some species of fish remain confined to the riverine water, some species migrate from flood plain to the river mostly for breeding, and again some species migrate to the upper reaches during monsoon season. On the basis of the fish behavior, mainly related to migration and reproduction, the fish species of the Jamuna river can be divided in two groups: “whitefish” and “blackfish” (Sao-Leang and Dom Saveun, 1955). “Blackfish”

species are able to tolerate the de-oxygenated water conditions of dry season floodplain water-bodies and may spend most of their lives in a single water-body. These include species such as snakeheads (Channidae), catfish (Heteropneustidae) and climbing perch (Anabas testudineus). “Whitefish” migrate upstream and laterally to the inundated floodplains adjacent to the river channel in the late dry season or early rainy season in order to spawn in the nutrient-rich waters. The eggs and larvae of these species are drifting downstream and are entering the floodplain with the floodwater, where they feed on the developed plankton. At the end of the rainy season, the adults and young of the year escape/migrate to the main river channel in order to avoid the harsh conditions of the floodplain during the dry season. Migration cycle of the floodplain dependent fishes is shown in **Figure 6.32**.

Migration and spawning of the major carp in Bangladesh was first studied by Tsai and Ali in 1983-85 (Tsai & Ali, 1986). They found that the major carp in Bangladesh were comprised of three stocks: the Brahmaputra stock, Padma stock and the Upper Meghna stock. The Brahmaputra stock is the largest stock in Bangladesh, and its spawning grounds are located in the Southern tributaries of the Brahmaputra river in the Assam Hills and Letha Range, Assam, India (Alikhuni, 1957 and Jhingran, 1991). Upstream migration of adult major carps in the Jamuna/Brahmaputra River starts in March, coinciding with the gradual rise of water level. Spawning starts in May, with the onset of the Southwest monsoon, and continues until the end of July (Azadi, 1985, Shaha and Haque, 1976 and Tsai and Ali, 1986).

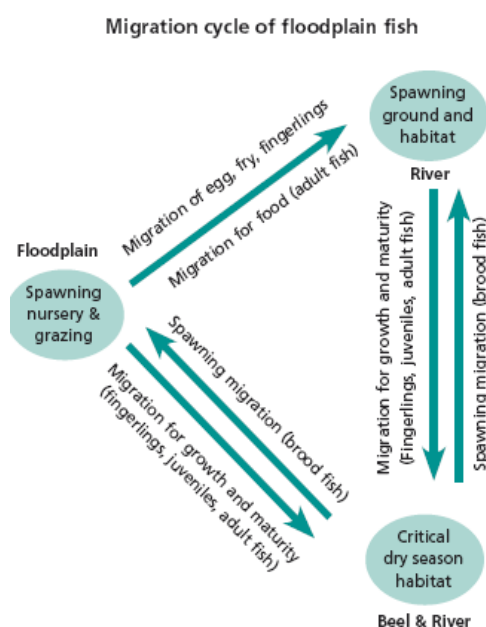


Figure 6.32: Migration pattern of the floodplain fishes of the study area

Connecting canals between main rivers and other water bodies are vital for maintaining successful fish migration at different seasons. Field survey has identified five migration routes (**Figure 6.33**) of the priority area are as follows:

- Jamuna to Icamoti river through Baliaghugri regulator

- Jamuna to Bangali river through Sariakandi fish pass
- Jamuna to Dauli beel to Bangali river through Antarpara regulator
- Jamuna to Manos river through proposed Kamalpur fish pass
- Jamuna to Bangali river via Kutubpur khal through proposed Kutubpur fish pass

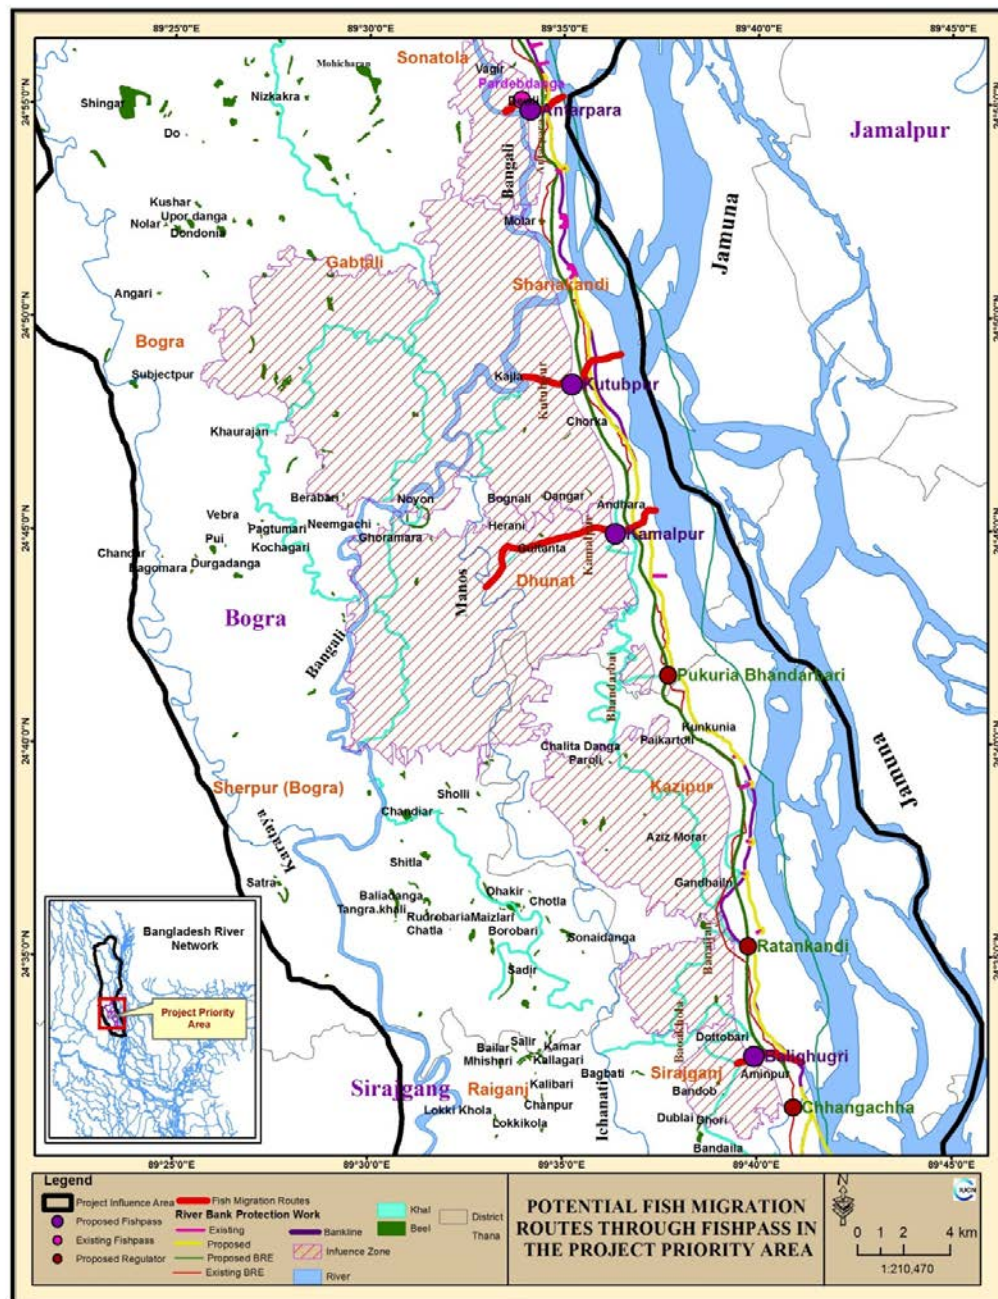


Figure 6.33: Potential fish migration routes through fishpass in the priority area

Among these five, Sariakandi fish pass was built in late 90's to facilitate fingerlings migration into the Bangali river and its adjacent floodplain, which is now almost silted (**Figure 6.34**). Other four fish migration routes are partially obstructed due to the existing regulators/BRE. The regulator had built for only irrigation purpose and not suitable for fingerlings migration into the the floodplain. Basically water velocity and depth are the two controlling factors for effective fish migration through water control structure. Most of the connected khals/streams in the study area are either silted or discontinued in different places which hinder fish migration. Present condition of the khals/canals of the study is furnished in the **Table 6.18**.



Figure 6.34: Sariakandi fish pass (September 3, 2014)

Table 6.18: Present condition of the khals/canals of the study area-potential fish migration routes

Upazila	Name of Khal	Problem	Location related to the existing/ proposed structures
Sirajgang Sadar	Doi Vanger khal	- No connectivity to the countryside. - No existence at the time of consultation as it merged into the Jamuna river	Proposed regulator Baliaghuri
	Balia ghugri khal (Jamuna – Ichamoti River)	Connectivity has been blocked in between Jamuna & Ichamoti River due to the BRE.	Proposed regulator Baliaghuri
	Banaijan Khal (Jamuna- Ichamoti River)	- Need excavation to reduce sedimented condition. - Connectivity with the Jamuna was	Proposed Ratankandi Box Culvert-1

Upazila	Name of Khal	Problem	Location related to the existing/ proposed structures
		destroyed by the BRE.	
	Baoikhola Khal (Jamuna-Ichamoti River)	- Need excavation to reduce sedimented condition. - Connectivity with the Jamuna was destroyed by the BRE.	Proposed Ratankandi Box Culvert-2
	Bahuka khal (Jamuna-Ichamoti River)	Flow was interrupted due to the existing embankment and artificially sedimented by the local people.	A regulator should be Constructed (according to the public opinion)
Kazipur	Halot khal (Jamuna-Ichamoti River)	Flow was interrupted due to the existing ring dam	
Dhunat	Madhob Danga (Jamuna – Beradanga Beel)	Need connectivity to the Jaguria Beel	Proposed Pukuria Vandarbari Regulator
	Shimul bari khal (Jamuna- Jagiar Beel)	- Connectivity with Jamuna was destroyed due to spur - Several Areas were occupied by the local powerful people.	Shimulbari Spur
Sariakandi	Kata khal (Bangali River-Dewli beel)	Need re-excavation for connectivity in between Bangali River and Dewli Beel.	Proposed Anterpara Regulator
	Kutubpur Khal (Jamuna river-Manos River)	- Need Connectivity with Manos river - Need re-excavation	Proposed Kutubpur Regulator

6.5.10. Timing of fish migration


The timing of fish migration is described below.

- 15 March - Broodstock (berried fish) starts migration towards upstream
- 15 April to 30 May - Most of the matured broods complete either partial or full breeding i.e.eggs/spawn, so need connectivity with the adjacent floodplains to facilitate drifting downstream migration.
- 01 to 30 July - Most of the fingerlings enter into the floodplains. After that, only lately recruited spawn/eggs drifted down to the floodplain.

- 15 September to 30 October - Adults and young fishes migrate to the main river channel.

Criteria for fish migration studied by the IWMF, 2011 reveal that flow velocity and water depth play a major role. Depth and velocity preference are also different from species to species. Charts for depth and velocity preference of different kind and age of fishes are furnished in **Figure 6.35**. Most the connected canals of the study area are either silted or encroached and sometime disconnected from its original water source. Hence, the required flow and depth for movement of fishes are not found in almost all the canals. It can be stated that the following threshold value should be maintained in identified migration routes to sustain fish biodiversity.

Fish species found in different velocity regime of the Jamuna river

Common fish species			
			
			
			
	Tengra, Puti, Baila, Baim, Kajoli, Chingri	Rui, Katol, Other common carps	Air, Baghair, Boal, Mrigal Kalbaus
	Low 0 to 0.5 m/ sec	Medium 0.5 to 1 m/sec	High > 1 m/sec
	Velocity		

Fish Species Found in Different Water Depth of Jamuna River

Common Fish species			
			
			
			
	Baila, Puti, Young Baghair, Chingri	Kajuli, Poa, Bacha, Nal Mach, Kaya kata	Hilsha, Ghaira, Air, Baghair
	Low Depth 1 to 15 feet	Medium Depth 15 to 30 feet	High Depth > 30 feet
	Depth of River		

Figure 6.35: Depth and Velocity Preference for Fish (IWMF, 2011)

Other kind of fish migration in Jamua is longitudinal migration of hilsa, an anadromous fish species. Hilsa migrates from Bay of Benal to Meghana – Padama – Jamuna river system for spawning and breeding. Besides the these rivers, hilsa were also abundant in other rivers such as Kanafuly, Feni, Surma, Kusiara, that directly drains to Bay of Bengal (Ahsanullah, 1964, Quereshi, 1968, Haldar et. al. 1992). Hilsa migrates into Jamuna during March-May from Bay of Bengal through the Meghna and the Padma. The range of migration of hilsa in the Brahmaputra River was up to Tezpur, Assam province of India. Migration pattern of the Hilsa fish at different season is furnished in the **Figure 6.36**. It is evident from different sources, that the condition that avails for Hilsa migration is fulfilled the biological requirement (water depth, water flow, velocity, water quality etc.) of other riverine catfishes and carps. During the last decades, a major change in the abundance and distribution of hilsa in the inland waters of Bangladesh has occurred.

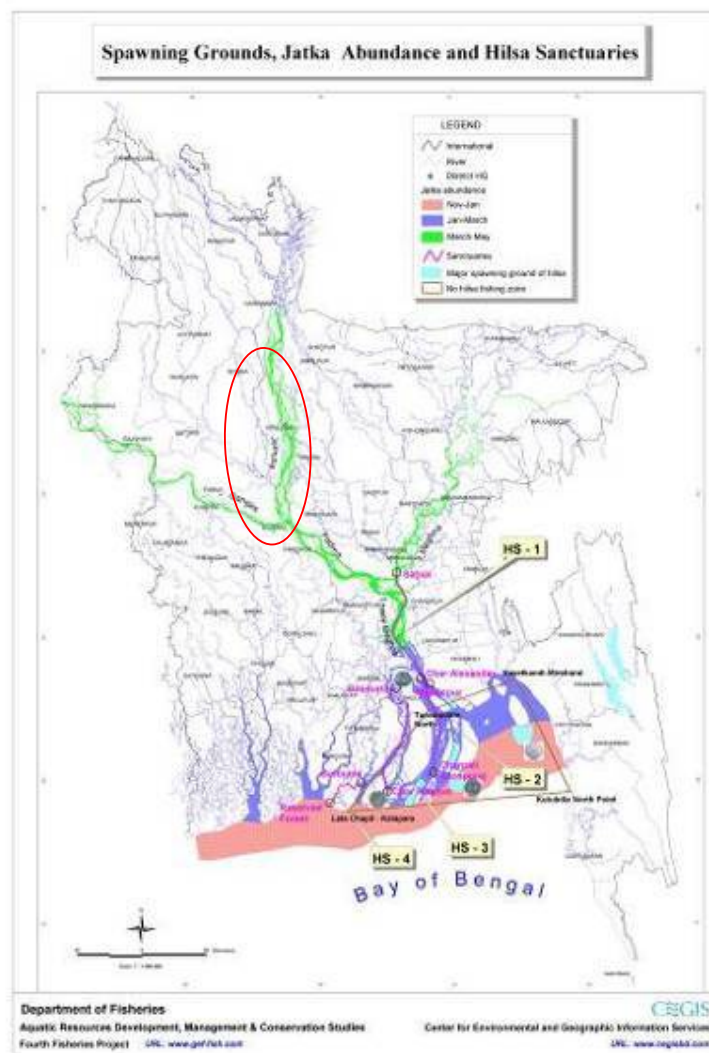


Figure 6.36: Movement of Jatka (Hilsa juvenile) into the Jamuna river (source: FFP, DoF/CEGIS)

6.5.11. Fish catch composition

Hilsa occupied only 27 percent of Jamuna catch. Whereas, miscellaneous fishes comprise the highest 67 percent, major carps 1 percent, cat fishes <1 percent, and shrimps-prawns

4 percent (**Figure 6.37**). Among the principal rivers, considerable amount of major carps (Rui, Catla, and Mrigal) production is coming from Jamuna. Other carps (Ghania, Kalbasu, and Kalia) production is the lowest in this river. Catfish (Rita, Boal, Pangas, Silon, Aor, and Bacha) production is also the highest in Jamuna. Small shrimps are available in almost all rivers, whereas big shrimp production is found comparatively higher than other rivers.

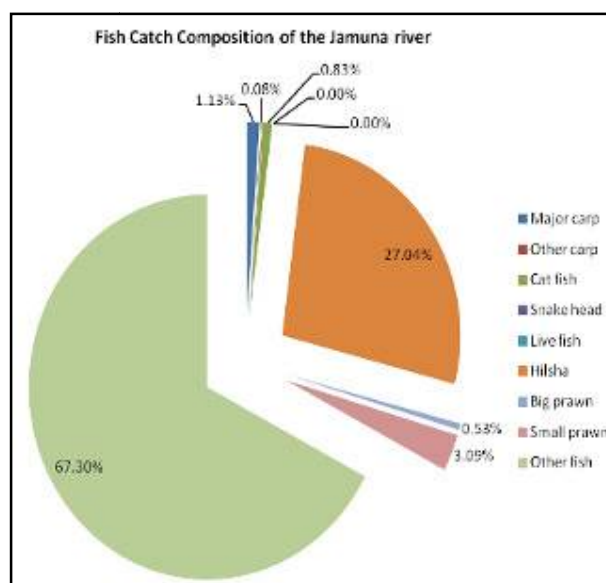


Figure 6.37: Fish catch composition (percent) of the Jamuna River (FRSS, 2012)

6.5.12. Aquatic Invertebrates

In freshwater biology, benthos are referred to the organisms at the bottom of freshwater bodies of water, such as lakes, rivers, and streams. These are the organisms which live on, in, or near the benthic zone. Most organisms in the benthic zone are scavengers or detritivores. Different types of Zoobenthos and Phytobenthos exist in the aquatic part of the study area. Insect larvae constitute the most numerous and diverse zoobenthos group. Daphnia, Cypris, Cyclops and several copepods are important zooplankters in freshwater and are food of many fish and other crustaceans.

According to a survey of the Department of Zoology, Rajshahi University, the rivers in Bangladesh once thrived with thousands of species of zooplankton and zoobenthos. The number of species has dwindled to 19 species of Rotifer, 12 species of Cladocera and 11 species of Copepoda. Many other indigenous species of plankton, beneficial insects and water worms have become extinct or on the way to extinction (Bhuiyan et. al. 2008). During an earlier study, 11 species of Crustacea (Arthropoda) and Gastropoda (Mollusca) were recorded in the Padma river (. Crustaceans included four species: Macrobrachium rosenbergii, M. malcolmsonei and Cancer sp. which are present throughout the year and breed during December-February; and, M. lamarrei which also is present throughout the year and breeds during April-June. Two species of mollusks were collected (Pila globosa and Unio sp.); these species are present throughout the year and breed during April-June. Among non-fin fishes 36 percent were arthropods, 18 percent, mollusks and 45 percent chordates.

Crustaceans are predominantly aquatic; the class Crustacea includes the crabs, shrimps, lobsters, barnacles, water fleas, fish lice, and hermit crabs. The study area supports many important freshwater crabs. Of them *Paratelphusa lamelliformis* is commonly used as food.

During a benthos study of the Fourth Fisheries Project (Willoughby et. al., 2004) a checklist of common benthos indicator was prepared for the fresh water rivers in Bangladesh; indicator species are shown in **Figure 6.38**.



Figure 6.38: Benthos indicator species for fresh water bodies in Bangladesh

These freshwater invertebrates play several important roles in freshwater ecosystem. They are instrumental in cleaning excess living and non-living organic material from freshwater systems, a service that contributes to the overall quality of the freshwater resource. Detritivores that feed on decaying organic matter speed up the decomposition process, maintaining the nutrient load in the freshwater resource. Freshwater mussels filter the water on a microscopic level, removing algae, bacteria, and other microorganisms. Water quality degradation adversely impacts the health of aquatic communities including fish and invertebrates. As a result, benthic freshwater invertebrate communities are valuable indicators of water quality.

6.6. Dry Season Data

Environmental quality and ecological baseline data will be collected in the project area similar to wet season data, preferably at the same locations or transects using similar approaches and methodologies. For ecological data, priority will be given to detailed baseline data collection along flood retreat areas (areas that are submerged during high-flow season) and the chars, which emerge above water and are expected to provide nesting and breeding habitat for several migratory species, endangered turtles and fish (in koles). Site visits and investigations of all the environmentally sensitive locations (based on the inventory of valued eco-system components) will be carried out, and on the basis of that, baseline description and maps will be prepared

A summary of the key primary data to be collected during day season is given below:

- Surface Water quality in key khals and beels(measure at least PH, DO, BOD₅, TDS, As, Fe at minimum 8 vulnerable locations within the project area);
- ground water quality; ground water level(measure at least Mn, As, Fe, EC at minimum 6 vulnerable locations within the project area);

- air and noise quality (measure at least PM₁₀ PM_{2.5}, SPM at minimum five locations for air and at least 10 locations for noise along the Embankment);
- Land use patterns in the flood plain above the dry-season A/D line and the embankment.
- Description of aquatic and terrestrial habitats in charlands and flood plain particularly for areas that are submerged during the high-flow season;
- Description of floral and faunal species associated with above habitats;
- Description of habitats for endangered species;
- key migratory bird species, their nesting and feeding areas;
- Environmental and ecological hot-spots particularly in those areas that are submerged during the high-flow season;
- description of habitat along the river bank where revetment will be carried out; and
- description of habitat from where sand extraction is likely to be carried out.

The above data will be collected and the present EIA will be updated before the initiation of the construction works of the project.

7. Description of Social Environment

This chapter describes the existing social environmental conditions of the project area. This description has been prepared with the help of secondary literature review and field data collection.

7.1. Overview of Erosion and Migration

The people who live on the right bank of the mighty river Jamuna have been suffering from the curse of erosion for several years under the effect of a westward shifting river which has severely affected their livelihood opportunities posing threat to life (see **Figure 7.1**). The information and data presented in this section will also reveal the dimensions of this threat and insecurity while the following figure presents graphical evidence.



Figure 7.1: River Bank Erosion along Jamuna

Major threats to these people emanate from river erosion and selected reflection in the following description would reveal the nature and depth of this threat. River erosion and the subsequent displacement is almost a regular phenomenon on the right bank of Jamuna and **Table 7.1** unfolds its scale. The range of vulnerabilities to the lives of these people is really wide what will be chronicled in this brief but a few are devastating leaving little opportunities to escape or recoup from the destruction. It is now commonly believed that each day thousands of people throng into the capital and a substantial section are the victims of such erosion. Since transport has improved than the past such mobility has become easier. Unfortunately many of them end up in the state of squatters.

Table 7.1: Time(s) shifted homes in the past among the households in the priority area

Times (s) shifted	percent N=3443
0	51.6
1-5	41.3

Times (s) shifted	percent N=3443
6-10	5.9
11-20	0.9
≥21	0.3
Total	100.0

Source: Priority Area Survey

Almost half of the affected households have experienced the lesson of shifting at some points of their life/household cycle. On the other hand, 51.6 percent never shifted who may be regarded as the old residents of this area. About 41.3 percent shifted in their life/household cycle 1 to 5 times. Similarly 5.9 percent shifted six to ten times. There are 0.3 percent households who experienced this bitterness for more than 21 times. River erosion and displacement have depleted their resources and infused extreme vulnerability contributing to the process of impoverishment.

The phenomenon of displacement and displacement is a part of the life for people who live on the right bank of Jamuna. Earlier table gave idea about its scale and the above table establishes the causes. River erosion is the prime factor behind displacement is no longer a hypothetical statement, if the above table is analyzed. About 97 percent affirms this cause that is erosion has led to their displacement where they used to live (**Table 7.2**).

Table 7.2: Reasons of Displacement

Reasons	percent N=1687
Displaced by River Erosion	96.91
Commercial Opportunity	0.36
Land Scarcity	2.43
Socio-Political Conflict	0.12
Family Problem	0.18
Total	100

Source: Priority Area Survey

7.2. Socioeconomic Perspective

Sirajganj is predominantly an agricultural area and Bogra has got slightly larger non-agricultural base. However, the scale of industrialization or urbanization cannot be compared with metropolitan areas. Thus villages and rural society constitute the core of its entity. Over the years its traditional agriculture has undergone changes with the introduction of Green Revolution technology. Changes in the agrarian society took place

at the structural and technological levels. Although agriculture is the mainstay of its economy, Sirajganj earned fame for its handloom industry which produces *saree*, *lungi* and other clothes. In the late seventeenth and early eighteenth century it was commercially an important place. However, being faced with steep competition particularly from the clothes produced in the mill its business has been affected leading to shutdown of many handloom units. Many of them took loan from the banks but being failed to repay went bankrupt. Another commodity is popular of both districts is the cow milk and sweet food such as curd. Large milk manufacturers of the country gather milk from this district for retail sale in the large cities of the country. On the other hand Bogra has larger presence of banks and other financial institutions¹⁴. Bogra town is larger than Sirajganj and vegetable cultivation is also widespread in this district.

Sirajganj was a sub-division and elevated to a district in 1984 and Bogra was all along a full-fledged district. In both places people are mostly day laborers engaged in agricultural and non-agricultural activities and the respective proportion would be more than 28 percent¹⁵. In non-agriculture sector the wholesale and retail business constitute more than half of the functional enterprises and still there is no textile, garments, steel and engineering industry in both districts, in Bogra district the presence of rice mill is noteworthy¹⁶. About 15 percent households are engaged in different services which are related to the enterprises carrying out different small and medium scale business. Some are also engaged in non-governmental organizations. Less than 1 percent of the enterprises are related to modern sector such as banking, insurance and financial institutions¹⁷. Roughly 11 percent households would be found in agriculture and about 15 percent households are engaged in business of different kinds. Transport sector comprising, rickshaw, van, and buses also absorb 8 percent of the households.

Nuclear family is the predominant form among different family types. With the decrease of the size of the agricultural holding and splitting of the households owing to the process of inheritance the nuclearization of families is taking place¹⁸. The proportion of joint family (where budget and kitchen are shared) is decreasing because of the fact landlessness has increased. The role of the extended family is present to some extent where the kinship interaction is noticeable, psychological attachment apparent with mutual support. Corporate spirit or neighborly relationship does not function intensely nowadays since individualization and market norms has intruded in a gradual manner, lineage relationship becomes relevant more at the time of election while political factionalism has emerged to a perceivable extent. The role of the union parishad in the rural power structure is visible more than the traditional *samaj* or *salish*. The effect of globalization on rural culture is becoming distinct in terms of dress code, language and others. The process of migration has also increased generating effect both on economy and culture. Sirajganj town is the victim of river erosion and the socioeconomic development of the area has been affected by this process.

¹⁴ Key Informant Interviews

¹⁵ Household Survey, 2014, RBIP

¹⁶ BBS (2013), District Statistics 2011, Sirajganj and Bogra, Ministry of Planning, GOB

¹⁷ BBS (2013), District Statistics 2011, Sirajganj and Bogra Ministry of Planning, GOB

¹⁸ Key Informant Interview.

7.3. Administrative Units and Set Up

Two tiers administrative set up mark the district administration consisting of district and Upazila while union *parishad* function as local government at the grass root level. The District administration is headed by the Deputy Commissioner. District administration is a part of the central administration controlled from the capital Dhaka. The Deputy Commissioner at the district administration is supported by three Additional Deputy Commissioners assigned to general administration, revenue and education, besides an additional district magistrate. Police administration is headed by a Superintendent of Police directly controlled from the capital Dhaka. The Deputy Commissioner holds a very wide range of responsibility which would be as many as sixty plus. It includes revenue management, land administration, district and executive magistracy, public order and safety, law and order, government treasury, licensing and others.

At the district and sub-district level different governmental offices related to different ministries, directorate and department are functional. To ensure law and order there is a police department along with para-military force. Related to agriculture and food a number of offices are present – agricultural extension, fishery, livestock and others. The responsibility of communication and engineering lies in the hand of roads and highways, tele-communication and others. For health and education there are specific offices. Schools and hospitals fall within the purview of these offices. Besides, there is the department of forestry, human resource development and others. Each office at the district level is headed by a district officer, while a coordination body is there headed by the Deputy Commissioner to integrate the activities. Similarly the Upazilla Nirbahi Officer or the Sub-district Executive Officer coordinates the activities of different offices while each office headed by its respective officer. There are a number of NGOs functioning in this district engaged in health, education, environment, women's empowerment and livelihood sectors. Micro-credit institutions are important segment of this part¹⁹.

Union *Parishad* consists of 14 persons who are entrusted with executing official responsibility including a chairman, nine councilors, three women councilors and a secretary. Structurally this local body consists of nine wards each is represented by an elected councilor irrespective of sex. However, for each three wards one woman councilor is elected. It is a coordinating and executive body. There are 13 standing committees with specific responsibility (e.g., infrastructure development, education or health). There is a coordination body comprising the chairman, councilors, government and non-government staff working at the union level. The activities of the government and non-government organizations are coordinated and facilitated at the union level through this entity and generally 10 to 15 villages constitutes a union (the following figure an Union *Parishad* viewed from outside).

NGO's are expected to liaison with the Union *Parishad* while carrying out their respective jobs. Union *Parishad* is entitled to collect holding tax and spend for development. It receives annually development from the government for road maintenance and other infrastructure work, however, the budget allocation is limited. A large part of the Social Safety Network activities (e.g., old age pension, food for work, test relief work) are the responsibility of the Union *Parishad*.

¹⁹ BBS (2014), *Statistical Pocketbook Bangladesh 2013*, Ministry of Planning, GOB and the governmental portal.

The priority area belongs to four Upazila namely, Kazipur, Sirajganj Sadar, Sariakandi and Dhunat. All four Upazila include municipality, indicating the progress of urbanization to a certain extent. There are 846 villages in the area. See **Table 7.3** for information on municipalities, unions, mauzas, and villages in the area.

Table 7.3: Number of Upazilla, municipality, union, mauza and village in Sirajganj district

Upazilla	Municipality	Union	Mauza	Village
Kazipur	1	9	108	172
Sirajganj Sadar	1	15	187	294
Dhunat	1	10	90	207
Sariakandi	1	12	100	173
Total	4	46	485	846

7.4. Demography

Population size is varying in different Upazila. Highest population is found in Sirajganj Sadar Upazila which 555 thousands. It is lowest in Sariakandi Upazila which 271 thousand. In two upazila Kazipur and Dhunat, the male is lower than female, it is same in Sariakandi Upazila and in Sirajganj Sadar it is higher. See **Table 7.4** for some salient data on demography.

Table 7.4: Population, male female distribution and other relevant information

Upazilla	Population			Sex ratio (M/F)	Average size of household	Density per sq.- km.
	Male	Female	Total			
Kazipur	1,35000	1,40000	2,75000	97	3.94	835
Sirajganj Sadar	2,79000	2,76000	5,55000	101	4.38	1734
Dhunat	1,43000	1,49000	2,92000	96	3.90	1180
Sariakandi	1,35000	1,36000	2,71000	100	3.58	663

Source: BBS (2013), District Statistics 2011, Sirajganj and Bogra, Ministry of Planning, GOB; BBS (2013), District Statistics 2011, Sirajganj and Bogra Ministry of Planning, GOB.

Average household size is less than 4 in three Upazila while it is much higher than 4 in Sirajganj Sadar Upazila. Sirajganj is highly dense in terms of population; it is 1734 for each sq.km. The Bangladesh average is 1203, which means that the density is much higher in Sirajganj Sadar. One major reason for this consequence is the migration of river erosion victims into this Upazila from other areas, the Sirajganj town is located beside this Upazila, with the expectation of job opportunity erosion victims assemble here. Already the population density of Bangladesh is very high compared to most countries of

the world²⁰. Present population density in four Upazila indicates how much pressure is there on resources. See **Figure 7.2** for population density in the area.

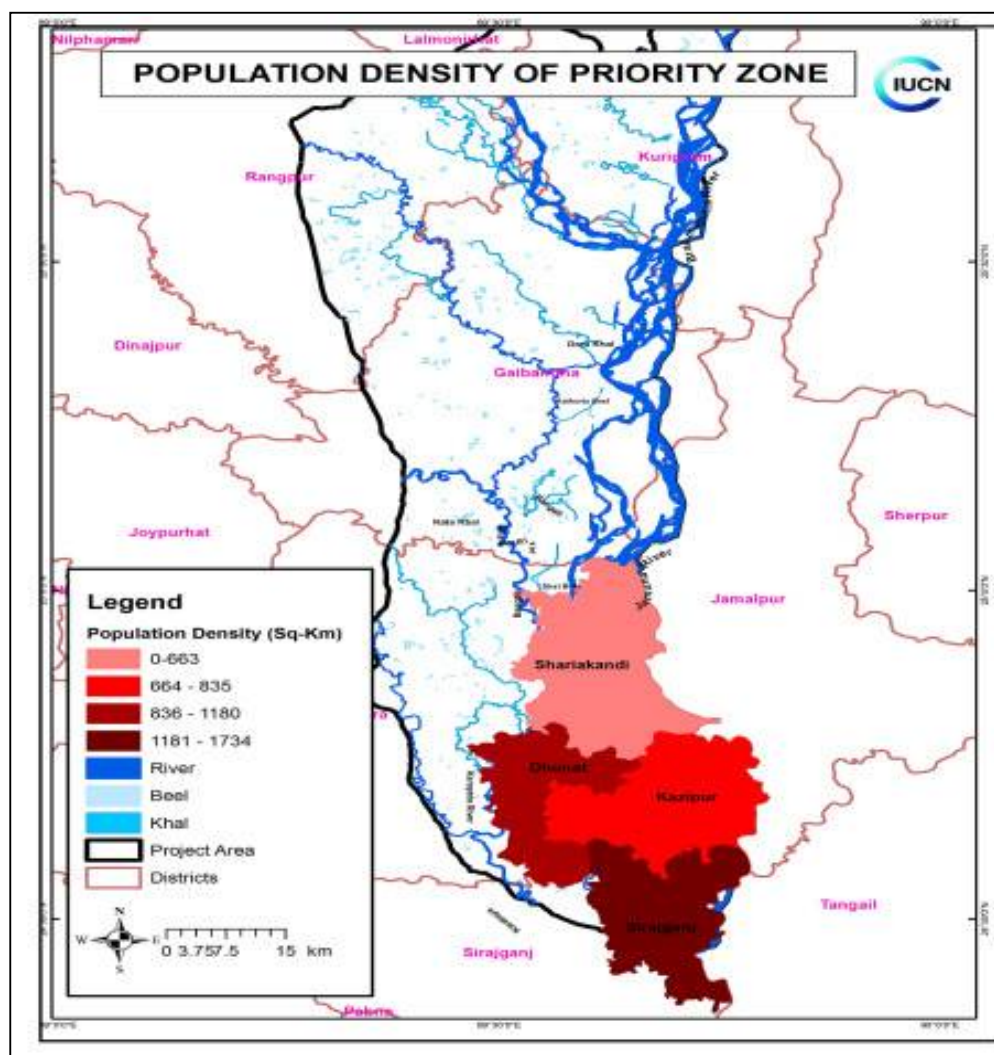


Figure 7.2: Population Density in Project Area

In all four Upazila population has increased over the years. Continuous increase of population is the most common feature here. The simple growth rate is found higher than the national average which 1.2 at present, the corresponding rate is much higher in four upazila and much higher in Sirajganj Sadar which is mostly for migration from the adjoining areas (see **Table 7.5**).

²⁰ Information of this section are gathered from: data.worldbank.org/indicator/EN.POP.DNST; BBS (2013), District Statistics 2011, Sirajganj and Bogra, Ministry of Planning, GOB

Table 7.5: Population in different years in four Upazila of priority area

Upazilla	1981	2001	2011	Simple annual growth rate between 1981 & 2011
Kazipur	214000	267000	275000	1.53
Sirajganj Sadar	340000	484000	555000	3.32
Dhunat	213000	271000	292000	1.95
Sariakandi	199000	240000	271000	1.89

Source: BBS (2013), District Statistics 2011, Sirajganj and Bogra, Ministry of Planning, GOB; BBS (2013), District Statistics 2011, Sirajganj and Bogra Ministry of Planning, GOB.

7.5. Income and Poverty

Occupation largely determines one's income level apart from other linkages (e.g., gift, donation or remittance although occasional). As it is transpired earlier that agriculture is the mainstay of their economic pursuit. In the context of agriculture, non-crop sector (e.g., chicken rearing, cow fattening or aquaculture) has developed in the recent time but it could absorb a bulk of households and the expansion of micro-credit has a large role to play in this regard. In non-agriculture transport, hotels or shops provide employment opportunities but mill or factory could not make any substantial headway. In **Table 7.6** brief idea may be gathered on what kind of occupations these people are engaged with.

Table 7.6: Occupations of the surveyed household head

Occupation	Percent N=3369
Day laborer(agri/non-agri)	28.32
Service	15.49
Business	14.49
Agriculture	10.69
Rickshaw/van puller	7.06
Old/retired/children	6.53
Carpenter	4.36
Remittance/migrants	1.75
Fisherman	1.60
Housewife/unemployed	1.40
Others	8.31
Total	100

Others: Handloom owner, handloom worker, business, carpenter, blacksmith, tailor, teacher, driver, mason, physician, folk healer, boatman, rent out house, crop intermediary, livestock seller, poultry seller, fodder seller, milk seller. Source: Priority Area Survey

It is found that 28.32 percent presently pursue the job of wage laborer either in agriculture or non-agriculture. It is a job that requires little technical competence, physical capacity is more important in this regard or the capacity for doing hard labor. Service is the present occupation, such reported by 15.49 percent, however, the corresponding level of the service may be ascertained if it is considered that very few household heads reported to possess tertiary educational qualification (discussed in a later table), in other words they are perhaps engaged with the job of low level support staff. Business is reported by 14.49 percent which include grocery business and others. There is 10.69 percent household heads that pursue agriculture or cultivation. Why the proportion of the people pursuing agriculture is limited, the answer would be found in the fact that they have minimum agricultural land and the expanding non-agricultural sector at present also encourage many of them to switch over to different jobs. Rickshaw and van puller is found 7.06 percent which is related to low skill job.

More than 4 percent are found who are carpenter, it may be uniqueness of local tradition. Remittance or migration is nowadays gaining ground and 1.75 percent heads have reported it as their occupation. There are fishermen or housewives among the household heads who represent more than 1 percent as individual category among the total household heads. It is found 8.31 percent are clubbed together into the category of 'other', it may be noted all the individual proportions which are individually less than 1 percent are included here.

The income situation and poverty/vulnerability condition is reviewed through a survey among the households who are directly related to the priority area. Apart from income the land ownership and possession is also reviewed among the same households to assess their access to resource in a predominantly agricultural society. In addition their exposure to river erosion and its effect is also reviewed to understand the process of their vulnerability to natural disaster. It starts with income which is significant as a proxy indicator of socioeconomic situation. It reflects on the standard of living, economic capacity and the adequacy of livelihood activities.

There is a direct relevance of the income level in the assessment of poverty condition of a household. Poverty line is also expressed in terms of money although it fluctuates because of inflation. The income range what are used in this table are divided into three slabs, the lowest range is TK ≤ 5000 , it may be assumed that for a household of 4 people income of this range is hardly enough to ensure necessary subsistence, in other words, those who do not have such income may be called poor. About 32 percent households are found whose monthly income represents this category. However, 40.3 percent earn monthly income which is TK ≥ 7500 (**Table 7.7**). Above amount is not large, may be enough to ensure subsistence need. From the national estimate we know that about 30 percent people are below the moderate poverty line at present.

Table 7.7: Monthly income of the households in priority area

Monthly income range (TK)	Percentage (N=3443)
≤ 5000	31.9
5001-7500	27.7
≥ 7501	40.3
Total	100.0

In a composite manner the socioeconomic condition of the surveyed households are expressed in **Table 7.8**, in which the vulnerability status is measured. The definition used to explain vulnerability is the following: (female-headed or elderly headed (>60yrs) or HH income < Tk6367/monthly or landless). Using these criteria more than 80 percent households are found in this category. Relevant situation indicates not only inadequate income is the feature of these households many are headed by elderly or women or mere landless.

Table 7.8: Vulnerability status of the households in priority area

Vulnerable status	percent N=3443
No	19.1
Yes	80.9
Total	100.0

The presence of large scale vulnerability owes to a number of factors. Continuous exposure to erosion has weakened their economic condition which is accompanied by affected agricultural production apart from limited employment opportunities. Mere manual labor based work could not generate enough income to overcome vulnerable situation. High vulnerability may create a poverty situation, from that view point this is an important issue.

Land is an important wealth in an agricultural society because it provides livelihood opportunities apart from constituting an important basis for social status. Surveyed households are found to control land through legal ownership, possession and renting practices. **Table 7.9** provides information on the extent of land control used for the purpose of dwelling either by ownership or possession. A number of interesting features have surfaced in this regard. First of all the amount of land used for dwelling is small. About 81 percent have placed control over 1 to 10 decimal of land for the purpose of dwelling, above amount include both own and those accessed through other means (khas and rented). Another 12.8 percent control 11 to 20 decimal of land. There are very few among the surveyed households with large amount of dwelling land. The corresponding scenario changes sharply in the next column when own land of dwelling is reviewed. As high as 55 percent do not own land for the purpose of dwelling because they live on other's land - either khas or rented. 31.7 percent own 1 to 10 decimal of land while 9.8 percent own 11 to 20 decimal of land. It means more than half of the affected households are absolutely landless in terms of dwelling land.

Table 7.9: Possession and ownership of dwelling land of the households in priority area

Land amount interval (dec.)	Own+Khas+Others percent N=3440	Own percent N=3442
0	1.3	55.0
1-10	81.1	31.7
11-20	12.8	9.8

Land amount interval (dec.)	Own+Khas+Others percent N=3440	Own percent N=3442
21-50	4.0	3.1
51-100	0.5	0.2
101-250	0.2	0.1
≥251	0	0
Total	100.0	100.0

With regard to possession and ownership of commercial land different scenario has emerged further. Almost none of them either possess or own any land for this purpose. It is not unlikely over the years they have lost land to river. **Table 7.10** shows how little amount of land they have even for commercial activities.

Table 7.10: Possession and ownership of commercial land of the households in priority area

Land amount interval (dec.)	Own+Khas+Others percent N=3435 ¹	Own percent N=3443
0	98.7	99.7
1-50	1.0	.3
Total	99.8	100.0

Almost 90 percent reported not to even own cultivable land (**Table 7.11**). It means these people need to depend on market to procure the articles of subsistence, such as rice or vegetable. In the project vicinity the community members do not own cultivable land much, however, in the countryside of Bangladesh including the Upazila of the priority area about 69 percent rural households are absolutely landless at present²¹. Occupational distribution shown in an earlier table also revealed, small proportion of household heads pursue cultivation as an occupation.

Table 7.11: Possession and ownership of cultivable land of the households

Land amount interval (dec.)	Own+Khas+Others (percent) (N=3441)	Own (percent) (N=3442)
0	88.8	89.2
1-50	5.9	5.8
51-100	2.4	2.2
101-250	2.0	1.9
251-500	0.8	0.7

²¹Raihan S., et. al. (2009), *Access to Land and Other Natural Resources by the Rural Poor: The Case of Bangladesh*, South Asian Network on Economic Modeling (SANEM), Department of Economics, University of Dhaka, Bangladesh,

Land amount interval (dec.)	Own+Khas+Others (percent) (N=3441)	Own (percent) (N=3442)
≥501	0.2	0.2
Total	99.9	100.0

Table 7.12 is a consolidated one revealing important scenario. Different observations that have been made above on the possession and ownership of land are more compositely presented here. Neither possession nor ownership of land exists on a significant scale. Possession includes both own, khas and rented land. On average 7.55 decimal land is there for dwelling purpose, of what 4.46 is own and the rest is either khas or rented. The amount of commercial land is negligible. In a land scarce condition in and around priority areas, the victims of erosion do not have usual scope of procuring land. Average amount of cultivable land under possession is 10.17 decimal, of this amount 9.76 decimal is own, it means small amount of cultivable land is gathered from khas or other sources. With regard to dwelling land the importance of khas and others are found important while cultivable land is gathered from ownership although the amount is meager.

Table 7.12: Possession and ownership of average dwelling, commercial and cultivable land of the households in priority area

Categories	Regular	
	Own+Khas+Others (Dec.)	Own (Dec.)
Dwelling	7.55	4.46
Commercial	0.04	0.02
Cultivable	10.17	9.76

7.6. Education

The situation related to education has been analyzed using the household survey data. It is found that about 50 percent of the surveyed household heads never attended school (**Table 7.13**). It is a situation which is an effect of the past when governmental and NGO efforts to popularize education was not so vigorous. At present enrollment rate at the primary level has gone up significantly although dropout rate could not be contained well. In the third table of this section we would focus light on side of infrastructure though which one can assess what new strides are made towards attaining a bright educational goal. More than a quarter in the table reported to have attended primary school, little more than 10 percent attended secondary school. Less than 6 percent passed SSC examination, 4 percent passed HSC examination and only 2.8 percent passed tertiary level education.

Table 7.13: Educational qualification of the household head

Educational qualification	Percent (N=3363)
None	49.7
Primary	27.0
Secondary school, vocational (VI-X)	10.8

SSC & equivalent	5.7
HSC	4.0
Tertiary (bachelor, master's, equivalent)	2.8
Total	100.0

In **Table 7.14**, gender segregation with regard to literacy is addressed. Two issues are notable, the traditional male advantage in terms of literacy and the widespread illiteracy. In a relative sense Sirajganj Sadar is ahead of three other Upazila in terms of overall literacy rate, Dhunat lags most than the other three. In all four Upazila male are ahead of female in attaining literacy, for example, 40.7 percent male who are more than 7 years old are literate while it is 34.4 percent in the same Upazila, the corresponding situation is same for other Upazila.

Table 7.14: Male and Female Literacy at the Upazilla Level in 2011

Upazilla	Male	Female	Both
Kazipur	40.7	34.4	37.5
Sirajganj Sadar	50.1	45.8	48.0
Dhunat	38.3	33.1	35.6
Sariakandi	40.6	33.4	36.9

It is noted above that presently concerted efforts are made to spread literacy both by the government and the non-government agencies. Universalization of primary education is also legislated. In this regard institutions to promote primary education have been established. In **Table 7.15** some evidences in this regard is presented.

Table 7.15: Schools to promote primary education in four Upazila

Upazilla	Government Primary		Registered Primary		Private Primary		Kindergarten		NGO school	
	No of School	S/T ratio	No of School	S/T ratio	No of School	S/T ratio	No of School	S/T ratio	No of School	S/T ratio
Kazipur	108	32	110	39	18	41	16	20	23	30
Sirajganj Sadar	151	53	86	65	5	40	38	20	4	29
Dhunat	96	29	98	32	6	30	35	16	48	29
Sariakandi	83	45	78	62	4	39	6	26	83	30

In **Table 7.15**, number and types of schools in four project Upazilas is shown. Primary schools are run under different management. There is government primary school, registered school which receive subvention from the government, privately run primary

school, kindergarten school with a special focus on provisioning English language skill, and the primary schools run by different non-governmental organization (NGO). In the context of Bangladesh the role of NGO is significant because they have introduced innovative measure to popularize education particularly among the poor children bringing adjustment with their conveniences in terms of time and teaching style. Government primary schools are present on a larger scale in Kazipur and Sirajganj Sadar, although the teacher student ratio is 53 in Sirajganj Sadar because of the fact that it is peri-urban area with higher concentration of people. Registered primary school is highest in Kazipur Upazila. Private primary school are fewer in number bringing home a fact it does not attract attention of the people who can invest money. Kindergarten schools are relatively costlier than the other types of schools. Student teacher ratio is relatively better in the privately run primary schools.

7.7. Public Health

There are different diseases that mark the morbidity pattern of the people living in these four Upazila. The most common disease that is reported by the respondents is fever, which may be caused for various reasons, by contracting cold, inflammation or as symptoms of other diseases. Cold is also reported by about 57 percent, which is mostly a seasonal bout. Headache is also a complaint lodged by 36.04 percent. It is also an independent disease as well as a consequence. About 10 percent reported gastric/ulcer often related to the use of spice and excessive oil in cooking. Diarrhea was reported by 7.18 percent, once it was more common, now has been reduced owing to health campaign. The other diseases include anemia, eye problem and others. See **Table 7.16** for the prevalence of different diseases in the area,

Table 7.16: Morbidity pattern in four Upazila

Diseases	percent people reported N=641
Fever	82.22
Cold	56.79
Headache	36.04
Gastric/Ulcer	9.83
Colic pain	9.83
Diarrhea	7.18
Anemia	3.43
Eye problem	3.12
Pneumonia	2.65
Jaundice	2.50

Health seeking behavior is an important part of how disease is dealt with. Medical pluralism marks the prevailing phenomenon. Allopathic treatment is the most common although taken from different sources. For example, 46.30 percent took treatment from Upazila health complex, 16.24 percent received treatment from union health center while 17.52 percent received it from district hospital (see **Table 7.17**). This also implies the combination of modern and traditional treatment. For example, 36.04 percent also received treatment from village doctor which may include folk healer or quack.

Treatment is also sought from the drug store attendants who are trained healers; such phenomenon is also seen in other parts of the country.

Table 7.17: Health seeking behavior in four Upazila

Places where treatment sought	percent reported N=702
Union health Center	16.24
Community clinic	12.54
Upazila health complex	46.30
District hospital	17.52
NGO clinic/hospital	3.13
Pharmacy	23.22
Homeopathy	0.71
Village doctor	36.04

Maternal mortality is a major public health concern. With the improvement of public health situation the maternal mortality is often reduced. One of the major causes of maternal mortality is the traditional delivery practices which mean senior female members of the family or traditional birth attendant carry out the delivery of the pregnant women at home. There a number of disadvantages when delivery of a pregnant women take place at home. The condition provided by a hospital particularly from the point of sterilization cannot be provided at home, which leads to casualty of mother and newly born. The serious of the condition of the pregnant women cannot also be ascertained due to lack of modern equipment. Although at present traditional birth attendant is provided with short training and delivery kit but it cannot reduce the risk substantially. Often it is found that at a critical condition the pregnant woman is removed to hospital. **Table 7.18** shows that about 71 percent delivery is carried out by the birth attendants that are not trained.

Table 7.18: Background of persons conducting delivery of pregnant women

Person conducting delivery	percent of delivery
Government doctor	7.50
Private doctor	4.06
Government health workers	2.66
NGO health professional	0.16
FWV/FWC	0.47
Trained Traditional Birth Attendant	9.69
Traditional Birth Attendant	70.94
Village doctor	0.78
Others	3.75

7.8. Water Supply and Sanitation

Water is an important element in every day's living. It is used for different purposes, as for the purpose of drinking, it is also used for the cleaning and washing. Water could be a serious threat for life if it is polluted by the presence of microbiological organism. The

issue of water borne disease and mortality is well known. Cent per cent households interviewed for this purpose reported that they use tube well to fetch water for drinking (see **Table 7.19**). Tube well draws water from a certain depth below the surface and the general assumption is it is safe for health.

Table 7.19: Sources of drinking water among the surveyed households

Sources	percent (N=679)
Tube well	100
Pond	-
River	-
Rain water	-
Other	-
Total	100

Household chores are another purpose that requires water. It includes cooking, washing utensils and clothes and cleaning house. Safe water is extremely necessary for cooking and washing. For house cleaning one may use water which may not as safe as the one used for drinking. However, 99.1 percent respondents reported that they use tube well water for the purpose of household chores (see **Table 7.20**).

Table 7.20: Sources of water for household chores

Sources	percent (N=679)
Tube well	99.1
Pond	0.6
River	0.3
Rain water	-
Other	-
Total	100

In the recent time the presence of arsenic in ground has caused a grave concern among the public health officials since it is hazardous for health. The water of tube well has been affected by arsenic and the government has taken special measure to provide source of drinking water free of arsenic. The tube well with arsenic water has been sealed by the public health department and in new spot it has been sunk. 80.6 percent respondents reported that the water of their tube well is arsenic free. However, 7.1 percent are found to use arsenic contaminated water which is posing threat to health condition, and about 12.4 percent respondents do not know about arsenic contamination (see **Table 7.21**).

Table 7.21: Presence of arsenic in drinking water

Presence of arsenic	percent (N=679)
Arsenic free	80.6
Not arsenic free	7.1
Not known	12.4
Total	100

Human excreta are a source of different contagious diseases. Fowl and flies carry microorganism from human excreta and spread into the food eaten by human being. Thus the use of sanitary latrine is very important to prevent the spread of contagious diseases such as diarrhea, typhoid, jaundice and others. About 58 percent respondents reported the use of sanitary latrine in the priority areas a huge section do not use such provision. It means health risk is quite significant in the priority areas. Moreover 1.55 percent still use open space for defecation. It is expression of poverty as well as lack of awareness. See **Table 7.22** for data on latrines used in the area.

Table 7.22: Types of latrine used

Types of latrine used	percent (N=645)
Sanitary	57.83
Non-sanitary	40.62
Open place	1.55
Total	100

7.9. Electricity

Electricity is an important utility for a household. Its necessity is manifold. It gives comfort and convenience. It depends on one's capacity whether that person would get access to electricity provided electricity in that particular area. In all four upazila electricity is available including the villages. A number of findings of this report indicated tight economic condition of the households living in the project area. As shown in **Table 7.23**, more than three quarter do not have access to electricity.

Table 7.23: Access to electricity

Access to electricity	percent (N=679)
Yes	24.6
No	75.4
Total	100

The number of bulbs used by different households is found to vary. It is related to the number of room the house has got and the need. It may be assumed that the house with several rooms would need several bulbs, and it may be related to the economic condition of a household. More than fifty percent households use one or two bulbs, indicating the size of house is small or the number of rooms is not many (**Table 7.24**).

Table 7.24: Number of bulbs used

No of bulbs	percent N=169
1	30.8
2	24.9
3	17.8
4	7.7
≥5	18.8
Total	100

7.10. Transport and Communication

In the last few years roads and communication has developed in Bangladesh. Back in late 1980's roads and highways were not developed in the northern districts but gradually connectivity has increased. With the construction of Bangabandhu bridge further impetus has been created. Highways have been widened, internal roads have been constructed, villages have been connected with the center and markets. However, annual flood is a major threat to the maintenance of these roads in the northern districts. All Upazila are connected with the district town through public bus and because of increased business activity and administrative purposes people often travel the district headquarter. Many also travel to capital Dhaka when needed.

Among four Upazila Sirajganj Sadar is having greater length of roads relative to other three Upazila (see **Table 7.25**). More significant is the fact that Sirajganj Sadar has got railway communication only. The metal covered roads are also highest in Sirajganj Sadar. Kazipur and Sariakandi Upazila have got lesser length of metal covered roads. Earthen roads are of different length in different Upazila, it is highest in Sirajganj Sadar while lowest in Kazipur.

Table 7.25: Roads and railways (kilometer)

Upazilla	Railway	Metal covered road	Semi-metal covered road	No metal cover & earthen road
Kazipur	0	87	3	294
Sirajganj Sadar	22	122	9	518
Dhunat	0	93.25	10	477.63
Sariakandi	0	86	9.04	406.06

People's mobility has increased in rural areas. In the peri-urban area like Sirajganj Sadar it is also high. For various reasons people's mobility has increased, both for business and employment. As a result the number of transports has also increased. Since Sirajganj Sadar is located beside Sirajganj town the number of rickshaws, cycle van and other motorized vehicles is also higher than other three places. The predominance of manually operated vehicles such as rickshaw and cycle van is notable. In rural Bangladesh locally innovated transport vehicles like nosimon (shallow engine generally used for small scale irrigation is fitted into a small van to carry goods) plies over the road, although restriction is put over its movement. See **Table 7.26** for the number of vehicles in various Upazilas of the project area.

Table 7.26: Types of vehicles registered and non-registered

Upazila	Rickshaw	Cycle Van	Three wheeler	Small hauler & other converted vehicle
Kazipur	115	188	125	25
Sirajganj Sadar	6746	633	2007	185
Dhunat	122	172	80	160
Sariakandi	75	730	25	99

7.11. Chars

In four Upazila there are more than fifty shoals in the priority area, which are locally known as *chars*, built through continuous siltation of the place in the riverbed where it is raised. The people who live in the land-scarce countryside take the opportunity to shift to newly arisen *char* and often it leads to severe conflict between the contending parties with the consequence of bloody casualties. The people who earlier lost land to river owing to erosion place a larger claim although it was always a contested claim since the land documents of the lost land in the river do not provide clear indication of proprietorship. Sometimes land barons with political muscle lay claims on such chars backed by a band of armed members. Above conflicting situation negatively influence the lives of the char people which is true in this context also. Livelihood pattern shows they subsist on minimum income and the major occupations are found fishing, boat riding and cultivation

Commercial investment did not take place here because the longevity of these chars is always uncertain. People live in different types of houses which include mostly thatched houses, tin sheds and semi-concrete ones. Literacy rate among the adults is very poor while among the children participation rate at the primary schools is increasing although limited number of primary schools has hindered the process. There is no community clinic because of very limited health investment and countryside is the last resort of receiving treatment. Drinking water is fetched from hand tube well while unsealed pit latrine is commonly found for the purpose of defecation. Most people in these *char* live around subsistence level poverty line and hunger is not reported. Agriculture has got certain cropping pattern because of the large scale presence of sands, facilitating the cultivation of groundnut and fodder for cow. Paddy cultivation is noticeable in some *char* particularly the ones existing for a longer period of time. Transport is mainly bi-cycle and

foot. Electricity is almost absent and kerosene lamps provide light. Cooking fuel is mainly wood. **Table 5.4** provides names of the key chars in the priority reach.

7.12. Gender

Traditionally patriarchy predominates over the gender relation in rural Bangladesh. As a result women's position in family and society, role in division of labor, mobility or economic condition have been shaped in a particular manner. Compared to the male, the women enjoy lower status in family and society, engaged in household chores and their movement remains restricted to the home and around. However, in the last few decades the situation is gradually changing owing to macro-economic development (more than 2 million women in garment factories) and different development programs (micro-credit and self-employment of NGO, universal primary education, girls student stipend, gender awareness campaign among many). Women in the villages of these four Upazila are found to be engaged in different types of livelihood activities. Involvement with new activities led increased mobility of the women. More than 60 percent women interviewed in this respect reported that their mobility is not restricted to home. Homestead agriculture or livestock raising are some of the new activities. Involvement with livelihood activities has brought income and increased their control on cash, it has contributed to the consolidation of position in family and economic empowerment. In relation to mobility it is found that market related mobility has increased. However, more frequently they can visit to relative house and when necessary to the hospitals. Similarly women's reproductive health rights are also better reflected and they can take pregnancy decision by themselves. However, there are certain social ills still affect them which include eve teasing, dowry and early marriage. It means complete emancipation of the women from the curse of patriarchal exploitation is still incomplete.

7.13. Agriculture

7.13.1. Overview

Bangladesh is situated in the north of the Bay of Bengal and is predominantly low lying. The alluvial plains of the delta are formed by the Ganges, the Brahmaputra and the Meghna rivers. The economy of the country is primarily dependent on agriculture. About 71 percent²² of the total population lived in rural areas and are directly or indirectly engaged in a wide range of agricultural activities. The contribution of agriculture to GDP growth was 33 percent in 1980-81, 25 percent in 2000-2001 and 21 percent in 2005-2006.²³ The latest Household Income and Expenditure Survey (HIES), 2010 reported 17.6 percent of the country's population currently lives in extreme poverty -- defined as those people whose total expenditure is equal to the food poverty line (the cost of a basket of goods amounting to the consumption of 2,100 Kcal per person day). More food production is needed to improve the livelihoods of people who are still lying below poverty level (25 million or more), which directly related with flood control measure in west bank of Brahmaputra/Jamuna river. No major townships except Sirajganj have been established in the project area due to its vulnerability to river erosion and as such the areas/populations are mostly rural, so around 70 percent population dependent upon agriculture farming. The share of agriculture in annual family income of rural households

²² <http://www.tradingeconomics.com/bangladesh/rural-population-percent-of-total-population-wb-data.html>

²³ Updating Poverty Maps of Bangladesh, The World Bank, Bangladesh Bureau of Statistics, World Food Program, 2009

lived in west bank of Jamuna is 82 percent and small business only 8 percent²⁴. So their livelihoods are practically agriculture based which is under threat of breaching of embankment almost in every year (flood damage of crops), river erosion, sand deposit and opening of new watershed that washed-away fertile crop lands.

The construction of river embankments to protect agricultural land from seasonal flooding/inundation is a common and continuous phenomenon of the country. Usually the silty alluvium deposit caused by flooding is brought under cultivation within 2-3 years. The floodplain areas are traditionally fertile land with alluvium deposit but generally less productive due to depth of flood water level during the monsoon. Before construction of embankment in 1960 the traditional crops grown in the area are broadcast aman rice²⁵ (low yield potentials 1.0 – 10.5 t/ha during productive year), Aus rice also with low yield and local aman rice that was mostly vulnerable to flood damage. Some other crops like grass pea, corn, gram pulse, chili, and sugarcane were the crops in the dry season. The farmers were very poor and under threat of migration from their locality due to lack of livelihood support. After construction of embankment the scenario of crops and cropping and the livelihoods of people started to change. The flood plain areas became productive by started to produce good local aman rice reducing the areas of broadcasted deep-water aman rice. The dry land crops like vegetables and oilseeds started to occupy the areas of corn/gram pulse and sugarcane. In 80's major crops were early aus rice, jute, deep-water aman rice, gram pulse, corn, mustard, rabi pulses, rabi groundnut and sugarcane. Transplanted aman rice is sometimes planted on silty alluvium or silty soils as the floodwater recedes, and boro paddy is grown locally in depressions, usually using traditional irrigation devices or hand pumps. There were ample surface water and groundwater resources, but they are difficult to exploit for irrigation except by small-scale traditional devices or hand pumps because of shifting river channels and changing land qualities. At present the farmers are mostly cultivating High Yielding Varieties (HYV) of Transplanted Aman and HYV Boro rice instead of local low yield potential varieties, Aus²⁶ almost wiped out from the area. Among the popular crops now farmers have adopted boro rice, Aman rice, Maize, potato, mustard, chili, wheat, jute, and vegetables. The yield of rice has increased from 1.5 – 2.0 t/ha to 3.5 – 6.0 t/ha. Similarly the production per unit area of other popular crops potentially increased.

The area is still under threat of river breach the embankment during the monsoon that damages transplanted aman crop fully or partially. The breaching not only floods the crops, but also damages the fertility of the agriculture lands by depositing river sand. The proposed embankment would certainly restrict the occasional floods and sand cover of crop land and farmers would have good yield of transplanted aman (T. Aman) rice regularly which is presently irregular and governed by flood. It is expected that the proposed construction of embankment would not only increase the area of T. Aman cultivation but also increase the yield levels of T. Aman by 10-15 percent as the farmers would invest more when they ensure about no flood damage.

²⁴ Annual Report 2013-14, Second Crop Diversification Project, DAE, Khamarbari, Dhaka

²⁵ Deepwater paddy cultivated in low land with more than 180 cm water depth during monsoon, Transplanted aman rice cultivated in medium land during monsoon and aus rice either broadcast or transplant cultivated during pre-monsoon season (Mar-June)

²⁶ Three types of rice is grown in the country: Aus rice either transplanted or broadcast cultivated in pre-monsoon period (Mar to June); Aman rice either transplanted or broadcast in monsoon period (July to Oct); and Boro rice cultivated in dry/winter season (Nov to Feb).

7.13.2. Soil and Agriculture Resources in the Influenced Area of RBIP

7.13.2.1. Land Types

Land type is classified based on water depth of inundation during the monsoon season due to normal flooding. High land is classified as land which remains above flood level during the monsoon flood, medium high land flooded up to 90 cm, medium low land flooded up to 180 cm, low land flooded up to 300 cm and very low land flooded more than 300 cm during flood season. The majority of the cultivable land in the west bank of Jamuna/Brahmaputra river composed of medium high land (44 percent) followed by high land (24 percent), medium low land (20 percent), low land (8 percent) and very low land (4 percent)²⁷. Details of land types are presented in **Table 7.27**.

Table 7.27: Land Type of the project area

Land Type	Depth of inundation (cm) during monsoon	Area (ha)	Percent Of Total Area
High Land	Above normal flood level	62250	24
Medium High Land	Up to 90 cm deep	116246	44
Medium Low Land	90 cm to 180 cm	52477	20
Low Land	180 cm to 300 cm	21314	8
Very Low Land	More than 300 cm	10550	4
Total		262837	100

The area is characterized by presence of large numbers of chars (raised riverbeds surrounded by water) with an area of more than 25000 ha with poor soils especially the new ones, however comparatively older chars are productive in respect of cultivating dry land crops (sweet potato, sesame, mustard, groundnut, rabi vegetables, melons and recently maize) and livestock raising/grazing.

7.13.2.2. Soil Resources

The area included within the RBIP does not greatly vary in terms of Agro-ecological characteristics. The west bank of Brahmaputra/Jamuna River starting from north (Kurigram district) to south (Sirajganj district) has wide range of environmental conditions. Soil diversity in the project area occurs not only at regions, but at Upazila and even at village levels. The diversity of crop production and yield level is greatly influenced by land types, seasonal flood water levels and soil textures.

The agro-ecological regions and sub-regions of the country are differentiated mainly on physiographic, soil and surface flooding characteristics and the crop suitability assessments for each unit take into account agro-climatic factors in only a generalized way. Thirty agro-ecological regions and 88 sub-regions have been identified for the country based on physiography, soils, land levels in relation to flooding and agro-climatology. The present RBIP area comprises of the following agro-ecological regions: i) Active Teesta Flood Plain (AEZ – 2); ii) Karatoya-Bangali Floodplain (AEZ – 4); and iii) Active Brahmaputra-Jamuna Flood plain (AEZ-7).

²⁷ High Land: Land which is above normal flood level; Medium High Land: Land which normally is flooded up to about 90 cm deep during the flood season; Medium Low Land: Land which normally is flooded up to between 90 cm and 180 cm deep during the flood season; Low Land: Land which normally is flooded up to between 180 cm and 300 cm deep during the flood season; Very Low Land: Land which normally is flooded deeper than 300 cm during the flood season

The distribution of agro-ecological regions in the study area and their general soil characteristics is presented in **Table 7.28**. The map in **Figure 7.3** shows the presence of AEZs with its extent and locations.

Table 7.28: Agro-ecological zones in project area

Agro-ecological Region	General Soil Type/Texture	AEZ area (ha)	Area (%)	Land type in percentage				
				High land	Medium high land	Medium low land	Low land	Homestead and water
Active Teesta Flood Plain	Non-calcareous grey floodplains; Loamy + Sandy	83644	13	2	72			26
Karatoya-Bangali Floodplain	Non-calcareous grey/dark grey floodplains; Loamy + clayey	257158	39	23	44	14	1	14
Active Brahmaputra-Jamuna Flood plain	Non-calcareous grey floodplains; Loamy+Sandy	319001	48	5	37	20	8	30
All		659803	100	12	44	15	4	23

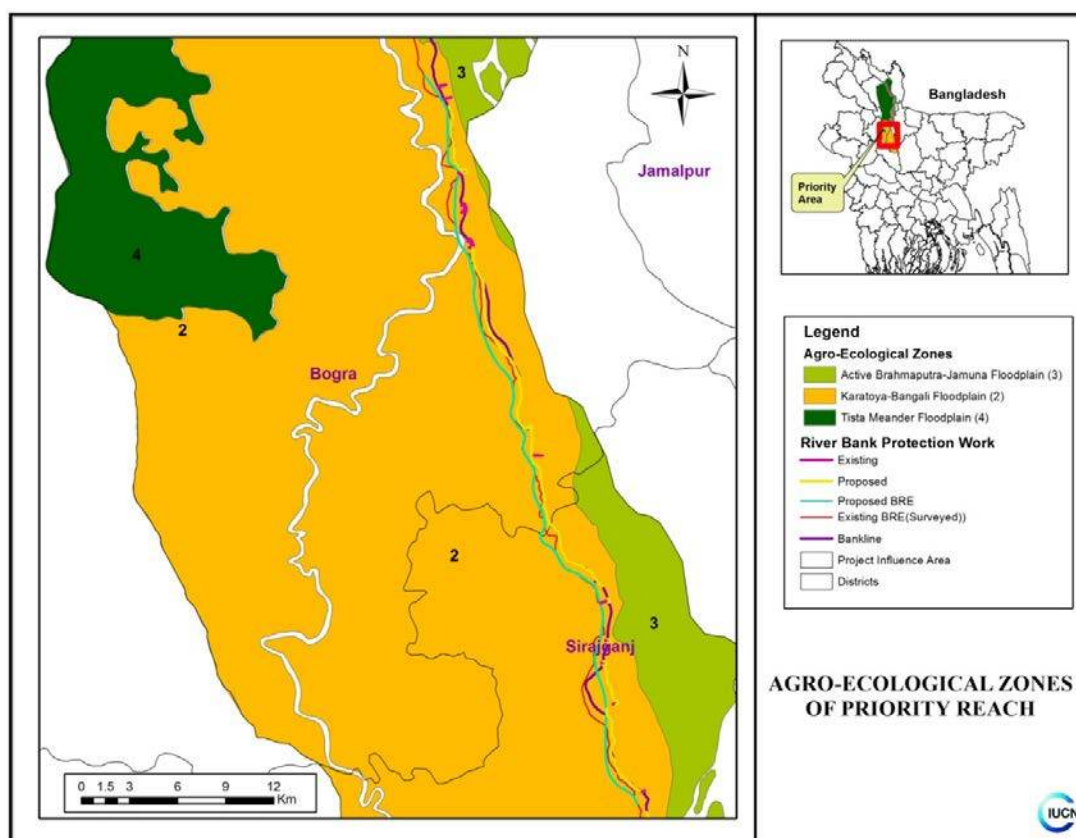


Figure 7.3: Agro-ecological Zones

7.13.2.3. Soil Characteristics of the Project Area

The soils of the areas are mostly non-calcareous alluvium and non-calcareous gray floodplain. Soil texture is classified as loamy plus sandy in AEZ 2 and 7 while loamy plus clayey in AEZ 4. Complex mixtures of sandy and silty alluvium occupy most char land, but there are some developed grey silty soils on older areas of alluvium, especially along the west coast of the Brahmaputra/Jamuna River. However large areas of sand may be deposited in high flood years, especially in the north (Kurigram). The region has an irregular relief of broad and narrow ridges and depressions, interrupted by cut-off channels and active channels. Both the outline and relief of char formation are liable to change each flood season due to bank erosion by shifting channels and to deposition of irregular thickness of new alluvium. Local differences in elevation are mainly 2-5 meters.

7.13.3. Farm Size of Project Area

Using the data base of DAE collected from Upazila levels the total numbers of households in the influenced area of the project is estimated as 708,792. The farm size of households²⁸ in the western bank of Brahmaputra/Jamuna Rivers corresponds almost equally with other areas of the country. The numbers of marginal households are 253,393 (36 percent of total hh), small households 229,326 (32 percent), landless households 158,685 (22 percent), medium households 54,625 (8 percent) and large farms 10,764 (2 percent).

7.13.4. Flood Prone Area and crop damage

The field investigation was made immediately after the flood (last week of Aug and 1st week of Sep 2014) in the west bank of Jamuna/Brahmaputra river, so the researcher had opportunity to collect the area of Transplanted aman rice fully damaged by current flood from each of the Upazilas starting from Sirajganj Sadar to Kurigram Sadar. It is roughly about 40,000 ha, which could be treated as flood prone areas in the west zone of the Jamuna River.

The landscaping of project area is not quite different from other areas of the country only the area is reach in natural channels and narrow ridges due to high intensity of several big rivers (Brahmaputra, Jamuna, Teesta, Dharla, Dudhkumar, Karataya, and Bengali). The project area is endangered of seasonal floods averaged once in two years (as reported by local people) and especially in northern parts (upper region of Gaibandha and Kurigram) there is threat of sand-sediment that damaged the area for year round crop production for several years. Other crop production constraints includes river-erosion, siltation of canals and other water channels that caused drainage congestion, and unusual drought in some years caused low production of aus and aman rice, and all types of dry land crops like mustard, potato, sugarcane, chili, gram/corn, pulses and other oilseeds.

7.13.5. Crops and Cropping Patterns of the Project Area

Before construction of embankment in 1960's the predominant crop was deepwater rice in the floodplains during monsoon, and transplanted aman rice in ridges and comparatively upland areas that produced very low yield (1.0 to 1.5 t/ha). In the dry/winter season the crops were gram/corn, pulses especially grass pea, groundnut, mustard, and sesame. Most of the land in floodplains remain fallow in monsoon due to flood damage that seeded by grass pea (the poor man's crop). As a result people were very poor due to low productivity of land resources.

²⁸0-0.5 ac = landless; 0.50 -1.49 ac = marginal; 1.50 -2.49 ac = small; 2.50 -7.49 ac = medium; >7.49 ac = large

The cropping pattern is the sequence of crops grown in a particular plot in a particular year considering three cropping seasons. The country has three cropping seasons like a) Kharif II (monsoon: roughly July to Oct), b) Rabi (dry/winter season: roughly Nov to Feb) and c) Kharif I (pre-monsoon: roughly March to June). The cropping pattern is not a static system rather dynamic and varies from year to year, plot to plot, location to location depends upon weather and market price of crop products. The major cropping patterns in the project area as reported by DAE are presented in **Table 7.29** below by land types and cropping seasons; **Figure 7.4** shows the cropping pattern in the study area. The predominant cropping pattern in the project area is Boro rice – Fallow – Transplanted aman rice that covers 36 percent of the net cropped area. Other dominant pattern is Boro – Fallow – Fallow and Mustard – Boro – Transplanted aman rice/Fallow pattern. Wheat, maize and jute are also common crops found in the area during transect/farm walk.

Table 7.29: Major Cropping Pattern of the project area by land types

Land Type	Cropping season			Area coverage (ha)	Percent of Net Cropped Area
	Kharif I (Mar - June)	Kharif II (Jul - Oct)	Rabi (Nov - Feb)		
High land (F0)	Vegetable	Fallow	Vegetable	2094	0.86
	Fallow	Fallow	Maize	930	0.38
	Jute	Fallow	Maize	3306	1.36
	Jute	Fallow	Chili	4500	1.85
	Jute	Fallow	Pulses	3704	1.52
	Aus rice	Fallow	Chili	2054	0.84
	Sugarcane		Chili	1700	0.70
	Fallow	Fallow	Gram/Corn	2315	0.95
Sub-Total				20603	8.46
Medium High Land (F1)	Fallow	T. Aman	Boro	122546	50.33
	Jute	T. Aman	Maize	3743	1.54
	Boro	T. Aman	Potato	3350	1.38
	Jute	T. Aman	Vegetable	2980	1.22
	Fallow	T. Aman	Gram/Corn	2835	1.16
	Jute	T. Aman	Boro rice	7633	3.13
	Jute	T. Aman	Wheat	5050	2.07
	Boro	T. Aman	Mustard	15092	6.20
	Fallow	T. Aman	Wheat	5532	2.27
	Maize	T. Aman	Potato	1400	0.58
	Jute	T. Aman	Potato	1120	0.46
	Vegetable	Vegetable	Boro	1500	0.62
Sub-Total				172781	70.96
Medium Low Land (F2)	Fallow	T. Aman	Pulses	5226	2.15
	Jute	Fallow	Maize	5340	2.19
	Jute	Fallow	Mustard	2350	0.97
	Jute	Fallow	Pulses	6530	2.68

Land Type	Cropping season			Area coverage (ha)	Percent of Net Cropped Area
	Kharif I (Mar - June)	Kharif II (Jul - Oct)	Rabi (Nov - Feb)		
	T. Aus	T. Aman	Boro		
				7055	2.90
Sub-Total				26501	10.88
Low Land (F3)	Fallow	Fallow	Maize	3490	1.43
	Fallow	Fallow	Peanut	1970	0.81
Very Low Land (F4)	Fallow	Fallow	Boro	13627	5.60
Total				235482	96.72
Other Minor Cropping Patterns				7986	3.28
Grand Total				243468	100

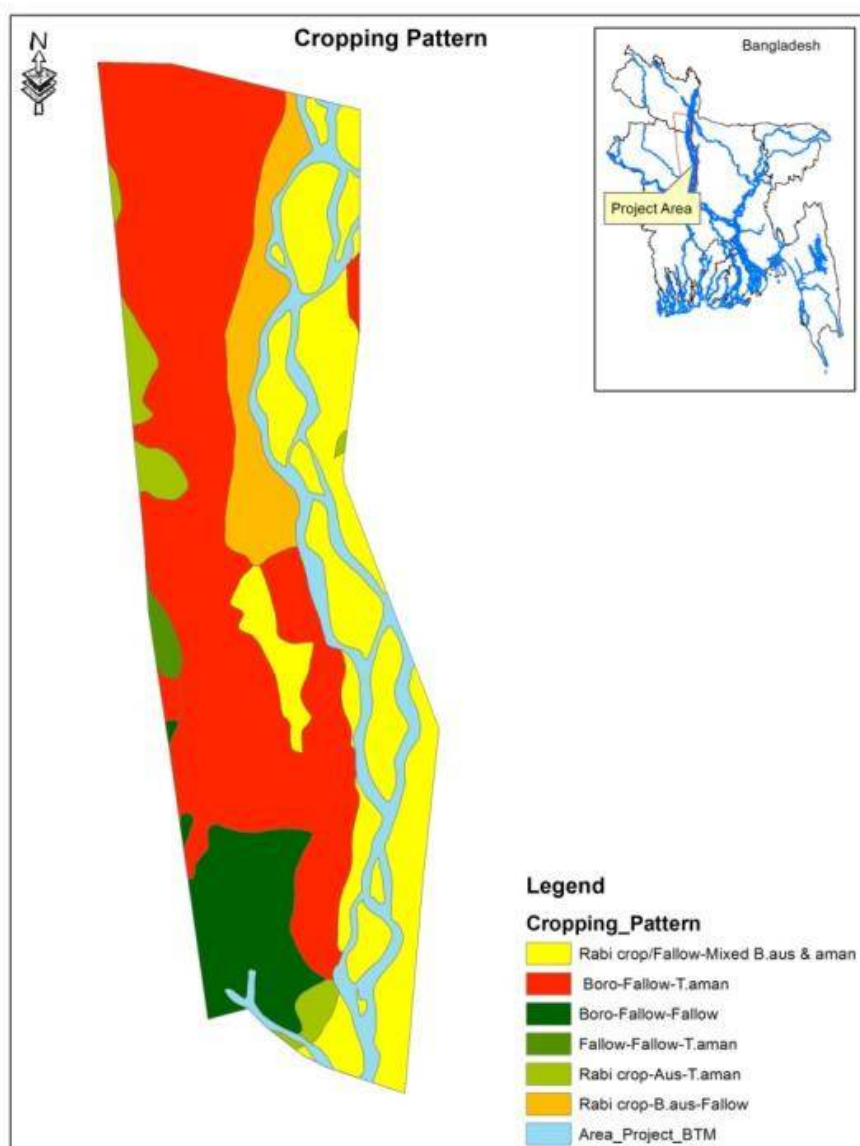


Figure 7.4: Cropping Pattern in the Area

7.13.6. Land Use Intensity and Cropping Intensity

The land use intensity (74 percent) is calculated based on the available cultivable land against the total area of the project area (the areas of Upazilas adjacent to the west bank of Brahmaputra/Jamuna is considered as influenced area of the project). It indicates that 74 percent of the land area is suitable for agricultural cultivation and the rest areas are being used for other purposes (settlements, rivers/water bodies, roads). The cropping intensity (211 percent) is the percentage of total cropped area against net cropped area, which found fairly higher than the country's average²⁹ (190 percent). Of the net cropped area 70 percent is double cropped, 21 percent triple cropped and only 9 percent single cropped area (**Table 7.30**). The data indicates higher agricultural productivity of the area. But still there is room for further improvement in production by increasing area of T. Aman during monsoon.

Table 7.30: Land use and cropping intensity in the project area in 2013-14

Land Type	Total project area	Land Area (ha)					
		Total Cultivable land	Single cropped area	Double cropped area	Triple cropped area	Net cropped area (NCA)	Total Cropped Area
High land			3245	17358		20603	37961
Medium high land				130913	41868	172781	387430
Medium low land				19446	7055	26501	60057
Low land			5460			5460	5460
Very low land			13627			13627	13627
Total	342326	253006	22332	167717	48923	238972	504535
Coverage of NCA by percent			9	70	21	100	
Cropping Intensity (percent)		211					
Land use intensity (percent)		74					

7.13.7. Crop Economics

The average yield level of major crops growing in the concerned Upazilas was plotted in the following table 3.6. The yields of crops were estimated by arranging FGD sessions with 10-12 selected potential farmers through SAAO of DAE in several locations of each of the Upazilas.

In all locations farmers are invariably growing HYVs in case of boro rice, T. Aman rice and other dry land crops including maize, wheat, oilseeds and vegetables. As reported by the respondents they are harvesting fairly good yields per unit area in case of rice (boro and T. Aman), wheat, maize, tomato, and potato (**Table 7.31**). These yields of crops will

²⁹Krishi diary 2014 published by Agriculture Information Service, DAE, Khamarbari, Dhaka.

be used to estimate the production loss/gain in the area due to re-construction of proposed embankment.

Table 7.31: Economic analysis of major crops grown in the RBIP area

Crop	Yield t/ha	Production cost (Tk/ha)	Gross income (Tk/ha)	Net income (Tk/ha)
Boro rice	5.87	78268	104620	26352
T. Aman rice	3.91	48072	73290	25217
Wheat	3.11	42608	66134	23527
Maize	8.74	74100	101406	36568
Jute	2.82	50388	102629	52241
Mustard	0.82	16302	30566	14264
Tomato	44.46	211185	444600	233415
Potato	17.78	109298	143569	34271
Chili	0.00	100406	192660	92255
Pointed gourd	0.00	155610	555750	188214

Source: In-depth interview

The production costs of different crops in the locality as reported by the farmers are shown in **Table 7.31** by crops. The cost is found comparatively higher with vegetable crops followed by boro rice, maize and other crops, which passively related with the input use during growing period that directly corresponds to the financial base of the producers. Gross incomes of crops under cultivation by the local farmers are also plotted in **Table 7.31**. The gross income of crops largely varies with the market price and yields. In gross income from same crop varies with locations, which is more pronounced in case of perishable vegetables. Higher net incomes of crops per unit area are found from tomato and pointed gourd. Considering economic return maize is found better than wheat while rice showed marginal rate of return. The scenarios of crop economics in project areas are not unlikely to other areas of the country.

7.13.8. Irrigation Coverage

Traditionally people used to put irrigation water to potato, and chilies. in dry season by using hand pumps or other local devices. Cultivation of boro rice in dry/winter season using river/canal and underground water through Low Lift Pimp (LLP), Shallow Tube Well (STW) and Deep Tube Well (DTW) started in 1960,s during green revolution and extends to other crops like wheat, potato, oilseeds in 70s. In mid 80s irrigated area expanded rapidly when installation of LLP, STW and DTW put under private ownership. Rice production increased by three folds due to use of technology and input especially irrigation to boro rice.

The project area is fairly good in coverage of area under irrigation. The area under irrigation with types of pumps used is shown in the following table by collecting information from local Department of Agricultural Extension (DAE) offices. The mean

irrigated area in dry season is observed 71 percent with variation among districts (table). Coverage is high (64 percent) with Shallow Tube Well (STW) followed by Deep Tube Well (6 percent) and Low Lift Pump only 1 percent (**Table 7.32**).

Table 7.32: Irrigation coverage by type of pumps and their numbers in RBIP area

District	Irrigated area (ha)	Net cropped area (ha)	Coverage of irrigated area of net cropped area by irrigation pumps (%)			
			DTW	STW	LLP	Total
Sirajganj	25965	48294	12	42	0.16	54
Bogra	32434	43875	2	69	2.48	74
Gaibandha	67622	88352	7	69	1.18	77
Kurigram	47630	62956	4	71	0.54	76
All	173651	243477	6	64	1.05	71

Source: Upazila Agriculture Office of DAE (Department of Agricultural Extension)

The existing numbers of irrigation equipment (sources of irrigation) are being using in the concerned Upazilas of the districts with command area/unit of pump (i.e. efficiency) is calculated based on existing secondary data. The command area per DTW in the project area is ranged from 20-25 ha, STW 1.2 to 3.5 ha and LLP 2.5 to 10.5 ha (see **Table 7.33**).

Table 7.33: Existing numbers of irrigation pumps being used in the RBIP areas (Districts)

District	DTW		STW		LLP		Total	
	# Unit	Command area/unit (ha)	# Unit	Command area/unit (ha)	# Unit	Command area/unit (ha)	# Unit	Command area/unit (ha)
Sirajganj	226	25	16891	1.20	28	2.68	17145	1.51
Bogra	47	20	22158	1.37	86	12.67	22291	1.46
Gaibandha	241	25	24758	2.45	122	8.56	25121	2.69
Kurigram	129	20	12511	3.58	32	10.53	12672	3.76
All	643	24	76318	2.04	268	9.50	77229	2.25

Source: Upazila Agriculture Office of DAE (Department of Agricultural Extension)

7.13.9. Agricultural Inputs

The farmers in the project area are using large amount of chemical fertilizers as of other areas of the country. The rate of fertilizer use per ha generally varies from farm to farm based on fertility status of plot and financial base of the producers. The major chemical fertilizers used in the area are Urea, TSP, MoP and Gypsum. Urea is widely used in boro rice, potato, maize, jute and other crops. The use of pesticides depends on the degree of pest infestation. The major insects as reported by the farmers are stem borer, gal midge, leaf roller, rice bug, rice hispa, brown plant hopper and caterpillar for rice crop. Different types of fungus damages the Rabi crops. Local farmers reported that they are using

different types of pesticides and fungicides to prevent pest infestation in croplands. Pesticides are used as granular and liquid form in different doses varies from farmer to farmer. It was hard to collect the actual amount used per unit area of crop land, so the cost per unit area of land for pesticides collected and shown in **Table 7.34**.

Table 7.34: Rate of fertilizer/pesticides used in different major crops in 2013-14

Name of the Crop	Fertilizer used (Kg/ha)				Pesticide used (Tk/ha)			
	Urea	TSP	MoP	Gypsum	Insecticide	Fungicide	Herbicide	Total
HYV Boro Rice	268	132	132	60	1647	2620	2133	6400
HYV T. Aman Rice	183	126	81	49	455	530	1123	2108
Jute	248	33	123		2620		449	3069
Maize	469	139	139	75	1796			1796
Wheat	268	136	66	117	1029	1123	1123	3275
Potato	254	67	124	60	1684	1684	748	4117
Mustard	62	40	32	13	1123			1123
Chilies	472	281	206	56	4865		1347	6212

Source: FGD in project area in Sep 2014

Table 7.35 shows the actual amount of chemical fertilizers used in the Upazilas supposed to be the project area for RBIP. The data was collected from Upazila Agriculture Office of each of the Upazila. These data collected to measure the impact of different fertilizer on soil health.

Table 7.35: Chemical Fertilizer Used in Project Area in 2013-14

Name of fertilizer	Total amount used (MT)	Percent of Total Use
Urea	78982	59
TSP	15777	12
DAP	14152	11
MOP	15363	11
NPKS	1125	1
Gypsum	4715	4
Zinc sulfate	1997	1
Mag. Sulfate	1194	1
Boric	653	0
Total	133958	100

Source: Upazila Agriculture Office of DAE in Project area

Use of chemical fertilizer in crops increased rapidly in 80's after introduction of hybrids/HYVs in rice (boro, aman and aus). Vegetable production in the country increased by several folds by last 3 decades with the introduction of hybrids and HYVs

that resulted increased use of fertilizers too. Massive extension works motivated the farmers in using chemical fertilizers in cereals, oilseeds, fruit crops and all sorts of vegetables. Consumption of chemical fertilizers also increased with extension of maize cultivation in 90s. So time has come to investigate the limitations of lavish use of chemical fertilizers in soil.

8. Climate Change

This chapter describes the predicted climate change scenarios for Bangladesh and also their implications for RBIP.

8.1. Overview

The Intergovernmental Panel on Climate Change (IPCC) defines climate change as ‘a change in the state of the climate that can be identified (e.g. using statistical tests) by changes in the mean and/or the variability of its properties, and that persists for an extended period, typically decades or longer’ (Glossary of words, IPCC Fifth Assessment Report 2014).

Climate change and climate variability is becoming an increasingly complex challenge worldwide but the solutions required and adaptations to be applied are mostly local. Appropriate anticipatory long-term strategies rather than short term reactionary responses are necessary to moderate the impacts of climate change. Since the hydrological cycle and hydrological systems are closely linked with climate and climatic parameters, it is important to address climate change concerns related to this project. This chapter gives an overview of observations of climate change at global and national level and briefly discusses the impacts on the project area and its surroundings.

8.2. Global Context

Recent trends in the Earth’s climate clearly indicate that global mean surface temperatures have been increasing and it is very likely this change is due to anthropogenic reasons. In order to understand the magnitude of these changes at the global level and thereby the severity of the problem the IPCC (IPCC, Fifth Assessment Report, 2013) scientific assessment on climate change and climate variability is given below.

8.2.1. Warming of the Planet

- Eleven of the twelve years in the period (1995–2006) rank among the top 12 warmest years in the instrumental record (since 1880).
- Warming in the last 100 years has caused about a 0.85°C increase in global average temperature. This is up from the 0.6°C increase in the 100 years prior to the Third Assessment Report.
- Urban heat island effects were found to have negligible influence (less than 0.0006°C per decade over land and zero over oceans) on these measurements.(Forth IPCC synthesis report, 2007)
- Observations since 1961 show that the ocean has been absorbing more than 80 percent of the heat added to the climate system, and that ocean temperatures have increased to depths of at least 3000 m (9800 ft).
- Average Arctic temperatures increased at almost twice the global average rate in the past 100 years.
- It is likely that greenhouse gases would have caused more warming than we have observed if not for the cooling effects of volcanic and human-caused aerosols.
- Average Northern Hemisphere temperatures during the second half of the 20th century were very likely higher than during any other 50-year period in the last 500

years and likely the highest in at least the past 1300 years (including both the Medieval Warm Period and the Little Ice age)

8.2.2. Ice, Snow, Permafrost, Rain, and Oceans

Mountain glaciers and snow cover have declined on average in both hemispheres.

Losses from the land-based ice sheets of Greenland and Antarctica have very likely (>90 percent) contributed to sea level rise between 1993 and 2003.

Ocean warming causes seawater to expand, which contributes to sea level rising.

Sea level rose at an average rate of about 1.7 mm/year during the years 1901-2010. The rise in sea level during 1993-2010 was at an average rate of 3.2 mm/year. It is not clear whether this is a long-term trend or just variability.

It is very likely that the annual Antarctic sea ice extent increased at a rate of between 1.2 and 1.8 percent per decade (0.13 to 0.20 million km² per decade) between 1979 and 2012 (very high confidence).

8.2.3. Hurricanes

- There has been an increase in hurricane intensity in the North Atlantic since the 1970s, and that increase correlates with increases in sea surface temperature.
- The observed increase in hurricane intensity is larger than climate models prediction for the sea surface temperature changes we have experienced.
- There is no clear trend in the number of hurricanes.
- Other regions appear to have experienced increased hurricane intensity as well, but there are concerns about the quality of data in these other regions.
- It is more likely than not (>50 percent) that there has been some human contribution to the increases in hurricane intensity.
- It is likely (>66 percent) that we will see increases in hurricane intensity during the 21st century (*Fourth IPCC synthesis report, 2007*).

8.2.4. Model-based Projections for the Future

Climate Change Model global projections are made based on an analysis of various computer climate models running under different scenarios that were established in 2000 in the Special Report on Emissions Scenarios (SRES). As a result, predictions for the 21st century are shown below.

- Best estimate for a "low scenario" is 1.8°C with a likely range of 1.1 to 2.9°C (3.2°F with a likely range of 2.0 to 5.2°F)
- Best estimate for a "high scenario" is 4.0°C with a likely range of 2.4 to 6.4°C (7.2°F with a likely range of 4.3 to 11.5°F)
- A temperature rise of about 0.1°C per decade would be expected for the next two decades, even if greenhouse gas and aerosol concentrations were kept at year 2000 levels.
- A temperature rise of about 0.2°C per decade is projected for the next two decades for all SRES scenarios.

- Confidence in these near-term projections is strengthened because of the agreement between past model projections and increased observed temperature.
- Based on multiple models that all exclude ice sheet flow due to a lack of basis in published literature, it is estimated that sea level rise will be: in a low scenario 18 to 38 cm (7 to 15 inches) and in a high scenario 26 to 59 cm (10 to 23 inches)
- It is very likely that there will be an increase in frequency of warm spells, heat waves and events of heavy rainfall.
- It is likely that there will be an increase in areas affected by droughts, intensity of tropical cyclones (which include hurricanes and typhoons) and the occurrence of extreme high tides.
- "Sea ice is projected to shrink in both the Arctic and Antarctic ... In some projections, Arctic late-summer sea ice disappears almost entirely by the latter part of the 21st century" (Fourth IPCC synthesis report, 2007).

8.3. Climate Change in Bangladesh

Bangladesh is globally known as one of the most vulnerable countries to climate change. Due to its geographical location and setting, Bangladesh already experiences frequent natural disasters, which causes damage to infrastructure and economic assets; adverse impacts on lives and livelihoods; and many cases even leads to loss of life. Climate change will exacerbate many of the current problems and natural hazards the country faces. Floods, droughts, tropical cyclones and storm surges are likely to become more frequent and severe in coming years.

8.4. Observed changes in climate in Bangladesh

Analysis of climatic data from different stations of Bangladesh Meteorological Department from 1967 onwards shows a clear sign of climate change and climate variability.

8.4.1. Temperature

It has been observed that pre and post monsoon mean temperature is rising in more than two-third of the meteorological stations and particularly in the coastal region more than 80 percent stations are showing rising trends in temperature (Mukherjee and Khan, 2009). Temperature data of a 40 year period (1967-2007) shows increasing trend of 0.4°C - 0.65°C. Over the past few decades, a warmer winter is being experienced by the country with an average of 0.45°C increase in the minimum temperature. Similar to this, more hot summer is also experienced during the pre-monsoon and monsoon seasonal months when a prominent rise in the maximum and minimum temperature is observed over the last few decades (Rahman et al, 2011). See **Figure 8.1** for the temperature trends in Bangladesh.

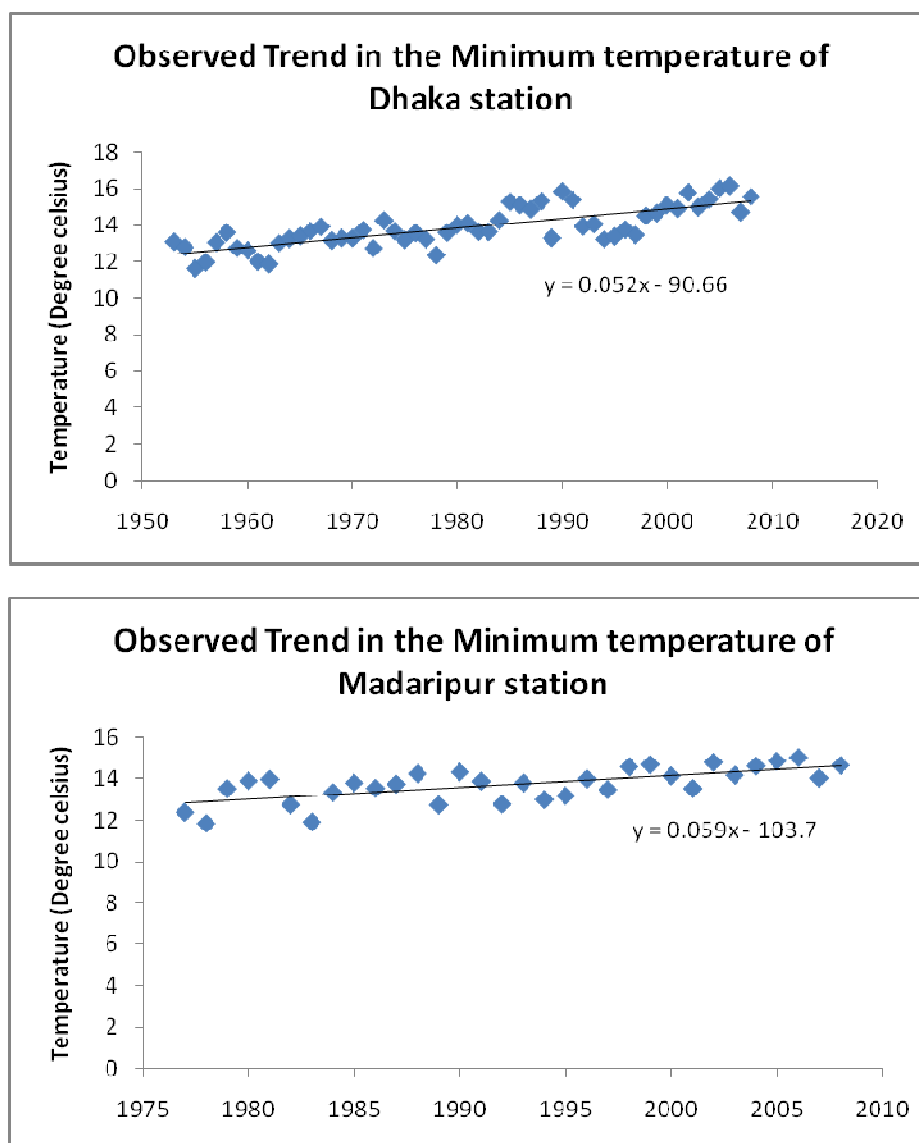


Figure 8.1: Observed trend in minimum temperature
(Source: Bangladesh Meteorological Department)

8.4.2. Rainfall

Observations from 32 rainfall stations show an overall increase in the mean seasonal rainfall, with around 100 mm increase in the mean seasonal rainfall in monsoon (June-July-August). Increase in the pre-monsoon (March-April-May) and post-monsoon (September-October-November) seasonal rainfall is also evident in 30 out of 32 stations of Bangladesh Meteorological Department (Rahman et al, 2011).

Moreover, the frequency of extreme rainfall events has also increased over the recent years. The highest recorded rainfall for any month in the capital for a 24-hour period was 341mm in September 2004. Again more recently, 448 mm rainfall was recorded during 24 hours in Dhaka on 27 July, which was the highest rainfall in the history of Dhaka. 290 mm rainfall was recorded during 8 hours from 11 pm on 27 July to 7 am on 28 July 2009.

It marks the highest recorded rainfall for the month since July 13, 1956, when 326mm was recorded in Dhaka.

8.4.3. Sea level rise

Tide gauge measurements and more recently satellite altimeter observations show a definite increase of sea level change. Water level data from the past few decades show that, in the south western (Sunderban) and south eastern part (Cox's Bazar) of Bangladesh there is an indication of sea level rise. In the absence of off-shore water level measuring stations data from these coastal monitoring stations can give an indication of sea level rise as these stations are situated in tidal dominated rivers and are mostly free from any sort of artificial or man-made interventions. The observed range of water level variance can be taken as 5.05 mm to 7.4mm/yr; see **Figure 8.2**.

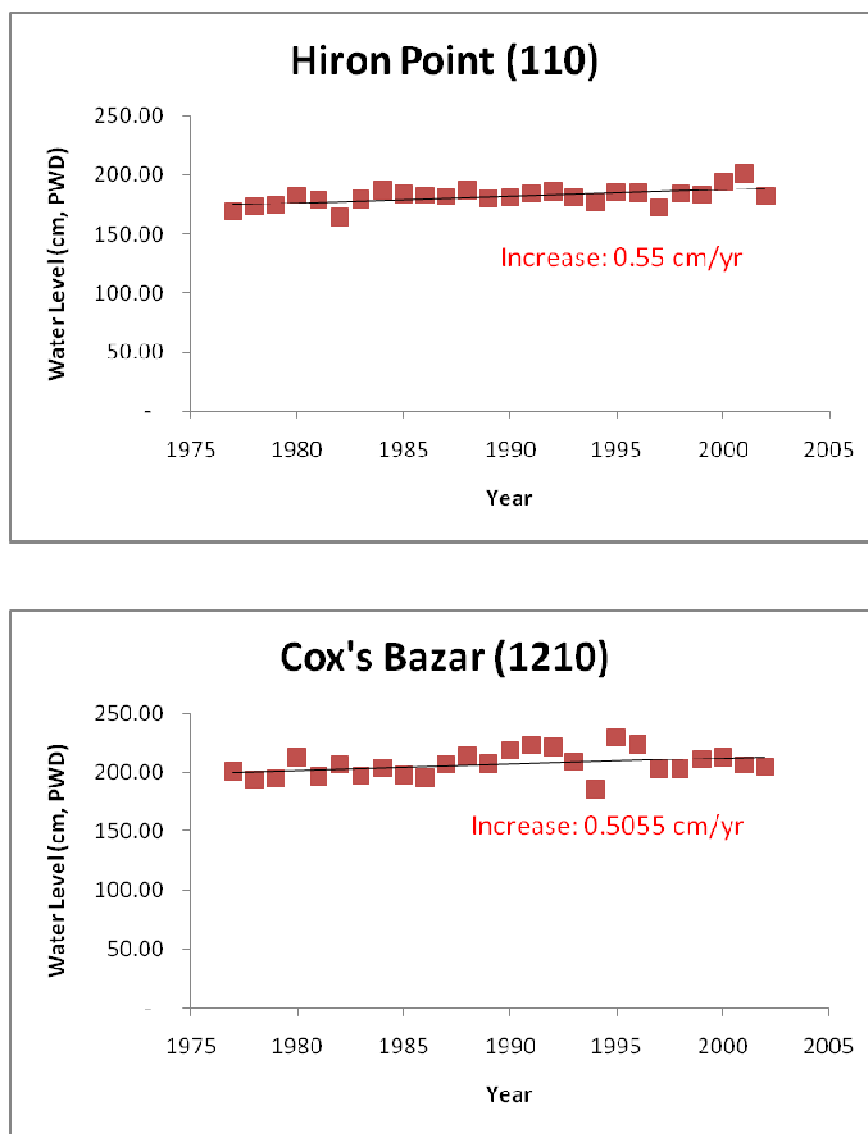


Figure 8.2: Observed trend in sea level rise as evident from different tidal stations along the coast (Source: CEGIS, 2010)

8.5. Predicted changes in climate in Bangladesh

Climate change projections for Bangladesh available through studies carried out on regional scale by IPCC (2007), IWM (2008), CEGIS (2008) and CEGIS (2014) conclude that, climate change may result in the increased rainfall intensities, rise of future sea levels, and higher temperature and wind speeds. These changes may in turn result in to increased flood volumes, river water levels and velocities, which are all factors that may affect the design of the RBIP. Studies show that climate change induced alterations in precipitation in Bangladesh and upstream areas will alter the frequency, the magnitude and the areal extent of flooding in Bangladesh significantly due to:

- Possible changes in temperature, precipitation and evapo-transpiration may result in the change in soil moisture, groundwater recharge and runoff and could severely impact the hydrograph and onset, intensity and recession of floods.
- Increased rainfall intensity during pre-monsoon is especially critical for areas experiencing flash floods.
- Change in the frequency and intensity in extreme rainfall event may subsequently increase flood affected area
- Rise in the sea level may cause the backwater effect causing the rise in the river water level, or obstacle the upstream discharge to be drained off into the sea and increase duration of floods
- The timing of peaking in the major rivers may also change, which may in turn change the likelihood of synchronization of flood peaks of major rivers

Statistical analysis of historical time series of flows in major rivers shows frequency of moderate flood has increased considerably from early eighties (IWM, 2008). A number of hydrological models (empirical and water balance modeling carried out by Mirza and Ahmed, 2005; Tanner et al., 2007; IWM and CEGIS, 2008; IWM 2008, etc) have been used to assess the impact of climate change on the riverine flooding of Bangladesh. Most studies show, extreme peak river-discharges are likely to occur more frequently. IWM (2008) models predict that inundated area will increase by 12 to 16 percent in the Ganges and Jamuna basin for average or normal flood and peak flood level will increase by about 37cm in a moderate flood event the increase is 27cm in the Jamuna river (**Figures 8.3 and 8.4**). The same study predicts that the duration of flood level will also be prolonged.

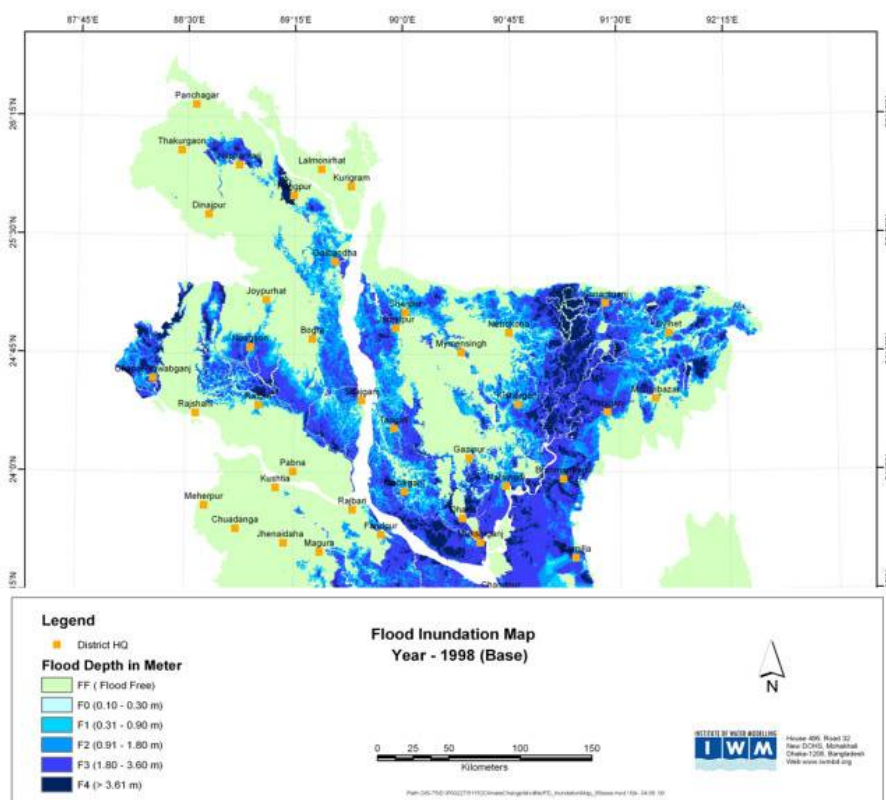


Figure 8.3: Peak flood flow map for base condition, 1998 flood

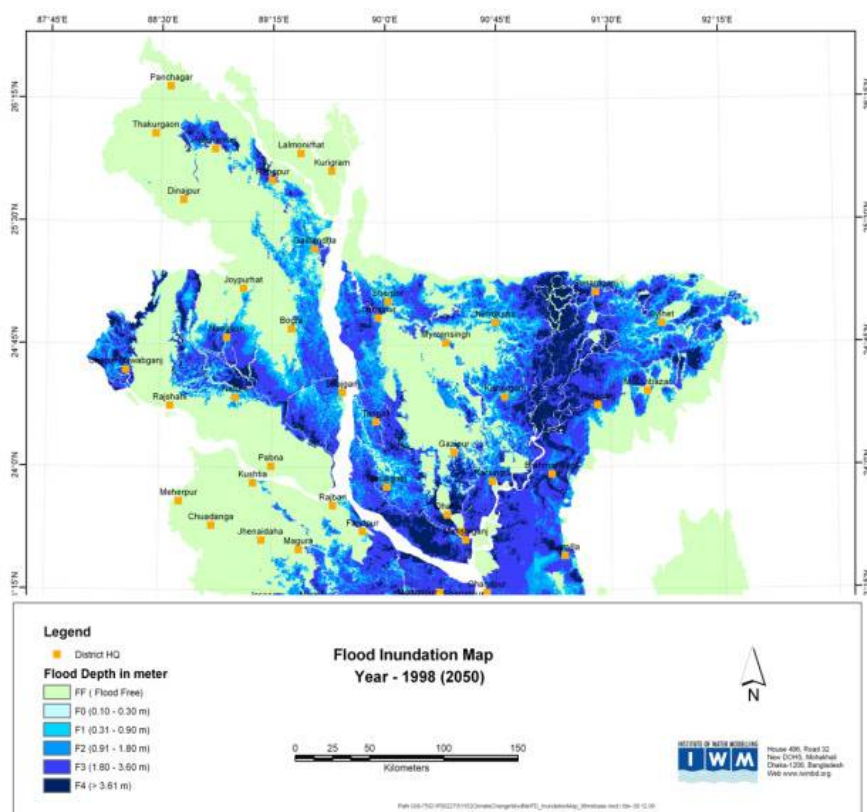


Figure 8.4: Peak flood flow map for 2050 with climate change

8.6. Predicted Climate Change Impacts and Adaptation Strategy for Project Area

There is an uncertainty in the projections of different climatic models as the estimates tend to vary, still a distinct trend in the predictions can be established. Most climate models (GCMs) estimate an increase in temperature and annual precipitation in the South Asian region. Increases are predicted to be more pronounced particularly during the monsoon period. The following predictions have been considered to identify impacts and adaptations to climate change,

Rainfall projections: The monsoon rainfall is predicted to increase by 5 percent in 2039 and by 13 percent in 2069. Due to climate change the maximum rainfall may increase, for a 100-year return period event, to 372 mm for 1-day period and to 514 mm for 2-day period. The increased rainfall intensities can affect the entire hydrology of the Ganges Brahmaputra Meghna region. The regulators or any other hydraulic structures for road works should be designed considering increased rainfall and flood volumes from climate change.

Future sea level rise: Sea level rise in the Bay of Bengal is the combined effect of global sea level rise, local changes in sea level due to ocean density and circulation changes and possible subsidence or uplift of the delta. Three possible scenarios for sea level rise in the year 2100 are: (i) a high-end, low-probability estimate of sea level rise of 0.98 m; (ii) a low-end estimate of sea level rise of 0.26 m; and (iii) a pragmatic mid-range estimate of sea level rise of 0.60 m. The influence of water level rise from these three scenarios would not expect to reach up to RBIP site, which is located about 400 km inland.

Temperature projections: Maximum, mean and minimum temperatures can rise between 2° and 4° C by the year 2100. The maximum temperature can reach values of 43.9° C in 2050 and 46.6 ° C in the year 2100 in the once in hundred year event.

Wind forces: Cyclone intensities may increase by 10 to 20 percent. Wind forces can increase to 110 km/hr and during cyclones even up to 126 km/hr.

Flood volumes: Based on flood frequency analysis of historical flows of Jamuna at Bahadurabad, the design discharge of RBIP, a flood event of 100 year return period, is estimated at 109,000 m³/s.

As mentioned earlier, due to climate change peak discharges at Bahadurabad are expected to increase. Different studies estimate this increase between 6 and 16 percent. Therefore, due to climate change, the flood discharge of 100 year return period would increase between 116,000 m³/s and 126,000 m³/s.

River water levels: Water levels and velocities of Jamuna will increase due to increased flood volumes. Table 1 shows, the water levels of the Jamuna river at Sirajganj corresponding to 100 year flood considering climate change (see **Table 8.1**).

Table 8.1: Water levels of the Jamuna river corresponding to 100 year flood

Location	Northing(m)	Predicted 100 year water Level (mPWD)	
		Based on Historic Flow	Considering climate change
Discharge(m³/s)		109,000	116,000
Sirajganj	706,000	15.5	15.8

Location	Northing(m)	Predicted 100 year water Level (mPWD)	
		Based on Historic Flow	Considering climate change
	717,000	16.6	16.9

Due to climate change, the river water levels in the RBIP area will further increase between 0.2 to 0.3 m for a 6 percent increase flood volumes and between 0.3 to 0.4 m for a 16 percent increase in flood volumes.

Effects on bed level and planform: The present braiding intensity of the Jamuna is about 2.5 with an average width of 12 km. Due to the increase of flood discharge by 20 percent, the depth of the river will be increased by 40 cm. If sediment load is lessened due to sediment management in the upstream basin, the riverbed will be lowered by the same amount but 18 cm will be compensated due to sea level rise and the net lowering of bed level will be 22 cm in the Jamuna River at Sirajganj. The river will become more braided with an intensity of 3 to 3.5.

Table 8.2: Effect of extreme scenarios for the Jamuna River

Worst case Scenarios	Bed level	Bank level	Rise of water level	Scour	Planform
Scenario 1: Combination of Q^+ and S^0 (long term)	Lowering >>40 cm	No change in Water level	No change in water level	More than the present estimation	Intensively braided Type 5
Scenario 2: Combination of Q^+ , S^{++} (long-term)	Rising >> 40 cm	Rising >> 40 cm	Rise of water level >>40 cm	Less than the present estimation	Meandering, Straight and Braided Type 1

Effects on riverbank erosion: Morphologists predict that the magnitude of riverbank erosion might be dependent on annual flood discharge. Increase in flood discharge by 20 percent within 100 years may increase the annual rate of riverbank erosion substantially. It has been predicted that if at present condition erosion rate of the Jamuna River is 2600 ha/yr after 50 years it will be 3100 ha/yr and after 100 years it will be 3600 ha/yr.

Effects on scour hole: Scouring of the river bed is a very important feature of a river. According to the Inglis model (1994), scour depth is the function of discharge and will increase as one-third power of discharge. Thus increase in discharge by 20 percent, would cause an increase of about 5 percent in the scour depth. It will certainly increase the cost of river training/bank protection works and also the maintenance of existing structures. With the changing of sediment regimes, scour depth may vary over time. The most critical condition would be when sediment load would be less.

8.7. Climate change adaptation in RBIP design

Climate change considerations have ultimately led to new design height of the RBIP embankment and improved drainage system. A 100-year flood is generally adopted in Bangladesh for design of major flood embankments and river training works.

Future climate change will increase peak discharges although magnitude and time frame is uncertain; associated velocity is expected to increase. On the other hand, morphological adjustment related to climate change will take time and complex responses in the fluvial system means that changes in the rate of adjustment are likely to be highly non-linear. In this context, as monsoon flood discharges are likely to increase gradually over the coming decades, the Jamuna should be able to accommodate the change through morphological adjustments (such as bed level lowering) that are able to keep pace with changes in the discharge driver.

Assuming time frame for assessing embankments and river training works is 30 years, and using the lower end of the climate change, a **6 percent increase to this 100-year flood** is considered for the design of RBIP to accommodate future flows from climate change.

The design water level for the embankments is proposed to increase to 0.5 m to accommodate increased water levels from climate change. Additional sensitivity analysis undertaken to confirm adequate freeboard is still available to account for more severe events over 50 to 100 years.

Thus a **freeboard of 1.5 m** is recommended to account for uncertainties in future hydrologic and morphological changes as well as wave runup.

9. Impact Assessment

This Chapter assesses the project for key environmental and social aspects, identifies significant potential impacts that may be caused by the project activities and proposes appropriate mitigation measures to address these impacts.

9.1. Potential Impacts - Overview

After its completion, the project is expected to have a multiple of very positive and beneficial effects on the people and economy of the area. First of all, the river bank protection will discontinue the recurring bank erosion and the associated loss of homesteads and cultivated land. Then, the improved embankment will also significantly reduce the flooding events and associated economic losses. Finally, the road constructed on the embankment will facilitate local mobility as well as long-distance transportation. All of these factors are likely to have very profound positive impacts on the local people and their economic condition. In addition, increased safety against river bank erosion and flooding as well as improved mobility and connectivity will bring in further development and investment in the area that is currently not possible because of the area vulnerability.

Most of the proposed interventions pertain to rehabilitation and improvement of the existing embankment and hence the potentially negative environmental impacts will primarily be limited to the construction activities.

The key potentially negative impacts and issues associated with the construction phase of the proposed project include changes in aquatic habitat because of riverbank protection works as well as from sand extraction from the river bank; changes in land form and land use because of rehabilitation of existing and construction of new embankment; land acquisition for construction of new embankment and resulting displacement of people; use of natural resources particularly river sand; health and safety risks associated with handling of hazardous materials and operation of construction machinery; air quality deterioration because of operation of construction vehicles and machinery as well as excavation activities; noise generation caused by the operation of construction machinery and vehicles; contamination of land and water caused by wastes generated from construction activities and camp operation; loss of trees that need to be removed for construction of embankment; risk of accidents associated with movement of construction vehicles and machinery; blockage of local routes caused by construction activities; and impacts on sensitive receptors such as schools along the embankment.

The potentially negative impacts associated with the O&M phase of the project include changes in river morphology caused by riverbank protection; changes in aquatic habitat caused by riverbank revetment; blockage of local routes caused by the embankment and road, effects on water bodies and associated habitats caused by disruption of hydrological and ecological connectivity between main river and internal rivers, beels and khals; noise generation and air quality deterioration caused by the vehicular traffic on the embankment road; risks of accidents associated with vehicular traffic on the embankment road; and increased usage of agro-chemicals caused by agricultural intensification due to enhanced protection against riverbank erosion and flooding.

9.2. Impact Assessment Methodology

The significance of potential impacts was assessed using the risk assessment methodology that considers impact magnitude and sensitivity of receptors, described below.

9.2.1. Impact Magnitude

The potential impacts of the project have been categorized as major, moderate, minor or nominal based on consideration of the parameters such as: i) duration of the impact; ii) spatial extent of the impact; iii) reversibility; iv) likelihood; and v) legal standards and established professional criteria. These magnitude categories are defined in **Table 9.1**.

Table 9.1: Parameters for Determining Magnitude

Parameter	Major	Medium	Minor	Nominal
Duration of potential impact	Long term (more than 35 years)	Medium Term Lifespan of the project (5 to 15 years)	Limited to construction period	Temporary with no detectable potential impact
Spatial extent of the potential impact	Widespread far beyond project boundaries	Beyond immediate project components, site boundaries or local area	Within project boundary	Specific location within project component or site boundaries with no detectable potential impact
Reversibility of potential impacts	Potential impact is effectively permanent, requiring considerable intervention to return to baseline	Baseline requires a year or so with some interventions to return to baseline	Baseline returns naturally or with limited intervention within a few months	Baseline remains constant
Legal standards and established professional criteria	Breaches national standards and or international guidelines/obligations	Complies with limits given in national standards but breaches international lender guidelines in one or more parameters	Meets minimum national standard limits or international guidelines	Not applicable
Likelihood of potential impacts occurring	Occurs under typical operating or construction conditions (Certain)	Occurs under worst case (negative impact) or best case (positive impact) operating conditions (Likely)	Occurs under abnormal, exceptional or emergency conditions (occasional)	Unlikely to occur

9.2.2. Sensitivity of Receptor

The sensitivity of a receptor has been determined based on review of the population (including proximity / numbers / vulnerability) and presence of features on the site or the surrounding area. Each detailed assessment has defined sensitivity in relation to the topic. Criteria for determining receptor sensitivity of the Project's potential impacts are outlined in **Table 9.2**.

Table 9.2: Criteria for Determining Sensitivity

Sensitivity Determination	Definition
Very Severe	Vulnerable receptor with little or no capacity to absorb proposed changes or minimal opportunities for mitigation.
Severe	Vulnerable receptor with little or no capacity to absorb proposed changes or limited opportunities for mitigation.
Mild	Vulnerable receptor with some capacity to absorb proposed changes or moderate opportunities for mitigation
Low	Vulnerable receptor with good capacity to absorb proposed changes or/and good opportunities for mitigation

Assigning Significance. Following the determination of impact magnitude and sensitivity of the receiving environment or potential receptors, the significance of each potential impact has been established using the impact significance matrix shown below in **Table 9.3**.

Table 9.3: Significance of Impact Criteria

Magnitude of Impact	Sensitivity of Receptors			
	Very Severe	Severe	Mild	Low
Major	Critical	High	Moderate	Minimal
Medium	High	High	Moderate	Minimal
Minor	Moderate	Moderate	Low	Minimal
Nominal	Minimal	Minimal	Minimal	Minimal

9.3. Summary of Assessed Impacts

The project's potential impacts on the important environmental and social components (IESCs) have been assessed and their significance determined using the methodology described in **Section 9.2** above. The listing of IESCs, a summary of the potential impacts of the project on these IESCs, and significance of these impacts are presented in **Table 9.4**; the potential impacts are discussed in the subsequent sections.

Table 9.4: Summary of Potential Impacts and their Significance

Potential Impacts on IESCs	Duration of Impact	Spatial Extent	Reversible or not	Likelihood	Magnitude	Sensitivity	Significance Prior to Mitigation	Significance after Mitigation
Control of Riverbank Erosion	Long term	Local	Yes	Certain	Major	-	High positive	High positive
Improved flood protection	Long term	Local	Yes	Certain	Major	-	High positive	High positive
Impacts related to Project siting								
Land cover and land use changes	Long term	Local	No	Certain	Major	Mild	Moderate negative	Low negative
Loss of natural vegetation and trees	Long term	Local	Yes	Certain	Major	Mild	Moderate negative	Low negative
Loss of riverbank/aquatic habitat	Long term	Local	No	Likely	Medium	Mild	Moderate negative	Low negative
Loss of flood plain habitat	Long term	Local but beyond project foot print	No	Certain	Major	Severe	High negative	Low negative
Land acquisition and resettlement	Long term	Local	No	Certain	Major	Severe	High negative	Low to moderate negative
Loss of agriculture	Long term	Local	No	Certain	Major	Severe	High negative	Low to moderate negative
Blocked access because of road and embankment	Long term	Local but beyond project foot print	No	Certain	Major	Mild	Moderate negative	Low negative
Improved road connectivity	Long term	Local	No	Certain	Major	-	High positive	High positive
Environment impacts during construction phase								
Impacts of borrowing of material	Short term	Local	Yes	Certain	Major	Severe	High negative	Low negative

Potential Impacts on IESCs	Duration of Impact	Spatial Extent	Reversible or not	Likelihood	Magnitude	Sensitivity	Significance Prior to Mitigation	Significance after Mitigation
Air pollution	Short term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Noise	Short term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Water pollution	Short term	Local	Yes	Certain	Major	Severe	High negative	Low negative
Soil contamination	Short term	Local	Yes	Certain	Major	Severe	High negative	Low negative
Solid wastes and hazardous wastes	Short term	Local	Yes	Certain	Major	Severe	High negative	Low negative
Impacts on aquatic habitat	Short term	Local	Yes	Certain	Major	Severe	High negative	Low to moderate negative
Impacts on floodplain habitat	Short term	Local	Yes	Certain	Major	Severe	High negative	Low negative
Impacts on <i>charland</i> habitat	Short term	Local	Yes	Unlikely	Minor	Low	Minimal	Minimal
Site clearance and restoration	Short term	Local	Yes	Likely	Medium	Severe	Moderate negative	Low negative
Social impacts during construction phase								
Impacts on cultural heritage	Short term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Impacts on community facilities	Short term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Occupational health and safety	Short term	Local	Yes	Certain	Major	Severe	High negative	Low to moderate negative
Community health and safety	Short term	Local	Yes	Certain	Major	Severe	High negative	Low to moderate negative
Environmental impacts during O&M								
Changes in river morphology	Long term	Local	No	Likely	Nominal	Severe	Minimal Negative	Minimal

Potential Impacts on IESCs	Duration of Impact	Spatial Extent	Reversible or not	Likelihood	Magnitude	Sensitivity	Significance Prior to Mitigation	Significance after Mitigation
								negative
Loss of ecological connectivity	Long term	Local	No	Certain	Major	Severe	High negative	Low negative
Drainage congestion and water logging	Long term	Local	No	Likely	Medium	Mild	Moderate negative	Low negative
Generation of solid waste	Long term	Local	Yes	Certain	Major	Severe	High negative	Low negative
Air pollution	Long term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Noise generation	Long term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Water pollution	Long term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Risk of embankment breaches	Long term	Local but beyond project foot print	Yes	Likely	Major	Very Severe	Critical	Low to moderate negative
Social impacts during O&M								
Changes in agricultural pattern	Long term	Local	Yes	Likely	Medium	Mild	Moderate negative	Low negative
Community health and safety	Long term	Local	Yes	Certain	Major	Severe	High negative	Low to moderate


9.4. Impact Assessment and Mitigation for Important Environmental and Social Components

The potential impacts of the project on the important environmental and social components (IESCs) are discussed below.

9.4.1. Significant Environmental Impacts from Project Siting

9.4.1.1. Control of River Bank Erosion

During the last four to five decades, Jamuna river has been undergoing strong metamorphosis in width, bank erosion, braiding intensities. Recent researches suggest that sediment slugs generated by 1950 Assam earthquake was the main driver for those rapid changes. In particular, the riverbank erosion has been resulting in loss of valuable land along both of the river banks (see **Figure 9.1** below).

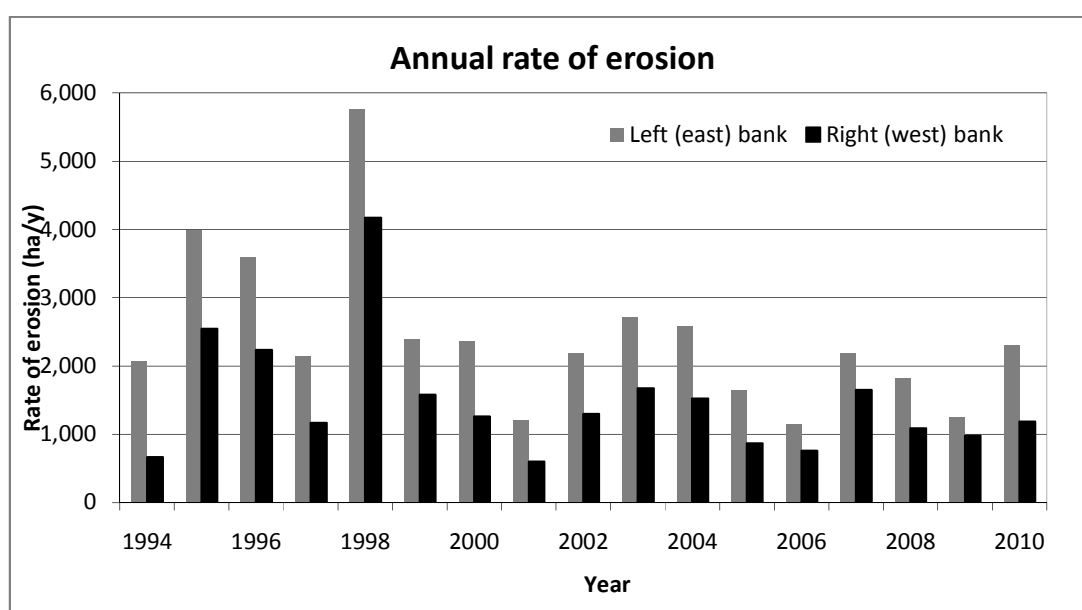

Source: Fichtner/BWDB. 2014.

Figure 9.1: Erosion along Jamuna Banks

Along the priority reach, the average rate of riverbank erosion during last 40 years has been about 6 ha per km per year, resulting in loss of about 15,700 ha of valuable land during the period (see **Tables 9.5** and **9.6**). Along the same reach, another 6,000 ha may be lost due to riverbank erosion during next 30 years if no measures are taken to arrest the trend (see **Table 9.7**) (Fichtner/BWDB. 2014).

The riverbank erosion not only causes loss of land, but also attacks the already dilapidated BRE, causing frequent breaches that in turn result in flooding of the BRE-protected floodplain causing substantial losses to private and public assets as well as crops and cultivation fields.

Table 9.5: Yearly Erosion Rate along Jamuna Right Bank

Reach	Length (km)	1830-1914 (ha/km/y)	1914-1953 (ha/km/y)	1953-1973 (ha/km/y)	1973-2014 (ha/km/y)
Reach 1(Teesta to Gaibandha)	23	3	18	3	2
Reach 2 (Gaibandha Sariakandi)	42	5	9	0	4
Reach 3 (Sariakandi to Sirajganj) (Priority Reach)	59	1	4	7	6
Reach 4 (Sirajganj to Hurasagar)	20	0	12	3	2

Source: Fichtner/BWDB. 2014.

Table 9.6: Erosion along Jamuna Right Bank

Reaches	Erosion (1973-2014) (ha)	Length-averaged Erosion (ha/km)
Reach 1	2,652	115
Reach 2	7,579	180
Reach 3 (priority reach)	15,737	271
Reach 4	1,729	91

Source: Fichtner/BWDB. 2014.

Table 9.7: Predicted Erosion along Jamuna Right Bank over next Thirty Years

	Reach 1	Reach 2	Reach 3
Predicted erosion (ha)	2,300	5,700	6,000
Affected population	21,640	41,348	108,852

Source: Fichtner/BWDB. 2014.

As part of economic analysis of RBIP, the average yearly value of the above-described damages has been estimated. The variables considered include: i) loss of land by type of land use; ii) loss of houses; iii) loss of social and other structures; and iv) household relocation cost. It is estimated that likely projected damage would be about BDT 1.36 billion (about US\$ 17.33 million) per year. This would be the value of damages if the proposed interventions vis-à-vis bank erosion are not undertaken.

The revetment works envisaged under the proposed RBIP will help avoid the losses described above and will result in saving of about US \$ 17.33 million per year – the

annual losses that are likely to take place caused by the riverbank erosion if no protective measures are undertaken.

9.4.1.2. Improved Flood Protection

As already described in **Section 1.1**, prior to the BRE construction, overbank spills regularly caused flooding to a 240,000 ha area along the right bank of Jamuna. Originally, the BRE had a setback distance of about 1.5 km from the Jamuna's river bankline. Over the years the embankment has been increasingly under attack from bank erosion causing the embankment to breach at several locations (see **Table 9.8**). After such breaches of the embankment, it needs to be retired back away from its original alignment and reconstructed.

Table 9.8: Length and Number of Breaches in BRE

Year	Number of Locations	Length of Breaches (m)
1995	1	1,535
1996	2	4,830
1997	0	0
1998	1	876
1999	2	3,216
2000	0	0
2001	0	0
2002	0	0
2003	1	3,690
2004	1	990
2005	2	3,610
2006	2	2,350
2007	3	2,670
2008	1	487
2010	2	2,734
2011	0	0
2012	2	1,558
2013	2	5,250

Source: Fichtner/BWDB. 2014.

The retired embankments were typically constructed with around a 200 m setback distance to prevent flooding. In many places, the embankment has been retired several times. Presently, only 61 km of the original BRE remains intact, and many long reaches are close to the river bankline, making closing of breaches increasingly difficult.

Consequently, the integrity of the BRE is being threatened and large areas of rural and urban areas, such as Sirajganj, are being increasingly exposed to flooding. **Table 9.9** presents the data for the extent of flooding in the BRE-protected area; **Figure 9.2** shows the flood extent due to BRE breaches.

Table 9.9: Extent of Floods in BRE-Protected Area

District	Flooded Area (Sq. km)				
	1998	2000	2002	2004	2007
Bogra	281	59	183	410	284
Gaibandha	207	187	347	479	226
Kurigram	99	8	91	157	28
Lalmonirhat	-	-	4	4	-
Pabna	13	15	17	22	20
Rangpur		15	47	59	-
Sirajganj	264.	201	158	430.	446
Total	865	469	849	1,561	1,005

Source: Fichtner/BWDB. 2014.

As part of economic analysis of RBIP, the average yearly value of the above-described damages has been estimated. The variables considered include: i) loss of crops; ii) loss of houses; iii) loss of moveable and immovable assets; and iv) loss of rural physical infrastructure. It is estimated that likely projected damage would be about BDT 11.2 billion (about US\$ 164 million) per year. This would be the value of damages if the proposed interventions vis-à-vis embankment strengthening are not undertaken.

The embankment rehabilitation and reconstruction works envisaged under the proposed RBIP will help avoid the losses described above and will result in saving of about US \$ 164 million per year – the annual losses that are likely to take place caused by the flooding if no protective measures are undertaken.

The rehabilitation of existing and construction of new embankment will greatly improve the effectiveness of this structure against floods. Under the proposed project, the embankment has been re-designed: its width is being increased to ensure that breaches and seepage do not take place and its height is being increased catering to 100-year flood level and also climate change implications. In addition, the squatters will be removed from the embankment (after the payment of compensation) allowing effective monitoring and maintenance of the new embankment once constructed. This will greatly reduce the risks of embankment breaching or over-topping hence significantly increasing the protection of the area from floods and associated losses.

In addition to the above, the increased protection against riverbank erosion and flooding – combined benefits of the riverbank revetment and embankment reconstruction – will also bring in area development as well as investment that are not currently feasible because of the ever impending threats of bank erosion and flooding.

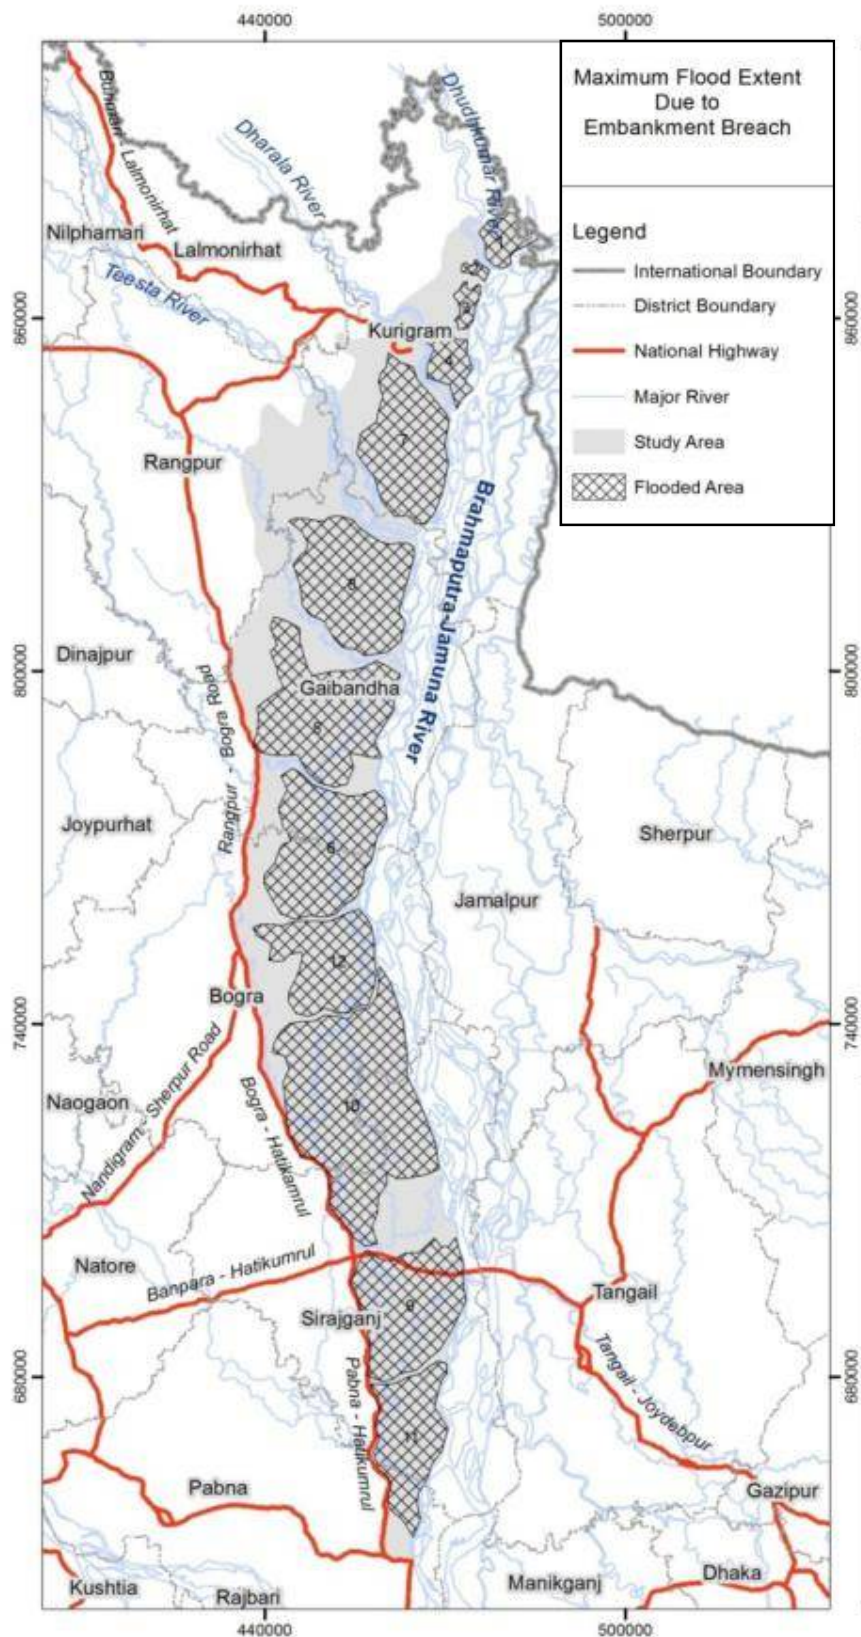


Figure 9.2: Flood Extent due to BRE Breaches (source: Fichtner/BWDB, 2014)

9.4.1.3. Land Cover and Landuse Changes

Potential impacts. As already discussed in **Section 5.5.4**, the project area is dominated by cultivation and associated activities covering 53 percent of the area, followed by settlements that cover about 29 percent of the area (see **Table 5.9** in **Chapter 5**).

As stated in **Section 7.13.6**, the cropping intensity is already quite high in the project area (211 percent against the national average of 190 percent). Therefore there is a limited opportunity for any increased cropping intensity once the RBIP is complete providing enhanced security against floods caused by the Jamuna river. However, cropping pattern could be changed with increasing trend of high value crops. **Table 9.10** presents an anticipated change in the cropping pattern, whereas **Table 9.11** shows the projected changes in yields and production of major crops.

Table 9.10: Present and Projected Cropping Patterns in RBIP Priority Area

Land Type	Kharif I (Mar – June)	Kharif II (Jul – Oct)	Rabi (Nov – Feb)	Without project			With project		
				Net area (ha)	Cropped area (ha)	% of Net area	Net area (ha)	Cropped area (ha)	% of Net area
High land (F0)	Vegetable	Fallow	Vegetable	1056	2112	2	1109	2217	2
	Fallow	Fallow	Maize	1802	1802	3	1892	1892	3
	Jute	Fallow	Maize	980	1960	1	1029	2058	1
	Jute	Fallow	Chili	3168	6335	5	3104	6208	4
	Jute	Fallow	Pulses	1872	3745	3	1835	3670	3
	Aus rice	Fallow	Chili	3168	6335	5	3104	6208	4
	Sugarcane		Chili	1126	2252	2	1104	2207	2
	Fallow	Fallow	Corn	1630	1630	2	1597	1597	2
Sub-Total				14801	26170	22	14774	26058	21
Medium High Land (F1)	Fallow	T. Aman	Boro	23445	46890	35	25789	51579	37
	Jute	T. Aman	Maize	1459	4378	2	1488	4465	2
	Fallow	T. Aman	Corn	377	755	1	370	739	1
	Jute	T. Aman	Boro rice	3111	9334	5	3049	9147	4
	Jute	T. Aman	Wheat	1830	5490	3	1794	5381	3
	Boro	T. Aman	Mustard	1056	3168	2	1109	3484	2
	Fallow	T. Aman	Wheat	1830	3660	3	1922	4392	3
	Maize	T. Aman	Potato	1459	4378	2	1532	4815	2
	Jute	T. Aman	Potato	1056	3168	2	1109	3484	2
	Vegetable	Vegetable	Boro	1056	3168	2	1109	3326	2
Sub-Total				36680	84387	55	39270	90814	57
Medium Low Land (F2)	Fallow	T. Aman	Pulses	1426	2852	2	1141	2282	2
	Jute	Fallow	Maize	980	1960	1	999	1999	1
	Jute	Fallow	Pulses	1647	3294	2	1614	3228	2
	T. Aus	T. Aman	Boro	3111	9334	5	3267	9800	5
Sub-Total				7164	17440	11	7021	17309	10
Low Land (F3)	Fallow	Fallow	Maize	1802	1802	3	1802	1802	3
	Fallow	Fallow	Peanut	70	70	0	77	77	0
Sub-Total				1872	1872		1879	1879	

Land Type	Kharif I (Mar – June)	Kharif II (Jul – Oct)	Rabi (Nov – Feb)	Without project			With project		
				Net area (ha)	Cropped area (ha)	% of Net area	Net area (ha)	Cropped area (ha)	% of Net area
Very Low Land (F4)	Fallow	Fallow	Boro	4513	4513	7	4513	4513	7
Total				65030	134382	98	67457	140573	98
Other Minor Cropping Patterns				1648	2472	2	1648	2595	2
Grand Total				66678	136854	100	69105	143169	100

Table 9.11: Existing and Projected Cultivation Area, Yield and Production of Major Crops in RBIP Priority Area

Crop	Without Project			With Project			Change in cropped area (%)	Change in total production (%)
	Area (ha)	Yield (t/ha)	Total Production (MT)	Area (ha)	Yield (t/ha)	Total Production (MT)		
Boro rice	36292	5.87	213034	37744	6.00	226462	4	6
Transplanted aman rice	40161	3.91	157030	45382	4.00	181528	13	16
Aus rice	6279	4.15	26058	5023	4.15	20846	-20	-20
Total Rice	82732	4.64	384152	88149	4.72	428836	7	12
Wheat	3660	3.11	11383	3733	3.12	11648	2	2
Maize	8482	8.74	74133	8906	8.77	78106	5	5
Jute	16103	2.82	45410	15298	2.82	43140	-5	-5
Mustard	1056	0.82	866	1162	1.00	1162	10	34
Pulses	4946	1.12	5540	5193	1.22	6336	5	14
Potato	2515	17.78	44717	2641	18.00	47534	5	6
Chili	7461	10.87	81101	7909	10.88	86046	6	6
Vegetables	4223	29.41	124198	4434	29.50	130807	5	5
Corn	2007	0.50	1004	2007	0.50	1004	0	0
Peanut	70		0	90			29	
Sugarcane	1126		0	1126			0	
Minor crops	2472		0	2521			2	
Total Other crops	54121		388351	55020		405782	2	4
Grand total	136853		772503	143169		834618	5	8

Based upon the changed cropping pattern and increased yield as shown in **Tables 9.10** and **9.11** above, there will be an increase in the agricultural income from the project area, as shown in **Table 9.12**. According to these projections, there will be a net increase of more than BDT 2 billion per year in the agriculture income from the project area.

Table 9.12: Crop wise gross returns in without and with project situation

Crop	Without project		With project		Difference	
	Production (MT)	Gross return (Million BDT)	Production (MT)	Gross return (Million BDT)	Production (MT)	Gross return (Million BDT)
Boro rice	213034	3834.61	226462	4529.24	13428	695
T. Aman rice	157030	3140.59	181528	3630.55	24498	490
Aus rice	26058	469.04	20846	416.93	-5212	-52
Wheat	11383	341.48	11648	372.72	265	31
Maize	74133	889.59	78106	1015.38	3974	126
Jute	45410	1680.19	43140	1725.60	-2271	45
Mustard	866	43.30	1162	63.89	296	21
pulses	5540	332.37	6336	411.83	796	79
Potato	44717	670.75	47534	760.54	2817	90
Chili	81101	1622.02	86046	1893.02	4945	271
Vegetables	124198	2483.97	130807	2877.76	6609	394
Corn	1004	30.11	1004	30.11	0	0
		15538.02		17727.57		2190

While the increased agricultural income will positively impact the livelihood of the local farmers, the increased cropping intensity and changed cropping pattern discussed above will potentially cause an increased use of agro-chemicals. The projected quantities of these fertilizer inputs, such as urea, TSP (Triple Super Phosphate) and MP (Muriate of Potash), are presented in **Table 9.13** below.

Table 9.13: Usage of Agro-Chemicals

Crop	Without Project				With Project			
	Fertilizer used (Kg/ha)			Pesticide used (Tk/ha)	Fertilizer use (Kg/ha)			Pesticide use (Tk/ha)
	Urea	TSP	MP		Urea	TSP	MP	
HYVBoro Rice	268	132	132	6400	295	145	145	7040
HYV T. Aman Rice	183	126	81	2108	219	151	97	2529
Jute	248	33	123	3069	248	33	123	3069
Maize	469	139	139	1796	515	153	153	1976
Wheat	268	136	66	3275	295	150	72	3602
Potato	254	67	124	4117	280	74	136	4528

Crop	Without Project				With Project			
	Fertilizer used (Kg/ha)			Pesticide used (Tk/ha)	Fertilizer use (Kg/ha)			Pesticide use (Tk/ha)
	Urea	TSP	MP		Urea	TSP	MP	
Mustard	62	40	32	1123	75	48	39	1347
Chilies	472	281	206	7560	519	309	226	8316

The increased use of agro-chemical can potentially cause an enhanced level of soil and water contamination and pose health hazards for the farm workers and also for the communities in the project area. Significance of these impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The integrated pest management programs (IPM) are already under implementation in Bangladesh. Linkage with these programs will be facilitated to address any increase usage of agro-chemicals in the area.

In addition to the above, an integrated pest management plan (IPMP) will be prepared by the RBIP during the project implementation but before its completion. The key objectives of the IPMP will include: i) to increase the productivity of agricultural crops through IPM and Integrated Plant and Soil Nutrient Management (IPSNM) practices, that includes the rational use of chemical pesticides and nutrients; ii) to raise awareness of all stakeholders about the IPM approach to crop management, and train extension agents and farmers to become practitioners of IPM; and iii) to determine the level of pesticide residue on agricultural crops in normally-treated and IPM-treated areas and disseminate information to stakeholders on the usefulness of undertaking IPM practices. The key elements of the IPMP will include: i) awareness/ dissemination of Information; ii) training of facilitators (ToF) and establishing of Farmer Field Schools (FFS); iii) implementing Integrated Plant and Soil Nutrient Management (IPSNM) techniques (including organic fertilizers, composting and worm culture); iv) determining pesticide residue on crops; and v) strengthening institutional capacity on IPSNM.

Furthermore, the Information, Education, and Communication (IEC) component of the Social Development Plan (SDP) of RBIP will include capacity building of farmers and awareness raising of communities. For this purpose, linkage will be developed with the Agriculture Extension Department and local farmers will be provided IPM trainings; in addition, potential candidates will be identified among the local farmers to be trained as IPM trainers. This will ensure sustainability of capacity building initiative even after the completion of five-year SDP under RBIP.

Residual impacts. With the implementation the above measures, the impacts associated with intensification of cultivation will be adequately addressed and the significance of the residual impacts is likely to be **Low**.

9.4.1.4. Loss of natural vegetation and trees

Potential impacts. Project site harbors different sorts of floral species though along the proposed embankment the number of species richness and individual quantity is not so much high relative to the other part of country. The floral composition of the project site comprises tree, shrubs and herbs. The survey during the baseline data collection has indicated that there are 114 mature trees per ha and 21 mature shrubs in per ha while the

number of bamboo species in project site is 34 per ha. Most of the tree species comprises timber (e.g. eucalyptus and acacia) and horticultural species (e.g. mango, jackfruit). Ecologically, these species are not very important; moreover they have negative impact on human health also. Except for the economic value of eucalyptus and acacia, these species have no significant benefit for the ecosystem. On the other hand, the horticultural species like mango and jackfruit support the poor people of this area by providing various products such as fuel wood, food and timber. Some horticultural species such as jackfruit is used as fodder as well. These species are used by birds for their habitat and food. Due to the proposed interventions, the project area will lose about 170,000 trees (**Table 9.14**).

Table 9.14: Details of Trees to be Affected

Name of Upazila	Timber				Fruit				Medicinal Plant				Total
	Large	Medium	Small	Sapling	Large	Medium	Small	Sapling	Large	Medium	Small	Sapling	
Sirajganj Sadar	537	2,776	3,438	2,232	313	1,716	2,054	1,685	9	23	26	7	14,816
Kazipur	1,811	7,556	10,478	7,207	1,532	5,632	5,326	10,766	17	130	153	82	50,690
Dhunot	2,132	4,473	11,093	10,894	1,648	2,167	2,519	2,265	44	15	45	5	37,300
Sariakandi	3,427	10,391	18,923	7,628	2,656	7,817	8,113	8,660	61	82	318	78	68,154
Total	7,907	25,196	43,932	27,961	6,149	17,332	18,012	23,376	131	250	542	172	170,960

The revetment proposed under the RBIP can potentially affect the aquatic vegetation along the riverbank. Some parts of the riverbank are covered with dense reeds (see **Figure 6.23**) that provide nursing ground of birds and small fishes. However, the revetment is being proposed for the riverbank stretches that undergo severe erosion during every high-flow season resulting in loss of any vegetation that exists there (see **Figure 9.3** below for a photograph of such a riverbank stretch near Chandanbaissa).



Figure 9.3: Riverbank Erosion near Chandanbaissa

Hence the revetment works are unlikely to cause any significant loss of the aquatic vegetation; in fact these protection works will discontinue the loss of vegetation caused by the riverbank erosion. Furthermore, the aquatic vegetation naturally grows along slow moving streams at different places of Jamuna river hence it is expected that it will gradually re-grow along the protected riverbank as well.

The significance of the above impacts is likely to be **Moderate**, based upon the criteria described in **Section 9.2**.

Mitigation and Management. For the trees to be removed for the proposed interventions, compensatory tree plantation will be carried out along the embankment. About 140 ha of land is available for this purpose. A plantation plan has been prepared (see **Annex D**); salient features of this plan are summarized below.

A limited number of tree species have been proposed for the compensatory plantation in view of the ease of management. About 2500 trees (1875 timber and 625 fruit species) will be planted per hectare; hence a total of about 350,000 trees will be planted along the priority reach. **Table 9.15** presents a list of the recommended tree species with their harvesting period and key features.

Table 9.15: Trees to be Planted on the Embankment

	Local name	Biological name	Key Features	Remarks
1.	Akashmoni	<i>Acacia auricoliformis</i>	Fast growing medium quality timber but looks like teak.	Maximum 20%, to be felled in 8 th year
2.	Barapatar mehagony	<i>Swietenia macrophylla</i>	Slightly faster growing, very often affected by stem borer, produces good timber	To be felled in 12 th year
3.	Chikrassia	<i>Chickrassia tabularis</i>	Faster growing, good timber species	To be felled in 10 th year
4.	Gamar	<i>Gmelina arborea</i>	Wood is "A grade" timber, fast growing, high priced.	To be felled in 8 th year
5.	Neem	<i>Melia indica</i> / <i>Azadirachta indica</i>	Possess good medicinal values, durable wood, used in musical instrument making (especially <i>tobla</i>)	To be felled in 10 th year
6.	Toon	<i>Cedrela toona</i>	Good timber, light weight, used in making rickshaw body, boat, etc.	To be felled in 12 th year

	Local name	Biological name	Key Features	Remarks
7.	Khajoor	<i>Phoenix sylvestris</i>	Fibrous rooted medium growing plant, can withstand strong wind thrusts, juice used to make “gur” and fetches high price, long living tree.	Never to be felled (may be replaced by another fruit or fresh water wetland species, including <i>Syzygium cumini</i> , <i>Phyllanthus embellica</i>).
8.	Narikal	<i>Cocos nucifera</i>	Fibrous rooted medium growing plant, can withstand strong wind thrusts, fruits green or ripe fetches high price.	
9.	Tal	<i>Borassus flabellifer</i>	Fibrous rooted slow growing long living plant, can with stand strong wind thrusts, juice and fruits fetches high price.	
10.	Hijol	<i>Barringtonia acutangula</i>	A fresh water wetland species, branches produce "Khata" for open water fishing.	
11.	Payaara	<i>Psidium guajava</i>	Timber is not good but the fruits fetches high price.	To be planted on the (1+6+2.95=) 9.95 meter wide strip, between the road and the river, at 4 x 4 meter spacing.

In addition to providing ecological service, embankment stabilization, and enhanced aesthetic value, this plantation will also prevent any encroachment over the embankment.

A monitoring program will be initiated for the re-growth of the aquatic vegetation along the riverbank revetment. The ToR of this monitoring is presented in **Annex E**.

Residual impacts. With the help of the above-mentioned mitigation measures, the potential impacts associated with clearing of riparian as well as terrestrial vegetation/trees will be adequately addressed and hence the significance of the residual impacts is likely to be **Low**.

9.4.1.5. Loss of riverbank/aquatic habitat

Potential impacts. Total length of the revetment will be about 17 km divided into four major sites at Balighuri, Ratankandi, Baniajan and Chandanbaissa. Average width of the

revetment will be 100 meter of which the under-water portion will be 60 meter. Hence the estimated total potentially impacted aquatic area will be about 102 ha. However, this part of the aquatic habitat is regularly eroded because of the frequent riverbank erosion. Hence the revetment will not result in any additional loss of aquatic habitat.

The river bottom material like clay, silt, sand, cobbles, and boulders has different physical and chemical gesture and may support aquatic life differently. Geo-bags are helpful to stun sediment which will help to improve water transparency. On the other hand, geo-bag will cover part of the riverbed that may potentially have negative impacts on benthos. The benthic fauna at the substrates and phytoplankton at the water column will potentially be affected negatively at the revetment sites, which will in turn have effect on the food chain and may result in food shortage for faunal species such as fish, crab, and turtle. The covering of river bed with geo-bags in limnetic zone may potentially affect some fishes, such as Ayre (*Aorichthys aor*), boal (*Wallago attu*), Pangas (*Pangasius pangasius*), different types of baim, gutum (*Lepidocephalus guntea*), bala (*Glossogobius giuris*) and some small fish species by limiting their feeding opportunity. The associated fish production loss has been estimated as about 9 tonnes annually during the construction phase (considering that the annual fish production rate of the Jamuna river is 90kg/ha/year); however this loss will be more than compensated through increased fish production in the flood plains (discussed later in the Chapter).

Furthermore, it is now established that the geo-bags revetment creates fish habitat, as phytoplankton grow on their surface. Previous studies^{30 31} on impacts of geo-bags on the aquatic species have shown positive results. In general, there were more number of species and more population of fish and non fish aquatic organisms in areas protected with geo-bags. The overall accumulation of species in number was better in geo-bag protected area than in the areas protected by cement concrete blocks. The quantity of fish availability was also better with geo-bags in many locations. In addition, the CC blocks used in the upper portion of the revetment are likely to provide habitat for certain fish species such as eels. The revetment is not likely to affect the dolphin or wintering bird habitats since the river protection works will not be carried out at or in the vicinity of those areas.

The aquatic habitat can also be potentially affected if sediments and pollutants from the construction sites and camp sites are released in the water bodies.

Based upon the above discussion, the potential impacts of the project on aquatic habitat have been characterized as **Moderate**, using the criteria described in **Section 9.2**.

Mitigation and Management. Since most of the potentially negative impacts of riverbank revetment on the aquatic habitat are expected to be temporary in nature, and since the revetment is likely to provide habitat for some aquatic species, as stated earlier, no mitigation measures are needed for this activity. Habitat monitoring will however be initiated during the construction phase and will be continued thereafter to fully understand the impact of revetment on the aquatic habitat (see **Annex E** for the ToR of this monitoring). Appropriate mitigation measures may need to be designed and implemented

³⁰ Geotextile Bags for River Erosion Control in Bangladesh, Under water behavior and environmental aspects. Hannes Zellweger; 2007.

³¹ Bank Protection and Fisheries at JMREMP; Jamuna-Meghna River Erosion Mitigation Project, Special Report; 2007.

on the basis of monitoring results. Similarly, long-term monitoring of river morphology will also be initiated to fully understand the changes in river morphology.

The monitoring program will be based on the assumption that different riverine fish species prefer different bankline conditions. The program will include year-round data collection on fish and non-fish organisms in control sites (i.e., areas without geo-bag revetment) as well as revetment sites. For each location, depth series data will be collected on fish habitat, availability of food, and abundance of key species. The monitoring will primarily focus on adult or sub adult fish that will be available along bankline, however additional information will also be collected on breeding, nursing, and migration of the key species. The monitoring program will also cover potential impacts on other key aquatic species such as dolphins and turtles.

To protect the aquatic habitat from the sediments and pollutants from the construction sites and cam sites, contractors will be required to prepare and implement pollution prevention plan and waste management plan. Through these plans, it will be ensured that no untreated effluents or solid waste is released in the water bodies.

Residual impacts. With the help of the above-mentioned mitigation measures, the potential impacts associated with aquatic habitat will be adequately addressed and hence the significance of the residual impacts is likely to be **Low**.

9.4.1.6. Loss of floodplain habitat

Potential impacts. The embankment works will affect about 340 ha of terrestrial habitat however most parts of this area is completely modified and is currently either under cultivation or included in built-up area (homesteads, other physical infrastructure). Hence the project interventions are unlikely to cause any significant negative impacts on the natural habitat under its immediate footprint (loss of natural vegetation is already covered under **Section 9.4.1.4**). This potential impact is assessed as **Low**, based upon the criteria described in **Section 9.2** and hence no mitigation is required for this.

In addition to the above impacts, the embankment construction can potentially disrupt the hydrological and ecological connectivity between the Jamuna River and smaller inland rivers, *khals* and *beels* – negatively affecting the floodplain habitat and potentially reducing the fish production in the area. This potential impact is characterized as **High**, based upon the criteria described in **Section 9.2**.

Since its construction in 1960s, the BRE has been acting as a barrier, disconnecting large area of floodplain from the river. This has brought changes in the natural ecosystems of floodplain dependent on the flood waters resulting in great loss of biodiversity and natural resources, as well as livelihood opportunities for the communities. The frequent embankment breaches while causing great economic loss to people in terms of lost lands and crops, restored to some extent the ecological connectivity of the floodplain with the main river. However, the proposed embankment reconstruction under RBIP may potentially disrupt the ecological connectivity again. The potential negative impacts of the embankment will be mostly on the fish along with other aquatic species. Fish migration especially during pre-monsoon and monsoon season is likely to be greatly obstructed due to the connectivity loss.

Most significant impact is likely to be on the fish migration from the Jamuna river to the floodplain through linking rivers/*khals*. Internal rivers, *khals* and shallow floodplains provide breeding and feeding areas for a number of riverine fishes. These fishes migrate towards the shallow area of floodplain/*beels* that allow them to feed and shelter at the

early stages of life cycle. Icamati, Bangali and Manosh rivers are the three main migration routes of the study area. Besides, a number of *khals* listed in **Annex F** also facilitate fish migration to and from the internal floodplain and beels. The RBIP has a potential to obstruct this fish migration through these khals unless fish pass structures are included in the project scope.

Fish biodiversity is already declining in the project area because of the reduced ecological connectivity resulting into decline in the fish production whereas fish demand is increasing with the population growth. The project has a potential to exacerbate deterioration of fish habitat and also accelerate conversion of wetlands into cropland primarily because of the gradual drying up of internal *khals* and *beels*.

It is estimated that total annual fish production will decline by about two tonnes in *khals* (water channels) and internal rivers, about 261 tonnes in *beels* (water ponds), and about 311 tonnes in floodplains. The associated annual economic loss has been estimated to be BDT 616,275 from *khals* and internal rivers, BDT 78,306,750 from *beels* and BDT 93,355,500 from floodplain – a total of about BDT 255 million on a yearly basis (see **Table 9.16** for details).

Mitigation and Enhancement. To restore the ecological and hydrological connectivity, appropriate number of regulators and fish passes will be constructed at appropriate locations as part of the RBIP. During the present study four potential areas within the priority reach have been identified where re-establishing of ecological connectivity will greatly help in restoring the biodiversity of the area particularly facilitating the fish migration, which in turn will enhance the fish production in the beels, khals, and other water bodies of the floodplain.

Operation and maintenance committees will be established for each regulator to appropriately operate and maintain these structures. These committees will be responsible for scheduled opening and closing of regulator gates, and removal of silt deposits in the khals. These committees will be provided with adequate training in O&M of the regulators. Furthermore, to achieve maximum benefit and also to ensure functionality of the fish passes, it is also necessary to undertake enhancement measures in the connecting *khals*, *beels* and other water bodies. The list of water bodies that need improvement works to ensure functionality of fish passes and enhance connectivity with the Jamuna river is furnished in **Annex F**.

Construction of fish passes will facilitate fish migration that will ultimately enhance fish production of the area. It is estimated that the restoration of ecological connectivity achieved through fish pass structures and regulators will enhance the fish production from the floodplain of the priority reach by about 1,880 tonnes per year, resulting in a net economic benefit of about BDT 564 million annually (see **Table 9.17** for details). Since the productivity enhancement is a gradual process, it is estimated that the above enhancements will be achieved after five years of project completion.

The regulators and fish pass structures proposed as part of RBIP are listed in **Table 9.18** and shown in **Figure 9.4**.

Residual impacts. With the help of the above-described mitigation measures, the potential impacts on the floodplain habitat are likely to be adequately addressed and hence the residual impacts will be **Low** in significance. On the other hand, the project will result in net economic benefit of BDT 564 million on an annual basis, as described above.

Table 9.16: Impact of the RBIP on the fish habitat area and annual fish production in different scenarios (for Priority Reach)

Fish Habitat Type	Impact Assessment at different project scenario											
	Future without Project (FWOP)				Future with Project (FWIP) - Without EMP				FWIP -With EMP			
	Area (ha)	Production Rate (Kg/ha/yr)	Production (tonnes)	Price (m BDT)	Area (ha)	Production Rate (Kg/ha/yr)	Production (tonnes)	Price (m BDT)	Area (ha)	Production Rate (Kg/ha/yr)	Production (tonnes)	Price (m BDT)
River	12652.91	90.00	1138.76	341.6	12652.91	70	885.70	265.7	12652.91	170	2,150.99	645.2
Khal	91.30	60.00	5.48	1.6	68.48	50	3.42	1.0	114.13	120	13.70	4.1
Beel	1289.00	615.00	792.74	237.8	966.75	550	531.71	159.5	1289.00	750	966.75	290.0
Flood plain	3917.50	187.50	781.29	234.3	2938.13	160	470.10	141.0	3917.50	290	1,136.08	340.8
Embayment (Kole)	719.40	642.50	463.84	139.1	719.40	550	395.67	118.7	719.40	950	683.43	205.0
Pond	20.90	1575.00	32.98	9.8	31.35	2500	78.38	23.5	36.58	4000	146.30	43.8
Total	18,691.01		3,215.08	964.5	17,377.01		2,364.98	709.4	18,729.51	6,280.00	5,097.24	1,529.1

Note: Impact has been estimated for five years after project completion. Without EMP: no mitigations implemented; with EMP: mitigations implemented.

Table 9.17: Net Effect of the RBIP on the fish habitat area and annual fish production in different scenarios (for Priority Reach)

Fish Habitat Type	Impact Assessment Summary Result (+/-)							
	Area (ha)		Production (tonnes)		Benefit/Loss			
	Without EMP	With EMP	Without EMP	With EMP	Without EMP (m BDT)	% Change	With EMP (m BDT)	% Change
River	0.00	0.00	-253.06	1012.23	(75.9)	-22.2%	303.6	88.9%
Khal	-22.83	22.83	-2.05	8.22	(0.6)	-37.5%	2.4	150.0%
Beel	-322.25	0.00	-261.02	174.02	(78.3)	-32.9%	52.2	22.0%
Flood plain	-979.38	0.00	-311.19	354.79	(93.3)	-39.8%	106.4	45.4%
Kole	0.00	0.00	-68.17	219.59	(20.4)	-14.7%	65.8	47.3%
Pond	10.45	15.68	45.40	113.32	13.6	137.6%	33.9	343.6%
Total	(1,314.00)	38.50	(850.10)	1,882.16	(255.0)	-26.4%	564.6	58.5%

Note: Impact has been estimated for five years after project completion. Without EMP: no mitigations implemented; with EMP: mitigations implemented.

Table 9.18: Proposed Regulators and Fish Friendly Structures in the Priority Reach

Regulator	Irrigation (Yes/No)	Fish pass Jamuna- Floodplain (June- September) (Yes/No)	Fish pass Floodplain- Jamuna (June- September) (Yes/No)	Fish channel Jamuna- River (March- May) (Yes/No)	Name of connecting River/Beel
Balighuri	Yes	Yes (from 15 May), need channel improvement	No	Only after 15 May	River: Icamati; Beels: Aminpur; Joynagar; and Charkhada
Pukuria Bhandarbari	Yes	Re-excavation needed in offtake to connect with the regulator	No	No	N/A
Kamalpur	Yes	Yes	No	No	River: Icamati, Bangali and Manosh
Kutubpur	Yes	Yes	No	No	River: Bangali and Manosh
Antarpara	Yes	Regulator is enough but required to maintain head difference of around 1 m	No	No	River: Bangali; Beel: Deuli
Sariakandi Fish pass (existing)	No	Yes (need de-siltation) and connectivity at the river side	Yes	No	River: Bangali

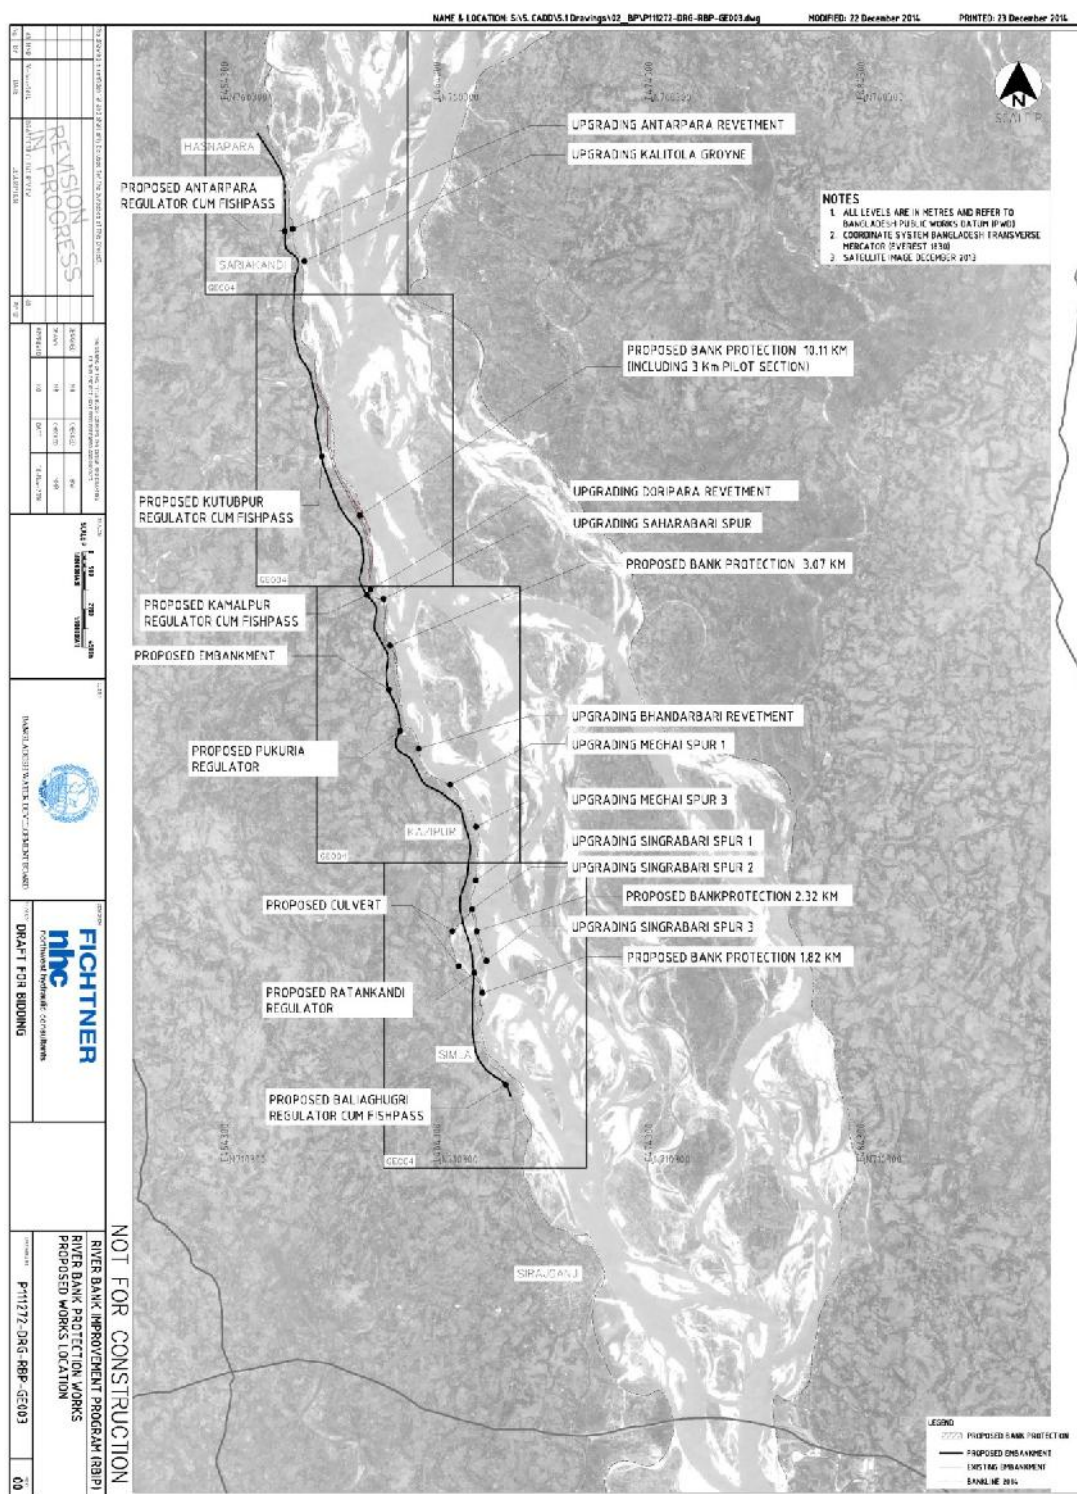


Figure 9.4: Location of Regulators and Fish Pass Structures

9.4.1.7. Drainage Congestion and Water Logging

Potential impacts. As stated in above section, construction and or rehabilitation of the embankment may potentially block some water channels (*khals*), which provide

ecological connectivity in addition to facilitating irrigation/drainage. Some regulators were constructed across the original embankment constructed as part of the BRE however many of them have either been blocked or not functioning properly. As a result some cultivated lands particularly near Baliaghuri in Sirajganj are facing drainage congestion and water logging problems. Significance of these impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Mitigation and Management. Water regulators have been included in the project design, as stated earlier (see **Table 9.18** and **Figure 9.4**). Appropriate operating procedures will be implemented to operate these structures to address the drainage congestion and water logging problems in the area.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with water logging and drainage congestion are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.2. Significant Social Impacts from Project Siting

9.4.2.1. Land acquisition and Resettlement

Potential impacts. Rehabilitation of existing and construction of new embankment will cause changes in land form and land use. For the priority reach, the total land requirement is about 370 ha. According to the full census of the priority reach carried out by the social safeguard team, a total of 5,751 households will be affected by the construction / rehabilitation of the embankment, in which 3,639 households need to be relocated. A summary of land acquisition requirement, affected households (AHs) and relocation requirements are tabulated in **Tables 9.19** and **9.20**; details are available in the Resettlement Action Plan (RAP) of the RBIP, prepared by the social safeguard team.

Table 9.19: Land Acquisition Requirement for RBIP Priority Reach

Category of Land	Classification	Land in Sirajganj (acres)		Land in Bogra (acres)		Total Land (acres)	
		Sirajganj sadar	Kazipur	Dhunot	Sariakandi	Total	%
Residential land	Dwelling land/Vita/high land	22.6	72.21	57.27	110.11	262.19	68.25
Commercial land	Commercial Land	0.05	1.19	0.73	1.84	3.81	0.99
Arable land	Cultivable land	8.94	7.2	4.45	20.59	41.18	10.72
other non-agricultural land	Orchard	3.4	12.96	5.71	20.09	76.99	20.04
	Bamboo groves	1.52	2.4	3.11	10.9		
	Pond	0.43	1.23	1.13	11.19		
	Wet land/ditch	0	0.43	1.25	0.87		
	Fallow land	0	0.03	0	0.35		
Total in Acre		36.94	97.65	73.65	175.93	384.16	100

Table 9.20: Summary of Resettlement Impacts

Impacts/Types of losses		Sirajganj		Bogra		Total
		Sirajganj Sadar	Kazipur	Dhunat	Sariakandi	
A.	Alignment Length and Required Land Acquisition					
1.	Total length of alignment/km	5.595	13.276	7.895	22.759	49.525
2.	Required Land acquisition in hector including resettlement site (50 ha)	40.23	94.67	57.04	178.03	370
B.	Number of physically displaced HHs requiring relocation³²					3639
1.	Affected Residential HHs only	164	812	424	856	2256
2.	Affected Business HHs only	04	60	29	55	148
3.	Affected Residential & Business HHs only	04	39	03	38	84
4.	Affected Residential & Agricultural land only	00	02	02	15	19
5.	Affected Residential Structure and Land other than Agricultural	93	212	259	557	1121
6.	Affected Fish Pond only	01	00	01	09	11
B.1.	Number of person requiring relocation	1539	5737	3262	7736	15,558
B.2	Average HH Size	4.75	4.46	4.35	4.05	4.28
C.	Number of Affected HHs other than requiring relocation					
1.	Affected CPRs	7	9	18	44	78
2.	Affected shallow tube-well	0	01	03	02	06
3.	Only trees affected HHs	62	156	95	278	591
D.	Affected HHs losing agricultural plots only					
D.1.	Number of HH's losing agricultural plots ³³	171	369	648	249	1437
D.2.	Affected population due to loss of agricultural land	953	2,189	3,386	1,498	8,026

³² Refers to affected HHs and Businesses to be relocated³³ No relocation required

Impacts/Types of losses		Sirajganj		Bogra		Total
		Sirajganj Sadar	Kazipur	Dhunat	Sariakandi	
D.3.	Average HHs size	5.57	5.93	5.22	6.08	5.70
E.	Relative information based on social context (already embedded in A,B,C& D)					
1.	Number of total affected HHs (B+D.1)	437	1,494	1,366	1,779	5,751
2.	Number of affected population(B.1+C+D.2)	2,492	7,926	6,648	9,234	23,584
3.	Total no. of trees on private land	14341	37719	31376	53504	136940
4.	No of trees affected on government land	475	12971	5924	14650	34020
5.	Number of wage labourer affected	27	57	75	77	128
E.1.	Total number of Vulnerable HHs					2962
1.	Female Headed HH	34	170	80	182	466
2.	Poor HH	90	316	247	650	1303
3.	Land Less HH	57	337	148	231	773
4.	Elderly headed HH	17	45	51	74	187
5.	Disabled HH	2	12	3	16	33
6.	HH Losing >10% of their income due to loss of productive lands	12	58	19	111	200

In addition to the above, there will be some temporary land take during construction phase for establishing contractors' facilities such as camps and offices.

Significance of the above-described impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. To address the land take and resettlement impacts, detailed resettlement planning is underway following the national as well as World Bank policies and guidelines. A Resettlement Action Plan (RAP) has been prepared for the Priority Reach; similar plans will be prepared for the later phases of the Program. The RAP includes entitlement matrix for each kind of resettlement impact, compensation payment procedure, monitoring requirements, and a comprehensive grievance redress mechanism (GRM). The resettlement budget on the basis of the impacts described above is given in **Table 9.21**; details are available in the RAP.

Table 9.21: Resettlement Budget for RBIP Priority Reach

Item No.	Category of losses	Sirajganj Sadar	Kazipur	Dhunot	Sariakandi	Total budget in BDT
A	Compensation for land	121,440,712	338,708,472	190,070,817	1,011,474,814	1,661,694,815
B	Other Resettlement Benefits for land	19,034,471	59,940,497	34,642,432	133,130,831	246,748,232
C	RV of standing crops & fish stock	6,384,530	16,171,853	8,262,641	32,597,776	63,416,800
D	Compensation for structure	99,485,840	307,667,180	207,533,350	452,935,100	1,067,621,470
E	Other Resettlement Benefits	17,266,900	50,109,660	34,904,270	68,502,350	170,783,180
F	Compensation for Tube-well & Toilet	1,841,000	7,443,000	5,726,400	11,811,500	26,821,900
G	Compensation for Trees	36,591,584	79,199,416	78,649,524	151,941,092	346,381,616
H	Compensation for Trees on Gov. Land	1,003,310	22,761,500	6,568,630	24,374,310	54,707,750
I	Other Resettlement Benefits for tree	1,832,790	7,437,255	3,933,930	10,952,730	24,156,705
J	Resettlement Benefits for business	240,000	2,985,000	960,000	2,790,000	6,975,000
K	Resettlement Benefits for wage labours	108,000	234,000	333,000	396,000	1,071,000
L	Resettlement Benefits for tenants & structure owners	1,331,000	6,045,000	3,395,000	7,608,000	18,379,000
	Total compensation and benefits	306,560,137	898,702,834	574,979,994	1,908,514,503	3,688,757,467
M	Administrative Cost	0	0	0	0	1,043,302,865
	Total (BDT)	306,560,137	898,702,834	574,979,994	1,908,514,503	4,732,060,332
	Contingency 5% of the total	15,328,007	44,935,142	28,749,000	95,425,725	236,603,017
	Grand Total	321,888,143	943,637,975	603,728,994	2,003,940,228	4,968,663,349

Residual impacts. With the implementation RAP, the displacement-related impacts will be greatly addressed and the significance of the residual impacts is likely to be **Low to Moderate**.

9.4.2.2. Loss of Agriculture and Other Sources of Income

Potential impacts. The project interventions particularly the embankment works can potentially affect agricultural and other income generating activities under the project footprint and its immediate vicinity. The embankment works in the priority reach are likely to affect 41.18 acres (16.7 ha) of agricultural land and a total of 232 business structures. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The RAP will address all losses to agriculture and other income-generating activities caused by the project. **Table 9.21** includes the compensation amount that will be paid for the loss of agricultural land and other livelihood opportunities.

Residual impacts. With the implementation RAP, impacts associated with loss of agriculture and other incomes will be greatly addressed and the significance of the residual impacts is likely to be **Low to Moderate**.

9.4.2.3. Impacts on Community Facilities and Places of Religious Significance

The project interventions particularly the embankment can potentially affect community facilities, common property resources, and religious places such as mosques, temples, and graveyards. The embankment in the priority reach is likely to affect a total of 74 such places as listed in **Table 9.22**. Most of these facilities are likely to be displaced because of the land acquisition for the project. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Table 9.22: List of Common Property Resources (CPR) by Location

	Description	Upazila	Union	Village	Land Ownership
	Sirajganj District				
1.	Madrasa (religious school)	Sirajganj Sadar	Chhangachha	Balighugri	Private
2.	Temple	Sirajganj Sadar	Chhangachha	Balighugri	Private
3.	Temple	Sirajganj Sadar	Chhangachha	Balighugri	Private
4.	Temple	Sirajganj Sadar	Chhangachha	Balighugri	Private
5.	Mosque	Sirajganj Sadar	Chhangachha	Balighugri	Private
6.	Mosque	Sirajganj Sadar	Chhangachha	Italy	Private
7.	Mosque	Sirajganj Sadar	Ratankandi	Bahuka	Private
8.	Mosque	Sirajganj Sadar	Ratankandi	Bahuka	BWDB
9.	Mosque	Sirajganj Sadar	Ratankandi	Bahuka	BWDB
10.	Temple	Kazipur	Kazipur	Beara	Private
11.	Graveyard	Kazipur	Kazipur	Beara	Private
12.	Mosque	Kazipur	Kazipur	Beara	Private
13.	Club	Kazipur	Kazipur	Beara	BWDB
14.	School	Kazipur	Maijbari	Kunkunia	Private
15.	Mosque	Kazipur	Maijbari	Kunkunia	Private
16.	School	Kazipur	Subhagachha	Subhagachha	BWDB
17.	Mosque	Kazipur	Subhagachha	Subhagachha	Private
18.	Madrasa	Sirajganj Sadar	Chhangachha	PanchThakuri	Private
19.	Madrasa	Sirajganj Sadar	Chhangachha	PanchThakuri	Private
20.	Mosque	Sirajganj Sadar	Chhangachha	PanchThakuri	BWDB
	Bogra District				
21.	Mosque	Dhunot	Bhandarbari	Bhutbari	Private

	Description	Upazila	Union	Village	Land Ownership
22.	Mosque	Dhunot	Bhandarbari	Raghunathpur	Private
23.	Graveyard	Dhunot	Bhandarbari	Raghunathpur	Private
24.	Mosque	Dhunot	Bhandarbari	Kaiagari	Private
25.	College	Dhunot	Bhandarbari	Baniajan	Private
26.	Govt. Office	Dhunot	Bhandarbari	Baniajan	BWDB
27.	Mosque	Dhunot	Bhandarbari	Shimulbari	Private
28.	Madrassa	Dhunot	Bhandarbari	Shimulbari	BWDB
29.	NGO (Grameen Bank)	Dhunot	Bhandarbari	Shimulbari	BWDB
30.	School	Dhunot	Gosainbari	Chunia Para	BWDB
31.	Mosque	Sariakandi	Kamalpur	Dori Para	Private
32.	Mosque	Sariakandi	Kamalpur	Godakhali	Private
33.	School	Sariakandi	Kamalpur	Isamara	BWDB
34.	Eidgah	Sariakandi	Kamalpur	Isamara	Private
35.	Mosque	Sariakandi	Kamalpur	Rauhadaha	Private
36.	Mosque	Sariakandi	ChandanBaisha	Ghughumari	Private
37.	Pagoda	Sariakandi	ChandanBaisha	Ghughumari	Private
38.	Mosque	Sariakandi	ChandanBaisha	Ghughumari	Private
39.	School	Sariakandi	ChandanBaisha	Ghughumari	Private
40.	Health Center	Sariakandi	ChandanBaisha	Ghughumari	Private
41.	School	Sariakandi	Kutubpur	Kutubpur	BWDB
42.	School	Sariakandi	Kutubpur	Kutubpur	BWDB
43.	Eidgah	Sariakandi	Kutubpur	Baraikandi	Private
44.	School	Sariakandi	Kutubpur	Baraikandi	Private
45.	Health Center	Sariakandi	Kutubpur	Baraikandi	Private
46.	Mosque	Sariakandi	Kutubpur	Baraikandi	BWDB
47.	School	Sariakandi	Kutubpur	Baraikandi	BWDB
48.	School	Sariakandi	Kutubpur	Baraikandi	Private
49.	School	Sariakandi	Kutubpur	Baraikandi	Private
50.	Mosque	Sariakandi	Kutubpur	Debdanga	Private
51.	Madrassa	Sariakandi	Kutubpur	Debdanga	Private
52.	Mosque	Sariakandi	Kutubpur	Debdanga	Private
53.	Mosque	Sariakandi	Kutubpur	Debdanga	BWDB
54.	Mosque	Sariakandi	Sariakandi	Dighalkandi	Private

	Description	Upazila	Union	Village	Land Ownership
55.	Health Center	Sariakandi	Sariakandi	Dighalkandi	Private
56.	School	Sariakandi	Sariakandi	Dighalkandi	Private
57.	School	Sariakandi	Sariakandi	Bagber	Private
58.	Temple	Sariakandi	Sariakandi	Bagber	Private
59.	Church	Sariakandi	Sariakandi	Bagber	Private
60.	Mosque	Sariakandi	Sariakandi	Batia	BWDB
61.	Club	Sariakandi	Sariakandi	Batia	BWDB
62.	School	Sariakandi	Sariakandi	Batia	Private
63.	Madrasa	Sariakandi	Sariakandi	Batia	Private
64.	Mosque	Sariakandi	Sariakandi	Batia	Private
65.	Mosque	Sariakandi	Sariakandi	Batia	Private
66.	Govt. Office	Sariakandi	Sariakandi	Dhap	BWDB
67.	Govt. Office	Sariakandi	Sariakandi	Dhap	BWDB
68.	College	Sariakandi	Sariakandi	Dhap	Private
69.	Mosque	Sariakandi	Sariakandi	Par Titparal	BWDB
70.	School	Sariakandi	Sariakandi	Par Titparal	Private
71.	Madrasa	Sariakandi	Hat Sherpur	KhordBalali	Private
72.	School	Sariakandi	Hat Sherpur	KhordBalali	Private
73.	School	Sariakandi	Hat Sherpur	KhordBalali	Private
74.	Mosque	Sariakandi	Hat sherpur	Khordbalali	Private

Mitigation and Management. The relocation of the above listed community facilities and places will be covered under the RAP that is being prepared for the RBIP priority reach as mentioned in **Section 9.4.2.1** earlier; **Table 9.21** includes the cost of relocation of these structures or facilities. The RAP describes the procedure to be adopted to relocate these facilities and will also include cost estimates for the relocation. The entire process of relocation will be carried out in complete coordination and participation of the relevant community and in a culturally- and socially-acceptable manner.

Residual impacts. With the implementation RAP, the displacement-related impacts will be greatly addressed and the significance of the residual impacts is likely to be **Low to Moderate**.

9.4.2.4. Barrier/Severance Effect

Potential impacts. Riverbank revetment may potentially block access of the people to the river since slope of the concrete blocks can potentially make it difficult for the people and livestock to cross it. Similarly linear nature of embankment may block communities' access to and from the river. The embankment slope will also pose a hurdle for the people and livestock to cross it. Finally, when the road is constructed and becomes

operational, it may potentially act like a barrier between the settlements and river. However, the road once operational will greatly facilitate local and long-distance transportation. **Table 9.23** lists the key locations where revetment and embankment (and road) may cause hindrance to the people and their livestock.

Table 9.23: List of Key Bazaars and Boat Jetties

Chainage	Description	Name of the Key Places	Village	Union
Sirajganj sadar (20.00 - 27.20 km)	Bazaar	Baoaitara	Kadai	Soidabad
		Changacha	Changacha	Changacha
		Pachthakuri	Pachthakuri	Changacha
		Bahuka	Gojaria	Ratankandi
		Ratankandi	Ratankandi	Ratankandi
		Chilgacha	Ratankandi	Ratankandi
		Shimanto	Kurali	Ratankandi
	Boat Ghat (jetty)	Pachthakuri	Pachthakuri	Changacha
		Ratankandi	Ratankandi	Ratankandi
Kazipur, Siraganj (27.20 - 40.13 km)	Bazaar	Kunkunia	Kunkunia	Maizbari
		Patokgram	Pattagram	Gandhail
		Hatkholia	Suvgacha	Shuvogacha
	Boat Ghat (jetty)	Meghai, Kazipur	Meghai	Kazipur
		Khutbandhi	Meghai	Kazipur
		Dhekuria	Meghai	Kazipur
Dhunat , Bogra (40.13 - 46.850 km)	Bazaar	Mothurapur	Mothurapur	Mothurapur
	Boat Ghat(jetty)	Shimubari	Bhutbari	Bhandarbari
Sariakandi, Bogra (46.850 – 70.00 km)	Bazar	Dhekuria	Pardebdanga	Kutubpur
		Kutubpur	Chandanbaisha	Kutubpur
	Boat Ghat (jetty)	Kutubpur	Chandanbaisha	Kutubpur
		Sariakandi Hardpoint	Dehulkandi	Sariakandi
		Kalitola (PremJamunarGhat)	Kalitola	Sariakandi
Sonatola, Bogra	Bazaar	Noudarga Bazar	Noudarga	Jorgachha
Gabtolli, Bogra	Bazaar	Naruamara	Mehedipara	Naruamara
Sherpur, Bogra	Boat Ghat (jetty)	Kalyani	Kalyani	Sughat

Significance of these impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Mitigation and Management. Stairs and ramps will be built at appropriate places of the river bank protected by revetment, in consultations with the local community. Similarly, stairs and or ramps will be built across the embankment at appropriate places in consultation with the local community. For vehicular traffic, road crossings will be included in the road design; for pedestrian crossing appropriate arrangements such as zebra crossings and foot bridges will be included in the road design.

The following locations have been identified as a result of the field surveys for the possible intersections along the road:

• Pachthakuri	• Kalitola
• Chandanbaisha	• Paikortoli
• Digholkandi	• Dhekuria
• Ratankandi	• Madhobdanga
• Khudbandi	• Gosaibari
• Meghai	• Saharabari

During detailed design of road component, the location of the intersections and crossings along the road will be finalized using the following criteria:

- Selection of four arm junction:
 - Bank erosion line is more than 400m away
 - Earthen shank is directly connected to proposed embankment.
 - Big bazaar or growth center is on the river side.
 - Regular all weather crossing route exists
 - Big char area on the river side with habitation.
 - Road crossing the embankment.
 - Proposed alignment is straight and side road from river is perpendicular.
- Selection of T junction:
 - A connection to local road in country side
 - Big bazaar or growth center exists.
 - Regular all weather crossing route exists.
 - Road exists close to alignment
 - To connect nearby upazillas
 - To facilitate traffic for connecting other rural roads.

Residual impacts. With the help of above-specified mitigation measures, potential impacts associated with blocked access will be adequately addressed and hence the residual impacts will be **Low** in significance.

9.4.3. Significant Environmental Impacts during Construction

9.4.3.1. Impacts from Borrow Areas

Potential impacts. During the construction phase, RBIP will need sand for construction of embankment and filling of geo-bags for riverbank protection. A limited quantity of earth will also be needed for embankment cladding. Sand will be extracted from the river banks with the help of small pumps. For the entire works under the Phase I, about 23 million m³ of sand would be needed (see **Table 3.7**). Sand extraction can potentially cause negative impacts on the aquatic fauna although because of the high silt load in the river water, the sand extraction areas will rapidly be covered with fresh sediments hence minimizing any long lasting impacts. Earth if obtained from the cultivation fields can lead to significant impact on the already scarce cultivable land in the area.

Although, the sand extraction locations are not known at this stage, but it can be assumed that the contractors will prefer to collect sand from the nearest shallow semi-permanent sand bars. It is estimated that about 500 ha of riverbed would be affected by the sand extraction during each dry season (basis: about 23 million m³ sand needed; about 10 million m³ sand to be extracted each year along about 50 km river stretch with depth of about 2 m). Sand extraction may potentially decrease the quality of river habitat by increasing the water turbidity which may potentially affect the aquatic fauna including fish and dolphin. If this activity takes place during the breeding season (July to August) of fish and dolphin then it may negatively affect their population dynamics as well. The sand extraction if carried out during nighttime may potentially affect the wintering birds that are mostly found on chars.

Several carp spawn collection area, some *koles* (embayment), and important *charlands* having waterfowl habitats were identified during the baseline survey. The sand extraction may potentially temporarily impact these areas by reducing feeding ground, creating noise, illumination, and increasing water turbidity. In addition, benthic fauna, phytoplankton and zooplankton may potentially be affected at the sand extraction sites ultimately disrupting the food chain, and as a result, tertiary level animals such as fish, birds, and dolphins that feed on these primary and secondary level fauna are likely to temporarily leave the area. The loss of fish production from the affected river area due to sand extraction is estimated to be about 45 tonnes during each year of sand extraction (considering that the annual fish production rate of the Jamuna river is 90kg/ha/year). The disturbed river productivity will be restored by next flooding season due to natural sedimentation process of the river. Furthermore, this temporary loss will be more than compensated with the expected increase in the fish production on a permanent basis

Significance of the above impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The contractor will be required to prepare the Borrow Area Management Plan and obtain approval from the construction supervision consultants (CSC). Sand extraction from river bank will be carried out in an environmentally and ecologically safe manner. Only small quantities of sand will be collected from any single location and stretches of riverbank will be left undisturbed between the locations from where the sand is extracted – in order not to disturb long, unbroken stretches of river bank thus allowing the aquatic fauna to rejuvenate at the sand extraction locations. Sand extraction will not be carried out at or in the vicinity of sensitive habitats.

The contractor will obtain clearance from the CSC before sand extraction can be carried out at any particular location. The CSC will issue this clearance after surveying the area and ensuring that no critical habitat exists at such location.

Monitoring will be initiated during the construction phase and continued thereafter to determine any long lasting impacts of sand extraction and to identify any mitigation measures if so needed. The ToR of the monitoring is presented in **Annex E**.

No earth will be obtained from any cultivation fields; the existing embankments will be excavated to obtain the earth required for the embankment cladding.

Water will be obtained from the existing sources after reaching agreements with the relevant community and after paying the appropriate cost. Otherwise new tube-wells will be installed but maintaining safe distances from the existing ones thus ensuring no draw down of water in them. The GRM will also be put in place to address community complaints.

Residual impacts. With the help of the mitigation measures described above, the potential impacts associated with sand extraction and water procurement will be adequately addressed and hence the significance of the residual impacts is likely to be **Low**.

9.4.3.2. Air Pollution and Greenhouse Gases Emissions from Construction Works

Potential impacts. Construction of bank revetment, embankment and road works will generate emissions from excavation equipment, other machinery and construction traffic. The emissions will also include greenhouse gases (GHGs) from engine fuel combustion (exhaust emissions) and evaporation and leaks from vehicles (fugitive emissions) and emissions from asphalt works. **Table 9.24** shows the total emissions of Reactive Organic Gases (ROG), carbon monoxide (CO), nitrogen oxides (NO_x), sulfur oxides (SO_x), particulate matter (PM), carbon dioxide (CO₂), methane (CH₄) and nitrous oxide (N₂O) generated by construction of embankment and revetment (from 2015 to 2019) and road works (from 2019 to 2020). Total GHG emissions in terms of CO₂ equivalent are shown in **Table 9.25**. It is estimated that about 0.019 million tonnes of CO₂ will be emitted during the six years of construction period from all the construction activities. The emissions from construction activities will deteriorate the ambient air quality and affect the public health. The dense populated areas and crowded market places (bazaars) are particularly vulnerable to these impacts. In addition, dust generated from the above activities will also have impacts on crops and livestock. These impacts have been assessed as Moderate Adverse.

Table 9.24: Total Emissions (in tonnes) from Construction Equipment Usage

Year	ROG	CO	NO _x	SO _x	PM	CO ₂	CH ₄	N ₂ O
2015	4.8	22.3	34.4	0.043	2.0	3,797.9	0.4	0.2
2016	4.8	22.3	34.4	0.043	2.0	3,797.9	0.4	0.2
2017	4.8	22.3	34.4	0.043	2.0	3,797.9	0.4	0.2
2018	4.8	22.3	34.4	0.043	2.0	3,797.9	0.4	0.2
2019	5.2	23.3	35.4	0.037	2.1	3,894.4	0.5	0.2
2020	0.4	1.0	0.9	0.001	1.8	96.5	0.0	0.0
Total	24.8	113.6	174.1	0.2	10.4	19,182.3	2.2	1.0

Note: List of equipment used for construction works and emission factors are given in **Annex G**.

Table 9.25: Greenhouse Gases Emission during Construction (in tonnes)

Year	CO ₂	CH ₄ (CO ₂ e)	N ₂ O (CO ₂ e)	Total CO ₂ e
2015	3,797.9	10.9	130.6	3,939
2016	3,797.9	10.9	130.6	3,939
2017	3,797.9	10.9	130.6	3,939
2018	3,797.9	10.9	130.6	3,939
2019	3,894.4	11.7	140.2	4,046
2020	96.5	0.8	9.7	107
Total Project	19,182	56	672	19,911

Note: Conversion factors are from IPCC 2007 Fourth Assessment Report (pg. 212)

Mitigation and management. To mitigate deterioration of air quality and generation of dust, following measures will be taken:

- The equipment and vehicles used during the construction process will comply with the national standards on emission exhausts.
- Concrete batching and asphalt plants will be located minimum 500 m away from residential areas and will have appropriate dust/emission suppression mechanisms such as wet scrubbers.
- Contractor will implement dust prevention measures such as watering of roads near the residential areas and spraying of water on loose material where required and appropriate.
- Continuous air monitoring will be carried out near the sensitive receptors (**Table 9.22**) to ensure ambient air quality remains within the EQS limits.
- Construction materials will be stored away from the residential areas and will be properly covered.
- Measures will be taken to protect the workers from excessive dust.
- A grievance redress mechanism (GRM) (discussed later in the document) will be put in place to receive complaints from public on various aspects of environmental issues, including air pollution. These grievances will be addressed by the contractor by adopting necessary pollution control measures. Continued consultations with the affected communities will be carried out during construction phase.
- To reduce the greenhouse gases emissions, a series of vehicle exhaust emission controls will be implemented. These include regular maintenance of vehicles, plant and machinery in accordance with manufacturer's specifications; monthly visual inspections on vehicle and plant exhausts to identify excessive emissions of smoke, and maintenance undertaken where required; switch off / throttle down all site vehicles and machinery when not in use; and avoid unnecessary idling of equipment.
- In addition, the measures in Environmental Codes of Practice (ECoP) on air quality management will be implemented (ECoPs are discussed later in the document and presented in **Annex H**).

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with air quality deterioration are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.3.3. Noise Pollution from Construction Works

Potential impacts. Noise will be produced by vehicular movement, excavation machinery, concrete mixing, and other construction activities. Noise levels from construction activities will exceed the standards. The schools, religious places and crowded market areas are particularly vulnerable to the increased noise levels. Noise levels resulting from construction works are estimated using US Federal Highway Administration's (FHWA) Roadway Construction Noise Model (RCNM) and presented in **Table 9.26**. These impacts have been assessed as Moderate Adverse.

Table 9.26: Noise Impact from Construction Activities

Source	Noise levels Leq [1h]			
	100 m from source	250 m from source	500 m from source	1000 m from source
Revetment Works	77	69	63	57
Embankment Works	75	67	61	55
Road Works	71	63	57	51

Mitigation and management. To mitigate impacts associated with noise generation, following measures will be taken:

- The equipment and vehicles used during the construction process will comply with the national standards on noise.
- Continuous monitoring of noise levels will be carried out to ensure they do not exceed national standards.
- Contractors will adopt appropriate noise attenuation measures to reduce the noise generation from construction activities. The noise attenuation measures will include, (i) fitting of high efficiency mufflers to the noise generating equipment; and (ii) keeping acoustic enclosures around drilling equipment.
- The construction activities near the settlements will be stopped during night times if high noise values are observed
- A grievance redress mechanism (GRM) will be put in place to receive complaints from public on various aspects of environmental issues, including noise pollution. These grievances will be addressed by the contractor by adopting necessary pollution control measures. Continued consultations with the affected communities will be carried out during construction phase.
- In addition, the measures in ECoP on noise quality management (**Annex H**) will be implemented

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with noise generation are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.3.4. Water Pollution

Potential impacts. During the construction phase, sand extraction and launching of geo-bags along the river bank can potentially cause some localized increase in water turbidity. However this increase in turbidity is not likely to have any significant impact on overall water quality and the aquatic fauna primarily because of its temporary and localized nature.

The construction camps and other site facilities such as offices and warehouses will also generate substantial quantities of waste effluents. The approximate quantities of these effluents are given below in **Table 9.27**. According to these estimates, about 75,000 liters of waste water will be generated from the site facilities on a daily basis.

Table 9.27: Waste Effluents from Construction Camps and Offices

Description	Average Water Consumption (%)	Water Consumption (Liters per capita per day)	Total Daily Water Consumption (for about 300 people) (liters per day)
Washrooms	36.3	90.75	27,225
Laundry	21.0	52.50	15,750
Kitchen	15.2	38.00	11,400
Toilets	17.5	43.75	13,125
Miscellaneous	10.0	25.00	7,500
Total	100.0	250.00	75,000

Basis: Average consumption per capita per day: 250 liters (Source: Shaikha Binte Abedin¹, Zubayed Bin Rakib. 2013. Generation and Quality Analysis of Grey-water at Dhaka City)

Other possible causes of land or water contamination include accidental leakage or spillage of fuels, oils, and other chemicals, and waste effluents released from workshops and washing bays for vehicles.

These effluents can potentially contaminate the drinking water sources of the area and can also be harmful for the natural vegetation, cultivation fields, water bodies, and aquatic flora and fauna. **Table 6.7** (and **Annex C**) includes the location of the water bodies (*khals* and *beels*) in the project area and their distance from the proposed embankment alignment; some of these water bodies are quite close to the alignment (eg, Kothir Pinjira khal, WAPDA khal, and Balia Ghugri khal).

Significance of the above-described impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. A methodology will be prepared for the river bank protection works in which the geo-bag launching will not be carried out in long stretches of the bank simultaneously. In this manner any increased water turbidity will remain limited and localized in nature hence avoiding any significant impact on overall water quality and aquatic fauna.

Similarly, sand extraction will not be carried out in long, contiguous stretches hence minimizing the extent of water pollution caused by this activity.

The contractors will be responsible to prepare and implement a waste and pollution management plan. The Plan will need to be cleared by the Construction Supervision Consultants (CSC) before it can be implemented. The Plan will include categorization and quantities, treatment mechanism (such as retention ponds and septic tanks), and final disposal of various waste streams; monitoring protocols; roles and responsibilities for the personnel assigned to implement the Plan; and documentation requirements.

For avoiding and managing any accidental leakages and spillages, standard operating procedures will be included in the HSE Plan described earlier. Monitoring of drinking water sources and other key water bodies in the area will also be carried out to ensure that these water resources are not affected by the project activities.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with water pollution are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.3.5. Soil Contamination

Potential impacts. Much like water pollution discussed above, soils in the construction area and nearby lands that are used for agriculture will be prone to pollution from the construction activities, construction yards, workers camps and other construction areas. Fuel and hazardous material storage sites and their handling are also the potential sources for soil and water pollution. Improper siting, storage and handling of fuels, lubricants, chemicals and hazardous materials, and potential spills from these will severely impact the soil and water quality and also cause safety and health hazards. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. For avoiding and managing any accidental leakages and spillages, standard operating procedures will be included in the HSE Plan. The contractors will also be responsible to prepare and implement a waste and pollution management plan. For the effluents to be released from workshops, camps, and offices, appropriate treatment arrangements such as retention ponds and septic tanks will be incorporated in the facility design.

The contractor will employ the general criteria for oil and leakage at construction sites, in accordance with the standards set forth by “Guidelines for Oil Spill Waste Minimization and Management” issued by International Petroleum Industry Environmental Conservation Associate which are as follows³⁴:

- **Minor Skill / Leakage:** Soil contaminated by minor spills / leakages (defined as leaks from vehicles, machinery, equipment or storage containers such that the area and depth of soil contaminated is less than 1 sq meter and 75 mm respectively) is to be scraped and burnt in a burn pit, away from population.
- **Moderate Spills** are defined as spills of volume less than or equal to 200 liters is to be contained and controlled using shovels, sands and native soil. These equipment and materials are to be made available at camp sites during the operation. The contaminated soil is to be excavated and stored in a burn area lined with an

³⁴ Source: IPIECA/Energy Institute/Cedre 2004. IPIECA Report Series, Volume-12, “Guidelines for Oil Spill Waste Minimization and Management”

impermeable base. Depending on the volume, the contaminated soil is either disposed off by burning in the burn pit or by specialized treatment such as bioremediation.

- **Major Spills** (defined as spills of volume much greater than 200 liters) requires initiation of Emergency Response Plan. These spills are to be handled and controlled according to the Plan and require special treatment such as bioremediation.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with soil pollution are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.3.6. Generation of Solid Waste and Hazardous Waste

Potential impacts. Solid waste generated during the construction phase will include excess construction material such as sand and soil, faulty/damaged parts, metal scraps, cardboard boxes and containers, and cotton swaths from workshops, and domestic solid waste from construction offices and camps. It is estimated that about 150 kg of domestic solid wastes will be generated daily from the construction camps and offices, as shown in **Table 9.28** below. Most parts of this waste will be bio-degradable.

Table 9.28: Domestic Solid Waste Generation at Site

Per Capita Per Day Waste Generation (kg)	Number of Personnel in Construction Camps	Total Waste Generation per Day (kg per day)
0.5	300	150

In addition to the above, small quantities of hazardous waste will also be generated mainly from the vehicle maintenance activities (liquid fuels; lubricants, hydraulic oils; chemicals, such as anti-freeze; contaminated soil; spillage control materials used to absorb oil and chemical spillages; machine/engine filter cartridges; oily rags, spent filters, contaminated soil, and others). It is imperative that such waste is responsibly disposed to avoid adverse environmental, human health and aesthetic impacts.

Inappropriate disposal of these wastes can lead to soil and water contamination as well as health hazards for the local communities, livestock, and aquatic as well as terrestrial fauna. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and management. Contractors will be required to prepare and implement a Waste and Pollution Management Plan in accordance with the WB EHS Guidelines and ECoP. The Plan will be prepared on the 3R principle (reduce, reuse, and recycle), and will specify appropriate disposal mechanism and place for each type of waste. Particular attention will be focused on hazardous waste and it will not be released to the environment in any circumstance. Complete record will be maintained for waste disposal. The GRM will also capture any complaints related to inappropriate solid waste disposal.

As an environmental enhancement measure, the project will prepare a waste management plan for the communities along the embankment. The Plan will be prepared under the Social Development Plan of RBIP, during the construction phase of the project.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with solid waste generation are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.3.7. Impact on Aquatic Habitat

Potential impacts. Sand extraction from the riverbank, launching of geo-bags, and placement of concrete blocks for the river revetment may potentially disturb the aquatic habitat by increasing the water turbidity (siting impacts of these activities have already been discussed in **Section 9.4.1.5**). Significance of these impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Some sensitive and important habitats exist in the river chars (shoals) for wintering birds and some of the river channels for fish and dolphins. Similarly some of the beels (wetlands) in the floodplain provide important habitat for aquatic fauna. However embankment construction activities are not likely to have any direct impact on terrestrial or aquatic wildlife or their habitat since no sensitive ecological hot spots have been identified along the existing and proposed alignment (see **Tables 6.7, 6.16, and 6.17** and also **Annex C**) for the key sensitive habitats in the area). However any accidental leakage, spillage of contaminants, or dumping of solid waste/debris on land or in water bodies can potentially affect these habitats. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

During the project-related boat traffic, there is a potential risk of collisions with fish and dolphins. This can cause injuries and even fatalities to these species.

Mitigation and Management. The potential impacts on the aquatic fauna can be at least partially addressed by not carrying out sand extraction and revetments along long, contiguous sections of the river bank at a time, as already described earlier. This measure is likely to keep the increased water turbidity and any other impacts on aquatic habitat localized and minimized, in addition to help rejuvenate the benthic fauna. In addition, the geo-bags and concrete blocks are likely to provide habitat for aquatic fauna such as eels. However to further understand the impact of revetment on aquatic fauna and characteristics of the new habitat provided by geo-bags and concrete blocks a long term monitoring and data collection is needed. This will be initiated during the project construction phase and continued thereafter; attempts will be made to involve national and international research and educational organization for this purpose. See **Annex E** for the ToR of this monitoring program.

Boat movement will be restricted to within 500 m of river bank. Motor boat speed will be limited to 15 km/h in accordance with best international practices. Pingers will be used to chase away dolphins from the construction areas thus minimizing the chances of any collision.

Any negative impacts on terrestrial or aquatic flora and fauna through land and water contamination can be adequately addressed by adopting pollution control measures implementation of which will be a binding on the contractors (see **Sections 9.4.3.4 to 9.4.3.6**).

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with aquatic habitat are likely to be somewhat addressed and hence the residual impact is likely to remain **Low to Moderate** in significance.

9.4.3.8. Impact on Charland Habitat

Potential impacts. The construction activities are not likely to affect the wintering birds that are mainly found in the chars (shoals) since these chars are across the river channels and quite away from the construction sites. If any sand extraction activities are located near chars, noise generated from these activities has a potential to affect the migratory birds. However, due to the vast habitat range of these birds along the chars in Jamuna, the project is not expected to have any impacts on the migratory birds. If any construction activities disturb their roosting, hunting and feeding grounds, they would move to another lesser or undisturbed areas without any difficulty. Significance of these impacts has been determined as **Minimal** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The contractors will be required to reduce the noise levels generated from the construction activities by providing mufflers or acoustic enclosures for high noise generating equipment. The Contractor will also raise awareness about the protection of birds among the work force to reduce impacts such as disturbance and poaching.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with charland habitat are likely to be somewhat addressed and hence the residual impact is likely to remain **Minimal** in significance.

9.4.3.9. Site clearance and Restoration

Potential impacts. After the completion of the construction activities, the left over construction material, debris, spoils, scraps and other wastes from workshops, and camp sites can potentially create hindrance and encumbrance for the local communities in addition to blocking natural drainage and or irrigation channels. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The contractors will be required to remove all left over construction material, debris, spoils, and other wastes from the construction sites. The camps sites will be completely cleaned and restored in original condition to the extent possible. No waste disposal will be carried out in water channels (*khals*) or natural depressions and ponds (*beels*).

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with site clearance are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.4. Significant Social Impacts during Construction

9.4.4.1. Impact on Cultural Heritage

Potential impacts. Table 9.22 includes sites and buildings of religious and cultural importance such as mosques, temples and graveyards. Many of these structures will have to be relocated because of the reconstruction and rehabilitation of the embankment. Significance of these impacts has been determined as **Moderate to High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The contractors will be required to prepare code of conduct to be followed by all site personnel - to respect religious beliefs and sites, and to conduct in a culturally appropriate manner. In addition, 'chance find' procedures will be followed in case of accidental discovery of any sites or artifacts of religious, historical, or cultural importance.

Relocation of places such as mosques and temples will be covered under the RAP and the project will cover the entire cost of such relocation or reconstruction.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with cultural resources are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.4.2. Impact on Community Facilities

Potential impacts. A few schools and other community facilities exist along the embankment; a list of such facilities is included in **Table 9.22**. The potential impacts of the project on these schools could include relocation, air quality deterioration, noise, and safety hazards.

The construction activities can potentially damage the existing public and private infrastructures such as local roads, foot paths, and boat jetties. This can further aggravate the sufferings of the local communities because of river bank erosion and floods.

Significance of the above impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Mitigation and Management. Any relocation needs of the schools and other community facilities will be adequately covered under the RAP that has been prepared for the Priority Reach. For noise, air quality, and safety hazard, the contractors will be required to ensure that activities in the vicinity of the sensitive receptors such as schools are carried out in a manner so as to minimize these risks (e.g., carrying out the construction activities after the school time). The construction site will be fenced near such places to minimize safety hazards. Safety signage will be placed and coordination will be maintained with the facility management as well as with the community to minimize the risks. Finally, any complaints of related to project impacts on the sensitive receptors will be addressed through the GRM described earlier.

The RAP covers the replacement and or relocation of the infrastructure that is affected by the direct land take for the project. Other damaged infrastructure affected by the construction activities will be repaired and or restored by the contractor.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with community facilities are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.4.3. Blockage of Local Roads/Routes/Jetties and Traffic Congestion

Potential impacts. Construction activities for riverbank protection may potentially block/hinder access to boat jetties. Similarly, construction works on the embankment may block local roads and routes and may prevent the local people to cross the construction area. Furthermore, the construction works and associated vehicular traffic may cause traffic congestion on local roads, particularly near local markets and boat jetties (see **Table 9.23** for list of the key boat jetties and local bazaars in the area). Significance of these impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2**.

Mitigation and Management. The contractor will prepare and implement a traffic management plan. Consultations with the local communities will be carried out on an on-going basis and the construction schedule will be discussed with them to ensure that blockage of the local routes is minimized. The construction works particularly at/near the boat jetties and local bazaars will be carefully planned to minimize hindrance to the local

communities. The GRM described earlier will address any community grievances related to blocked routes as well. The contractors will be required to prepare and implement a traffic management plan that will be prepared in consultation with the local community and relevant officials.

9.4.4.4. Occupational Health and Safety

Potential impacts. Generally the construction activities will involve large scale excavation, operations of heavy construction machinery and vehicular traffic. These activities may pose health and safety hazards to the workers at site during use of hazardous substances, lifting and handling of heavy equipment, operating machinery and electrical equipment, working near water or at height and more.

The project will need fuels, oils, and asphalt during the construction phase. Inappropriate handling or accidental spillage/leakage of these substances can potentially lead to safety and health hazards for the construction workers as well as the local community.

Significance of the above impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. Standard operating procedures will be used to handle, transport, and store hazardous materials during the construction phase. Contractors will be required to prepare and implement Health, Safety, and Environment (HSE) plan at the construction sites and in construction camps. The Plan will need to comply with the WB Environment, Health, and Safety (EHS) Guidelines and Environmental Code of Practice (ECoP). The Plan will include standard operating procedures for handling with emergencies, accidents, and incidents; roles and responsibilities, training and capacity building requirements; and documentation and reporting protocols. The contractors will have qualified people at the site to implement the HSE Plan. The construction workers will use PPEs. Contractors will also prepare an Emergency Response Plan (ERP) to define procedures and actions in the event of any accidents such as fires. Contractors will also be responsible to provide HSE trainings to their staff and workers and awareness raising of nearby communities.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with health and safety issues are likely to be addressed to a considerable extent and hence the residual impact is likely to be **Low to Moderate** in significance.

9.4.4.5. Community Health and Safety

Potential impacts. During the construction phase, the population living in close proximity of the construction area, people living in and around the potential resettlement sites, the construction workforce and individuals drawn to the area in search of income opportunities will be exposed to a number of temporary risks such as safety hazards associated with the construction activities and vehicular movement, exposure to dust, noise, pollution, infectious disease, and various hazards, including potential conflict with “outsiders” to the project area about employment and income. The influx and accommodation of a large work force will result in increased concerns for the health and safety of local population, including the spreading of sexually transmitted diseases such as HIV/AIDS. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. To address the safety risks for the construction workers, the contractors’ HSE plan will include detailed occupational health and safety (OHS) procedures and protocols. Similarly, the HSE plan will also include measures and

protocols to protect the nearby community against the risk of accidents and mishaps. In addition, the ERP will also include procedures to be followed in case any accident does take place. Community awareness, warning signboards, and area fencing where possible will be some of the key elements of the safety protocols.

To address the health hazards caused by the project, the Public Health Action Plan (PHAP) has been prepared as part of the social safeguard documents. The key interventions proposed under PHAP include the following:

- **Safe drinking water:** Testing of tube well water for households along old embankment and upgrading them if required, as well as safe tube wells in resettlement sites.
- **Hygienic latrines:** water-sealed slab latrines for each household along old embankment and in new resettlement sites.
- **Clean cooking stoves:** provision of clean cooking stoves for each household along the old embankment and in new resettlements
- **Information, Education, and Communication (IEC):** Construction-related risks (for households along embankments), HIV/AIDS, TB, hand washing, maternal health, nutrition for households along the old embankment and in new resettlement.
- **Capacity Building:** Training of upazila and zila (district) public health staff on infectious diseases, emergency care, traumatology and referral; and Training of Skilled Birth Attendant and Community Health Workers.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with the community health and safety issues are likely to be addressed to a considerable extent and hence the residual impact is likely to be **Low to Moderate** in significance.

9.4.5. Environmental Impacts during Operation and Maintenance

9.4.5.1. Potential Changes in River Morphology and Erosion

Potential impacts. The potential changes of the revetment on river morphology may include stabilization and deepening of the river channel. These changes are mostly positive in nature, likely to take place over a long period of time and need to be regularly monitored for better understanding of the phenomenon. Geomorphic studies (Attachment 1 of Feasibility Report) have shown that river bank protection revetments are likely to induce only minor, localized effects on the river morphology. Morpho-dynamic modeling was also carried out to assess the effects of river bank protection structures on water levels, near-bank velocity, bank erosion, and riverbed level. These model investigations confirmed the geomorphic assessment that the planned river bank protection works will only induce localized bed changes. Furthermore, the morphological changes that may be caused by the proposed revetment will not extend beyond the Jamuna bridge since at that location river morphology changes significantly and Jamuna flows mainly as a single channel river. This potential impact has also been assessed as **Moderate**, based upon the criteria described in **Section 9.2**.

Mitigation and Management. To better understand the cause and effect relationship of river bank revetment and morphological changes in the river, a long term monitoring program will be designed and initiated during the project implementation. The monitoring program will continue after the project completion and arrangements will be

made for funds allocation for this program on a sustainable basis. Possibility of engaging national and international educational and research organizations will also be explored. This will in turn help provide resources and manpower for on-going efforts for data collection, monitoring, analyses, as well as planning for future interventions in and around the river.

9.4.5.2. Generation of Solid Waste

Potential impacts. Solid waste will be generated from future toll plaza and also during regular operation and maintenance activities. Hazardous waste will also be generated from road maintenance from removal of asphalt. This waste if not appropriately disposed has a potential to contaminate soil and water resources, thus negatively affecting communities as well as natural habitat. Significance of these impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and management. The BWDB will prepare an HSE Plan that will cover the appropriate disposal mechanism for various types of solid wastes.

In addition, a waste management plan will be prepared for the communities along the embankment, as stated earlier as well in **Section 9.4.3.6**.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with waste generation are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.5.3. Air Pollution from Traffic

Potential impacts.

Emissions from road traffic may affect the ambient air quality along the road embankment. Air quality modeling will be taken up during detailed design of road component to predict the air quality during O&M Phase. Annual GHG emissions from road traffic along 50 km of priority reach are estimated using the EBRD guidance note on 'Methodology for Assessment of Greenhouse Gases' and presented in **Table 9.29**. Annual GHG emissions from future traffic will vary from 0.02 to 0.16 million tonnes. These impacts have been assessed as **Moderate** based upon the criteria described in **Section 9.2**.

Table 9.29: Annual GHG Emissions (t) from Road Traffic

Vehicle Type	Emission Factor (t/km)	Traffic in 2014*	Traffic in 2039	Annual Emissions in 2014	Annual Emissions in 2039
Cars	0.00027	161	1191	793	5869
Light Vehicles	0.000325	501	3709	2971	21999
Medium Vehicles	0.000325	1708	12633	10130	74929
Heavy Vehicles	0.000535	823	6088	8035	59442
Total		3,193	23,621	21,931	162,239

*Note: According to economic analysis of the project, the traffic in 2014 represents the current level of traffic if the road is already built

Mitigation and Management. The following measures will be implemented to address the air quality issues:

- During design of road component, various options to reduce the traffic congestion will be considered to reduce traffic emission. These measures could include: (i) minimizing grade changes, at-grade crossings, and sharp curves which can promote congestion and (ii) design of roadway to shed water to minimize rolling resistance, as well as to enhance safety
- The road surface will be maintained regularly for smooth traffic flow and reduction of vehicular emissions
- Tree plantation will be carried out along the road embankments to reduce the impacts on air quality.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with air quality are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.5.4. Noise Pollution from Traffic

Potential impacts. During operation, noise levels along the Project roads will be increased due to the higher traffic volume. Traffic noise will be a significant nuisance to the sensitive receptors such as schools and religious places located very close to the road. The traffic noise levels will depend on road way profile, horizontal alignment, road and receptors elevation, number of lanes, average daily traffic with type of vehicles, speeds, receiver location, nature of intervening ground, and the presence of noise shielding elements. Since most of this information will be available only after design of the road, a detailed traffic noise modeling will be carried out during detailed design phase of the road component (2016-2018). Based on the outcome of the noise modeling, noise barriers will be constructed near the sensitive receptors. However, a preliminary assessment has been carried out to predict the traffic noise levels using US Federal Highway Administrators Traffic Noise Model (FHWA TNM 2.5). The predicted noise levels for 2039 traffic from edge of the road to 50 to 250 m are given **Table 9.30**. Without construction of barriers or development of plantation along the road, the noise levels within 50 m of road will exceed the national standards. These impacts have been assessed as **Moderate**, based upon the criteria described in **Section 9.2**.

Table 9.30: Predicted Peak Traffic Noise Levels

Distance from Road Edge (m)	Peak Traffic Noise in 2039 Leq (1hr), dB
50	61.1
100	53.6
150	50.1
200	47.6
250	41.1
Standards	GOB: 50dBA for residential area, and 60 dBA for mixed area World Bank: 55 dBA

Mitigation Measures. The following measures will be implemented to address the noise quality issues:

- During design of road component, a detailed traffic noise modeling will be carried out to design noise barriers (e.g. walls, vegetation) along the embankments to reduce the noise levels near sensitive receptors such as schools.
- GRM will be established to address complaints particularly from the communities along the road.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with noise generation are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.5.5. Water Pollution

Potential impacts. Generally paved road increases the amount of impermeable surface area, which increases the rate of surface water runoff. Increased storm water flow rates can lead to stream erosion and flooding downstream; cause soil erosion, channel modification and siltation of streams.

During the O&M phase, some localized increase in turbidity may take place during any maintenance works on the bank revetment. Similarly, the maintenance works can also generate a limited quantity of waste effluents.

Significance of the above impacts has been determined as **Moderate** based upon the criteria described in **Section 9.2.** This aspect will be further assessed during the third phase of RBIP.

Mitigation and Management. Appropriate storm water drainage arrangements will be included in the road design. The runoff will be released in a manner that it does not cause soil erosion. To address the potential issues associated with waste effluents generated by O&M activities, the HSE Plan prepared by the BWDB also mentioned earlier will include disposal mechanism for waste effluents as well.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with storm water are likely to be adequately addressed and hence the residual impact is likely to be **Low** in significance.

9.4.6. Significant Social Impacts during Operation and Maintenance

9.4.6.1. Community Health and Safety

Similar to construction activities, significant community health and safety issues associated with the maintenance activities will include pedestrian safety, traffic safety and emergency preparedness. Pedestrians will be at greatest risk of serious injury from collisions with moving vehicles. Collisions and accidents can involve a single or multiple vehicles, pedestrians or bicyclists, and animals.

Emergency situations most commonly associated during O&M phase will include accidents involving single or multiple vehicles, pedestrians, and/or the release of oil or hazardous materials.

Toll Plaza and maintenance personnel at work will be subjected to physical and chemical hazards and noise. Maintenance personnel and landscaping workers working on right of way vegetation will be exposed to variety of physical hazards, particularly from operating

machinery and moving vehicles and also working at elevations on bridges and overpasses.

Chemical hazards in operations and maintenance activities may be principally associated with exposures to dust during construction and paving activities; exhaust emissions from heavy equipment and motor vehicles during all maintenance activities; potentially hazardous dust generated during bridge paint removal; herbicide use during vegetation management; and diesel fuel used as a release and cleaning agent for paving equipment.

Significance of the above impacts has been determined as **High** based upon the criteria described in **Section 9.2**.

Mitigation and Management. During the O&M phase, the BWDB will be required to implement HSE procedures and prepare its own ERP. For the safety hazards associated with vehicular traffic on the embankment road, standard road signage and other safety measures such as Zebra Crossings and pedestrian walk-overs (bridges) are being included in the road design. Community awareness raising about these risks will be carried out during the construction phase and will also be included in the IEC component of the social development program.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with safety hazards are likely to be addressed to a considerable extent and hence the residual impact is likely to be **Low to Moderate** in significance.

9.4.6.2. Risk of Embankment Breaches and Emergency Response Mechanism

Potential impacts. Though the RBIP aims to strengthen the embankment, breaches can still take place because of a variety of reasons such as earthquakes and riverbank erosion. Such breaches in the post RBIP completion phase can potentially cause considerably higher losses than currently being incurred because of the intensified cultivation and increased area development that is likely to take place because of the enhanced protection against riverbank erosion and floods, as described earlier as well. Significance of the these impacts has been determined as **High** based upon the criteria described in **Section 9.2**

Mitigation and Management. The BWDB's O&M procedures include regular monitoring of the embankment and its structural integrity, ensuring that the breaches can be prevented (see **Section 3.5**). The BWDB will also prepare an ERP that will address among others embankment breaches.

Residual impacts. With the help of the above mitigation measures, the potential impacts associated with embankment breaches are likely to be addressed to a considerable extent and hence the residual impact is likely to be **Low to Moderate** in significance.

10. Cumulative Impacts

This Chapter discusses the cumulative and induced impacts of the RBIP.

10.1. Overview

The GoB is planning to rehabilitate existing river training works and flood embankments along both right and left banks of the Jamuna river, and also to construct new river training works and embankments. The objective of the current cumulative impact assessment is to evaluate the combined effects of proposed developments along the both banks of Jamuna River.

The most significant valued environmental components (VECs) related to the proposed developments are identified as morphology and flood affected areas; these VECs are considered for the current EIA study. Significance of these VECs is described later in the Chapter.

10.2. CIIA in Context of RBIP

10.2.1. Study Boundaries

In the context of RBIP, the spatial boundaries of CIIA have been based on the extent of floodplain area of Jamuna in Bangladesh. The length of Jamuna from Indian border to the Ganges (Padma River) confluence is about 220km. The spatial boundary of the CIIA is the floodplain of Jamuna from Bangladesh border with India to the confluence of Jamuna with the Ganges. According to GoB development plans, rehabilitation and construction of embankments and river training works along both banks of Jamuna, and development of a road network along the right bank are considered as future major developments in next 20 years; and hence these projects are considered for CIIA study. Salient features of these developments along the both banks are presented below.

- **Project on Right Bank:** The future development projects on right bank include (i) rehabilitation of 150 km BRE from the Teesta River to the Jamuna Bridge, and also a four lane tolled highway along the embankment under RBIP Project, (ii) construction of about 32 km of new river bank protection works and rehabilitation of about 13 km of existing revetments, six spurs, one hard point and one groyne under RBIP project, (iii) rehabilitation of about 40km length of BRE from downstream of Jamuna Bridge to Chandpur under ADB funded FREMIP project, and (iv) about 100 m bridge over Ghagot and Teesta rivers along with necessary river training works.
- **Projects on Left Bank:** The future development projects along left bank will include rehabilitation of existing bank protection works and embankments, and construction of new bank protections and embankments wherever required after carrying out detailed engineering studies.

10.2.2. Identification of VECs for the CIIA

Based on consultations with various stakeholders, the following valued environmental components (VECs) are identified for the CIIA study. These VECs and their significance are described below:

- **Morphology:** The Jamuna, the largest braided sand-bed river in the world, has profound effects on the land, people and resources along its course in Bangladesh. The river widened by around 50 percent since the 1950s, from about 8 to 12 km. Annually Jamuna consumes several thousand hectares of floodplain land leaving

thousands of people homeless and damaging or destroying infrastructures and terrestrial ecosystem.

- **Flood Affected Area:** Flood damages in Bangladesh are rising due to population growth, economic development with increasing floodplain assets, especially in urban areas, and in places, increased risk of embankment erosion from river instability. The extent of flooded area in Jamuna will be affected by the various water development and inter-basin water transfers by upstream riparian countries.

10.3. Morphology

10.3.1. Background

Jamuna, originally a small distributary channel of Brahmaputra, originates about 10 km downstream of Teesta confluence with Brahmaputra. Sometime between 1776 and 1830, due to avulsion, most of the Brahmaputra River started flowing through the present course of the Jamuna River. The original main Brahmaputra course that existed prior to its avulsion is now followed by a small distributary known as Old Brahmaputra. However, the name 'Jamuna' is now commonly used in Bangladesh for whole length from Indian border to Ganges confluence.

During the last two centuries since the avulsion, the Jamuna River has been undergoing several morphological changes like increasing its width, achieving metamorphosis of its planform and pursuing westward migration. In 1830, the river was a single channel meandering river with an average river width of 6.2 km. By 1930, the river shifted noticeably westward on average by 1.9 km and its average width (5.55 km) was somewhat narrower than that in 1830 (6.24 km). Between 1914 and 1973, the river continued migrating westward while widening significantly and metamorphosing from meandering to braided largely due to the increased sediment inflow resulting from the Great Assam Earthquake of 1950. This period is marked by high rate of widening, high rate of westward migration of centerline and right bank, and high rate of erosion along the right bank (**Table 10.1**). By 1973, the average width of the river had reduced slightly, but rapid westward migration had continued. Between 1973 and 2010, the rate of increase of the average width accelerated to a very high level, although the rate of westward migration of the centerline had slowed. During this period, widening occurred everywhere, although the narrower reaches widened more significantly than wider ones so that river width became increasingly uniform (**Figure 10.1**).

Table 10.1: Summary of Jamuna right bank westward shift and changes in width

Period	Westward shift of right bank per year (m)	Change in average width (km)
1830 – 1914	19	- 0.49
1914 – 1953	106	3.56
1953 – 1973	26	- 0.47
1973 – 2010	45	2.98

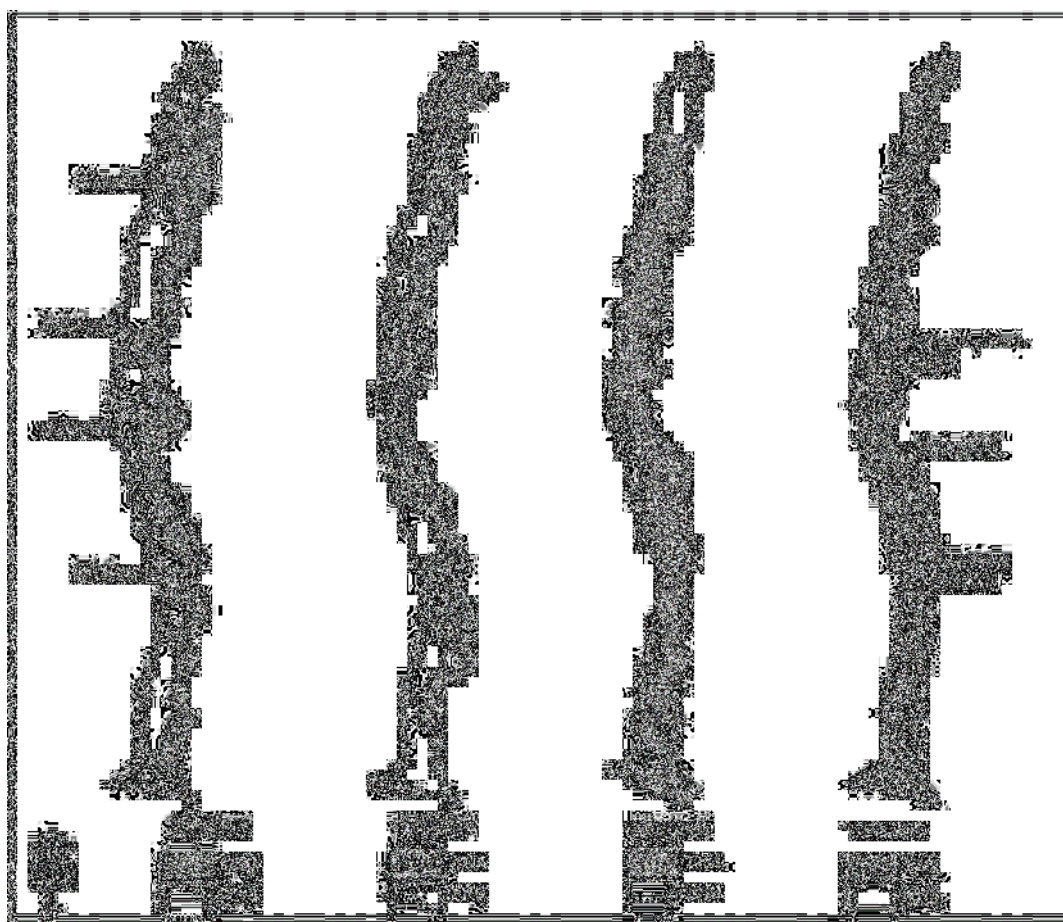


Figure 10.1: Bankline changes of the Jamuna River 1830 – 2010

10.3.1.1. Erosion and Accretion

The historical morphological changes in Jamuna have lead to the significant erosion of floodplain and char land areas impacting floodplain and char dwellers. During last 40 years (1973 to 2014), about 88,000 ha of floodplain land was eroded on Jamuna due to its westward migration and widening. Only 18 percent of this eroded land is accreted along the banks. The extent of erosion and accretion along both banks during this period is shown in and **Table 10.2** and **Figure 10.2**. The total area of the river is increased from 170,000 ha in 1973 to 230,000 in 2014.

Table 10.2 Summary Erosion and Accretion along the Jamuna from 1973 to 2014

	Left Bank	Right Bank	Total
Erosion [ha]	-47,579	-41,089	-88,668
Accretion [ha]	+15,069	+882	+15,950
Total [ha]	-32,510	-40,207	-72,718

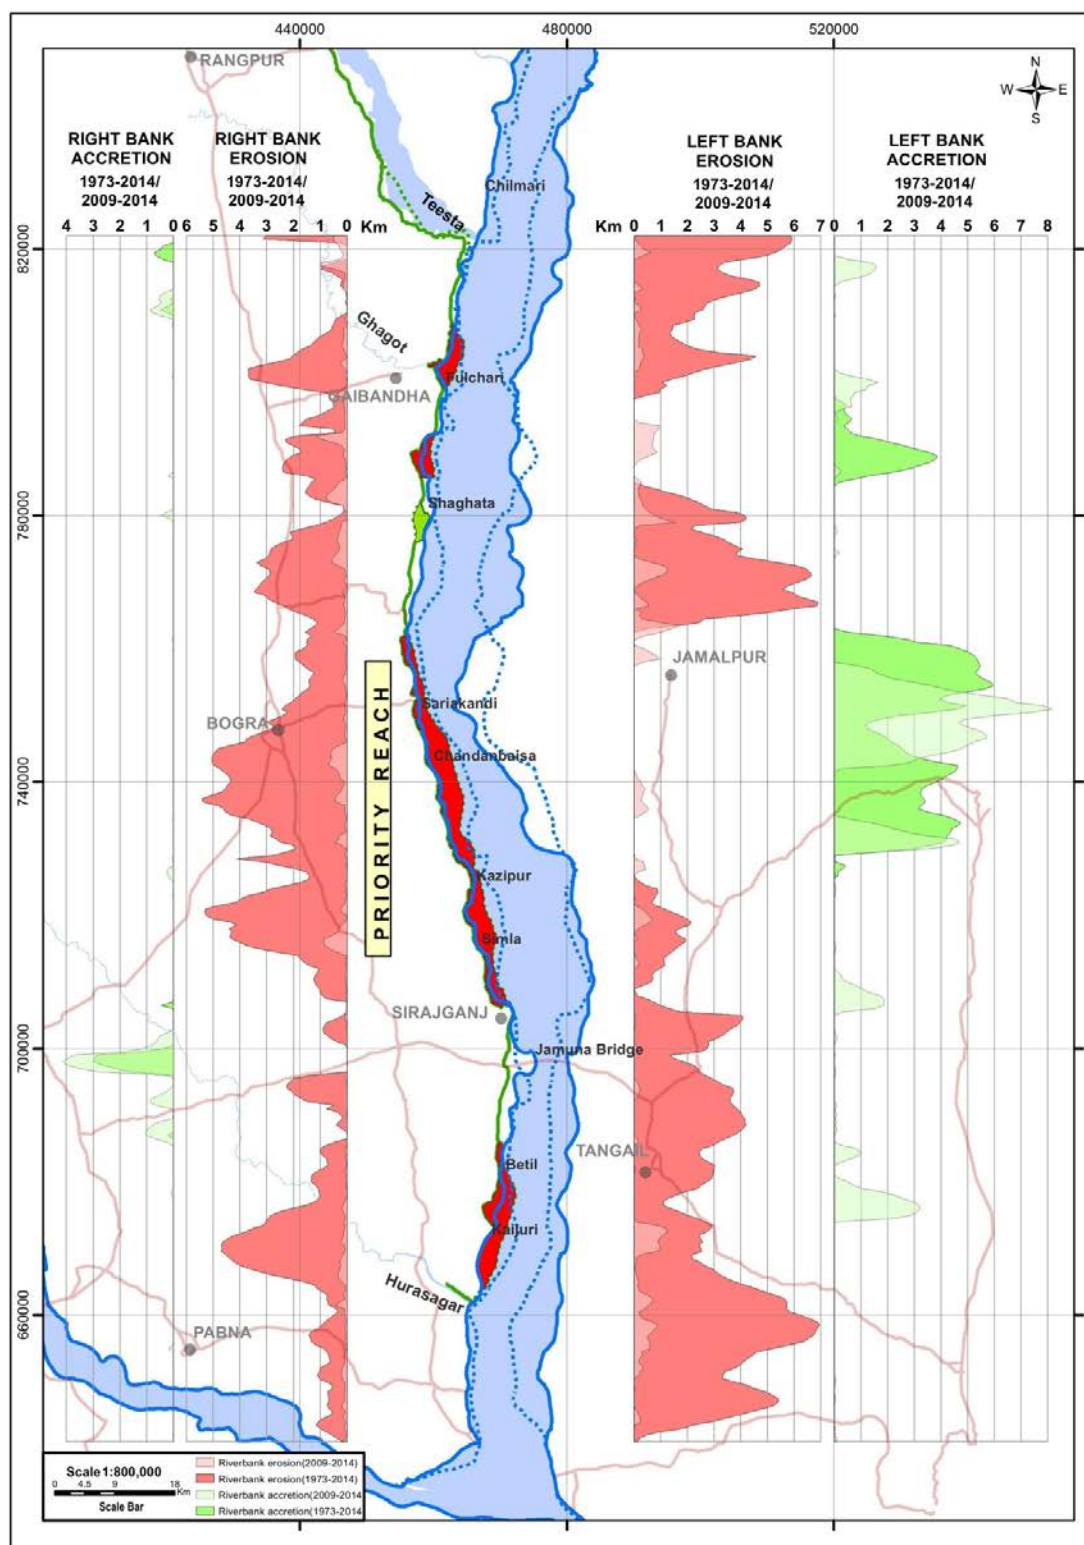


Figure 10.2 Erosion and Accretion of Jamuna from 1973 to 2014

10.3.1.2. Landuse Changes

The widening on both banks during the last 40 years has converted around 73,000 ha of fertile floodplain land (**Table 10.2**) into low lying sandbars and river islands, land that

could have provided living space for around one million people at the present population density.

An example of historical landuse changes (areas of floodplain, charland, sand and water) is shown in **Figure 10.3** for a 70km of Jamuna reach upstream of Jamuna bridge. In this example, the floodplain area decreased from 32,000 ha in 1973 to 5,000 ha at the end of the 1990's, while areas of water and sand (of no arable use) amounted to 20,000 ha. Another area of 7,000 ha consisted of vegetated charland. Since the late 1990s, the floodplain has eroded at a lower rate, while the area of charland increased to around 12,000 ha in the mid-2000's and has since remained quite constant. The river area of water and sand currently fluctuates around 20,000 ha. It thus appears that over the last 40 years half of the lost floodplain land has been replaced by river channels and sand bars, while the other half has turned into charland, which is of lesser agricultural value than floodplain land.

10.3.1.3. Ecological Changes

Changes associated with above landuse also significantly affecting the floodplain ecology, particularly the beels and other surface water bodies that provide habitat for floodplain aquatic species and spawning grounds for migratory fish species.

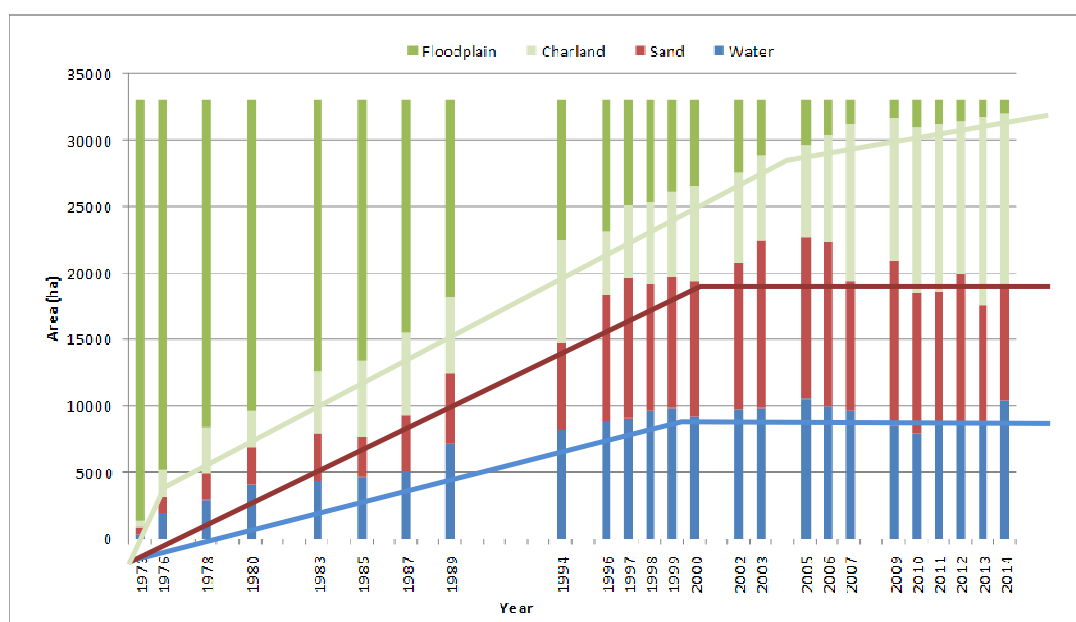


Figure 10.3 Changes of water, sand, floodplain and charland from 1973-2014

10.3.1.4. Population Displacement

The morphological changes in Jamuna have caused forced displacement of about one million people in last 40 years and severely impacted their livelihood sources. A detailed estimate on the population displacement along the right bank for the last ten years is estimated based on the upzila wise population density (**Table 10.3**).

Table 10.3 Summary Erosion and Accretion along the Jamuna from 1973 to 2014

Upazila	Total area	Floodplain area (Within sample assessment) (ha)		Settlement (Within sample assessment area) (ha)		Population	
		2003	2013	2003	2013	2003	2013
Sundarganj	41,467	40	184	4	2	975	1,002
Gaibandha Sadar	31,837	145	20	25	1	2,492	1,666
Fulchhari	31,430	380	28	77	7	6,670	4,424
Saghatta	22,661	800	31	59	2	5,170	5,116
Sonatola	15,652	161	4	49	5	2,098	2,155
Sariakandi	40,585	603	40	390	29	9,995	8,111
Dhunat	24,832	194	17	111	12	4,251	3,084
Kazipur	37,330	714	40	376	35	7,021	6,967
Sirajganj Sadar	31,408	634	969	306	237	29,755	29,142
Belkuchi	16,371	9	15	42	25	791	823
Chauhali	23,994	4	1	14	3	4,222	4,184
Shahjadpur	32,280	995	9	235	5	2,397	2,414
Total	349,847	4,679	1,358	1,688	363	75,837	69,088

The erosion was calculated for the study area of the right bank using bank lines of years 2003, 2011 and 2013. During the period 2003-2011 the estimated total area of erosion is around 3817 ha which might have caused migration of around 2,49,710 people due to river bank. This resulted in average migration of about 31,000 people per year. In last two years 2011-2013, around 1081 ha area had been eroded with displacement of about 6749 people. This resulted in average migration of about 3374 people per year.

10.3.2. Future Trends

For the last 180 years, the morphological changes of Jamuna River have been primarily occurred to extreme natural events such as earthquakes and neo-tectonics. Two of such events, avulsion in the end of 19th century and Assam earth quake in 1950 have shaped the current morphology of Jamuna River.

The future morphological changes are also expected to depend on similar neo-tectonics. Within the Brahmaputra Basin, continued neo-tectonic activity and further seismic events are likely to trigger further avulsions and sediment waves (Goodbred et al., 2003). Consequently, it must be expected that this great river will be disturbed in the future just as it has been in the past, leading to new adjustments of the fluvial system and morphological responses that are likely to cause suffering to hundreds of thousands of people. However, this process is not expected to continue for an infinite period of time.

10.3.3. Cumulative Effects

Structural interventions in the form of hard points, groynes, or revetments are the most effective way to counter riverbank erosion. Since 1990s, various structural interventions have been built on both banks of Jamuna and have worked effectively. Erosion had halted at the locations of structures, but it had been continued at the upstream and downstream of the structures. The bank protection works other than revetments have been found to deflect channel flows and can induce erosion on both upstream and downstream of the protection works. While it is found that the revetments had little impact on the upstream

and downstream areas. Apart from protecting the riverbank, protection works have the potential of attracting the flow and leading to morphological changes.

The cumulative effects of the bank protection works will be very beneficial in controlling further erosion of thousands of Jamuna floodplains and displacement of hundreds of thousands of people. Along the right bank, the projects would save about 14,000 ha of land from erosion and forced displacement of about 172,000 people. The channel flows will be controlled by the structures and it is likely that the channel will flow along the structure maintaining a higher depth. Further, stability of the channels and chars would be increased. Due to stabilized river banks, channels and chars, the cumulative effects on the ecological habitats of both river and charland would be very positive.

However, assessing the impact of structural interventions on a complex braided river like Jamuna is a serious challenge. Post-project monitoring can be very helpful in developing and gaining enhanced understanding of the river responses over time. BWDB, as part of its regular O&M, needs to carry out regular monitoring of bathymetry along the embankments and analysis of time-series of multi-spectral satellite images. From ecological point of view, a regular monitoring program on aquatic and charland biodiversity should be implemented.

10.4. Flood Affected Area

10.4.1. Background

The Brahmaputra river drains almost 0.57 million km², nearly four times the area of Bangladesh. Its main stem and many tributaries flow through four countries: China, India, Bhutan and Bangladesh (see **Figure 10.4**). Water in the Brahmaputra River is the foundation for food production, hydropower generation and other ecosystem services for an estimated 130 million people living within the boundaries of its basin.

The flow of the Jamuna is mainly generated from northeast monsoon precipitation, which is concentrated from June to October. During the rest of the year the flow is generated from base flow and snow/glacier melt in the Himalayas.

Flooding occurs during the months from June to October commonly peaking between July and early September while the lowest water levels are experienced from January to March. The extent of flood affected area in Jamuna catchment area in Bangladesh is about 28,320 km².

The mean monsoon flow of Jamuna at Bahadurabad station was around 40,000m³/s during the period from 1965 to 2006. During the dry season, the discharge is less than 10,000m³/s and as low as 5,000m³/s in early March. During the monsoon season, the monthly discharge varies from 30,000 to 50,000m³/s. The highest floods on the Jamuna River occurred in 1988, 1998, 2004 and 2007.

10.4.2. Future Trends

The flows and water uses in Brahmaputra are expected to change both in near term and long term future due to water development activities in the upstream riparian countries and future climate change. The water development activities can be broadly classified in to hydropower development and inter-basin water transfers.

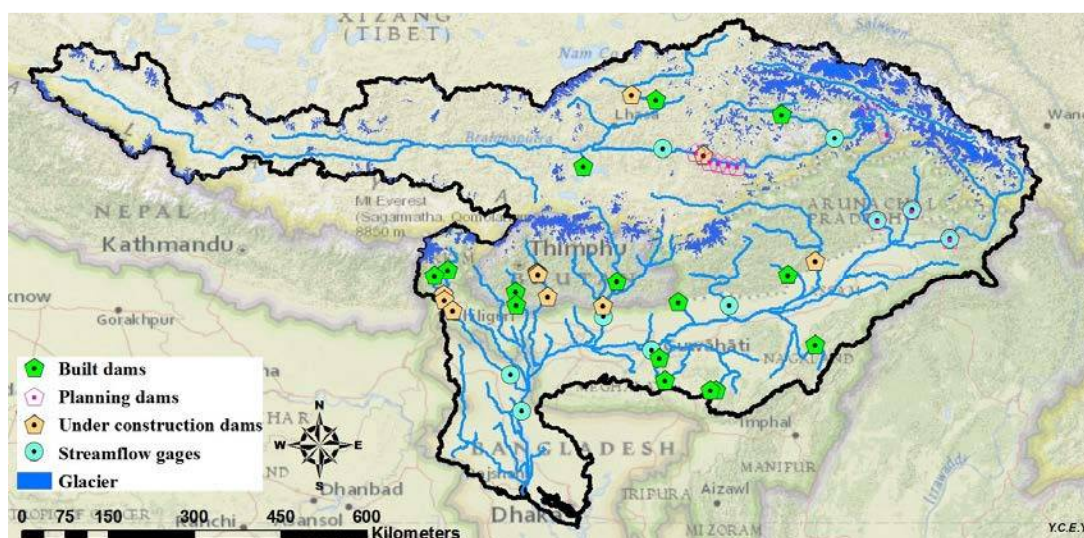


Figure 10.4: Brahmaputra – Jamuna Catchment Area

10.4.2.1. Hydropower dam development

Though there is a huge hydropower potential, Brahmaputra River's water resources have been largely undeveloped. Bhutan, China, and India are all interested in developing the untapped hydropower in the basin (both on the mainstem and the tributaries). About 39 dams are planned in Brahmaputra (**Table 10.4**) and the following ten dams are currently under construction (total installing capacity is about six gigawatts):

- Two dams in China: Pangduo and Zangmu
- Four dams in Bhutan: Dagachhu, Mangdechhu, Punatsangchhu-I and Punatsangchhu-II
- Four dams in India: Subansiri Lower, Lower Teesta III, Lower Teesta IV and Teesta Barrage.

All the above dams are runoff river structures and are expected to be completed by 2020.

Table 10.4: Hydropower Dams on Jamuna in the Upstream Riparian Countries

Country	ID in BSM	Name	installed capacity (MW)	Commission year
China	1	Zhikong	100	2007
	2	Yanghu	90	1998
	3	Pangduo	120	2018
	4	Laohuzui	102	2011
	5	Zangmu	540	2015
	6	Jiacha	360	-
	7	Lengda	510	-
	8	Zhongda	320	-
	9	Langzhen	600	-
	10	Jiexu	510	-
	11	Palong	2760	-
	12	Motuo	38000	-
Bhutan	13	Chukka	84	1987

Country	ID in BSM	Name	installed capacity (MW)	Commission year
	14	Basochuu	64	2001
	15	Kuruchuu	60	2002
	16	Dagachhu	114	2014
	17	Tala	1020	2006
	18	Mangdechhu	720	2017
	19	Punatsangchhu-I	1200	2015
	20	Punatsangchhu-II	1020	2017
India	21	Subansiri	2000	2014
	22	Ranganadi	405	2002
	23	Umrong	200	1976
	24	Khandong	75	1976
	25	Doyang	75	2000
	26	Jamuna Weir	NA	no HP
	27	Teesta V	510	2008
	28	Rangit III	60	2000
	29	Lower Teesta III	132	2013
	30	Lower Teesta IV	160	2013
	31	Teesta Barrage	68	2015
	32	Champamati Barrage	NA	no HP
	33	Sukla Barrage	NA	no HP
	34	Dhanisiri Barrage	20	1992
	35	Uiam-Kyrdemkulai-Nongkhyllam	234	1978
	36	Umtru	11.2	1957
	37	Lower Siang	2700	-
	38	Dibang	3000	-
	39	Demwe Lower	1750	-

Source: Yang et. al. (2014)

10.4.2.2. Water diversion scenarios

China and India are both considering transboundary water diversions to transfer water from the Brahmaputra Basin to water-scarce regions of their countries. Zuo et al. (2008) summarized a number of “Greater Western Route Water Diversion Project” proposals from Chinese government. The proposals include diversion of about 20 billion cubic meters (BCM) per year to 60 BCM per year. The tentative routes of these diversions are:

- starting from Shuo-Ma-Tan (on the main stem of the Brahmaputra), water will be diverted through dams and tunnels to the Niyang River (one major tributary of the Brahmaputra River);
- more dams and tunnels will be built on the Niyang River to divert water to the Yigon Tsangpo River (another major tributary of the Brahmaputra River); and
- after Yigon Tsangpo, water will be sent further north to the Yangtze and Yellow Rivers.

Similar water transfer projects have been proposed in India to divert water from the Brahmaputra River basin to the Ganges River basin through linked canals as part of a national-level River Interlinking Project (Rahaman and Varis, 2009). The “Manas-Sankosh-Tista-Ganga” link is the primary route. Two dams have been proposed on the Manas River and the Sankosh River, and link canals with length more than 250 km would be built. The proposed annual water diversion capacity is 34.43 BCM. **Figure 10.5** shows these two potential water diversion routes.

10.4.2.3. Climate change

The historical hydrologic regime is dominated by two different mechanisms: snow/glacier melt in the upper basin (the mountainous area mostly in China and Bhutan), and monsoon rainfall in the lower basin (the floodplains mostly in India and Bangladesh). Temperature increase and changes in precipitation patterns due to climate change will have different influences on these two mechanisms. Long-term observations (over 40 years) of temperature, precipitation and stream flow in the upper Brahmaputra basin all show increasing trends. This may be partially attributable to melt water from retreating glaciers in the region. In the lower basin, most studies anticipated increases in stream flow as an effect of climate change, resulting from increases in monsoon rainfall.

Temperature increase and precipitation change due to climate change will have different influences on both snow/glacier melt dominated and monsoon dominated flow regime. Modeling results indicate that streamflow is more sensitive to changes in precipitation than changes in temperature, and future GCM projections suggest a warmer and wetter future, resulting in an increase in streamflow in the Brahmaputra Basin.

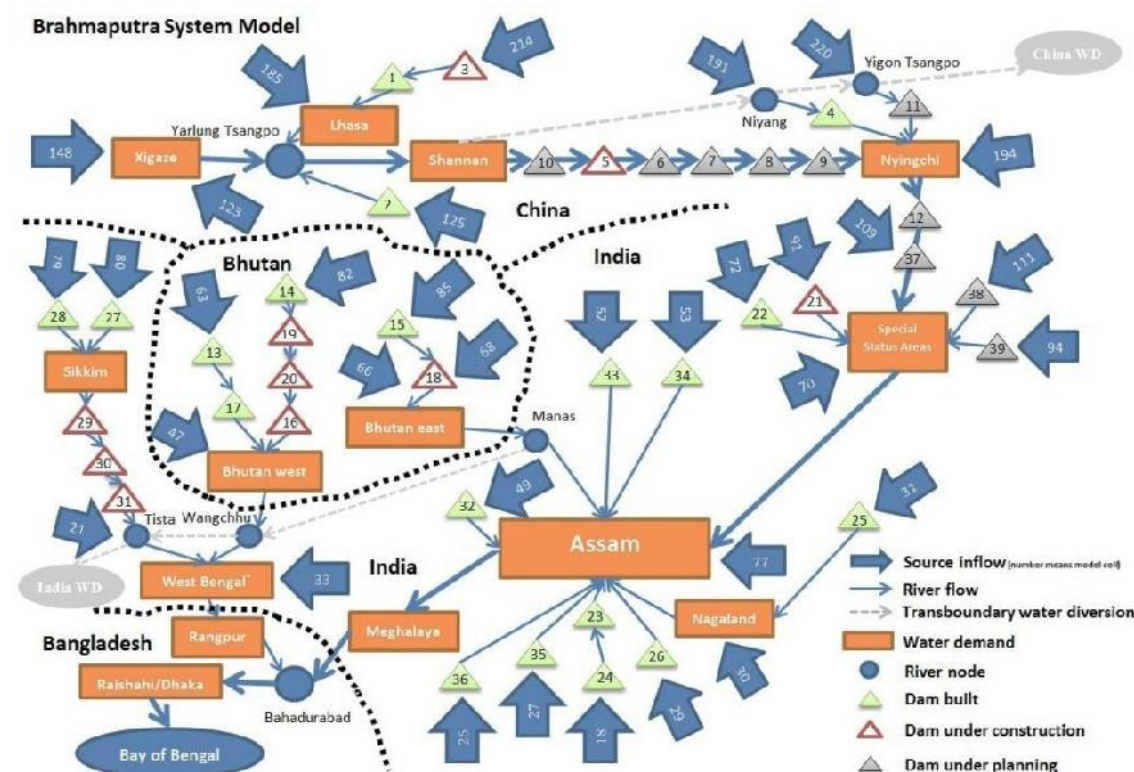


Figure 10.5: Schematic of the Brahmaputra System Model (BSM)

10.4.3. Cumulative Effects

A Brahmaputra System Model (BSM) study was carried out by Yang et. al. (2014) to model the basin-wide water resources management under climatic and social uncertainties. The goal of this study is to address water resources management needs through a coupled modeling framework: integrating a physically-based distributed hydrologic model with a water resources system model to evaluate the impact of climatic and social uncertainties on the basin's water uses, crop production and hydropower generation and the flood affected area (FAA).

The model results are given in **Table 10.5**. When no water diversion occurs, the expected values of FAA will increase by 23 percent, 33 percent and 54 percent for near, middle and far future compare to baseline. China's largest diversion (60 bcm/year) will reduce FAA by 28 percent, 21 percent and 5 percent for near, middle and far future compare to baseline. India's largest diversion (30 bcm/year), although cannot reduce the FAA, will mitigate the increasing trend and FAA will increase by 2 percent, 11 percent and 31 percent for near, middle and far future compare to baseline under India's largest water diversions. The reduction in FAA will partially reduce the flood risk in Bangladesh. However, the reduction in FAA may not affect the agricultural productivity in Bangladesh since the irrigation in the country mostly met from rainfall and groundwater.

Table 10.5: FAA under climate change and upstream diversions impact (2011-2040)

<i>GCM scenarios</i>	<i>Upstream diversions</i>	<i>% change from current FAA</i>	<i>back-calculated FAA using historical modeled value (km2)</i>
RCP 2.6	China-10 bcm	8%	30950.22
	China-20 bcm	2%	29336.89
	China-30 bcm	-13%	25002.42
	China-40 bcm	-24%	21806.99
	China-50 bcm	-30%	19987.18
	China-60 bcm	-33%	19254.49
	India-10 bcm	12%	32168.62
	India-20 bcm	5%	30025.03
	India-30 bcm	-5%	27209.53
RCP 4.5	China-10 bcm	12%	31953.46
	China-20 bcm	6%	30355.63
	China-30 bcm	-9%	25934.84
	China-40 bcm	-21%	22646.72
	China-50 bcm	-28%	20691.76
	China-60 bcm	-30%	19917.54
	India-10 bcm	16%	33196.94
	India-20 bcm	8%	31048.29
	India-30 bcm	-2%	28156.47
RCP 6.0	China-10 bcm	18%	33918.35
	China-20 bcm	13%	32304.24
	China-30 bcm	-4%	27609.36
	China-40 bcm	-16%	24130.19
	China-50 bcm	-23%	21962.25
	China-60 bcm	-26%	21122.67
	India-10 bcm	23%	35232.45

<i>GCM scenarios</i>	<i>Upstream diversions</i>	<i>% change from current FAA</i>	<i>back-calculated FAA using historical modeled value (km²)</i>
	India-20 bcm	15%	32998.40
	India-30 bcm	5%	30014.75
RCP 8.5	China-10 bcm	22%	34795.25
	China-20 bcm	16%	33246.20
	China-30 bcm	-1%	28474.45
	China-40 bcm	-13%	24898.36
	China-50 bcm	-21%	22663.64
	China-60 bcm	-24%	21749.25
	India-10 bcm	26%	36149.10
	India-20 bcm	18%	33891.50
	India-30 bcm	8%	30829.38

Source: Yang et. al. (2014)

The cumulative effects of the proposed developments will reduce the risk of flooding in the Brahmaputra. However the flood embankments, if not properly designed to facilitate lateral fish migration between rivers and floodplains, will have a potential to impact the productivity of floodplain fisheries.

In addition to structural interventions, the following modern flood risk management non-structural types of measures should be considered (**Figure 10.6**):

- Land-Use Controls;
- Development and Building Controls;
- Regional Flood Emergency Planning; and
- Local Flood Emergency Planning or Community-based Flood Risk Management.

In Bangladesh three of the above-listed management measures are applied: structural works, regional and local emergency planning. Structural work is the responsibility of the BWDB, and emergency planning comes under the Ministry of Disaster Management. To effectively address the flood risk management, the following four tools should be developed:

- Integrated Catchment Land-Use Planning;
- Flood Simulation Modelling;
- Flood Forecasting; and
- Flood Warning.

Three of the above-listed tools are already developed: flood simulation modelling, forecasting and warning. Flood simulation modelling is conducted by the Institute for Water Modelling (IWM), and flood forecasting and warning by the BWDB. Further studies are required to develop integrated catchment area landuse planning. The development of integrated landuse planning is also critical to address unplanned developments in the region.

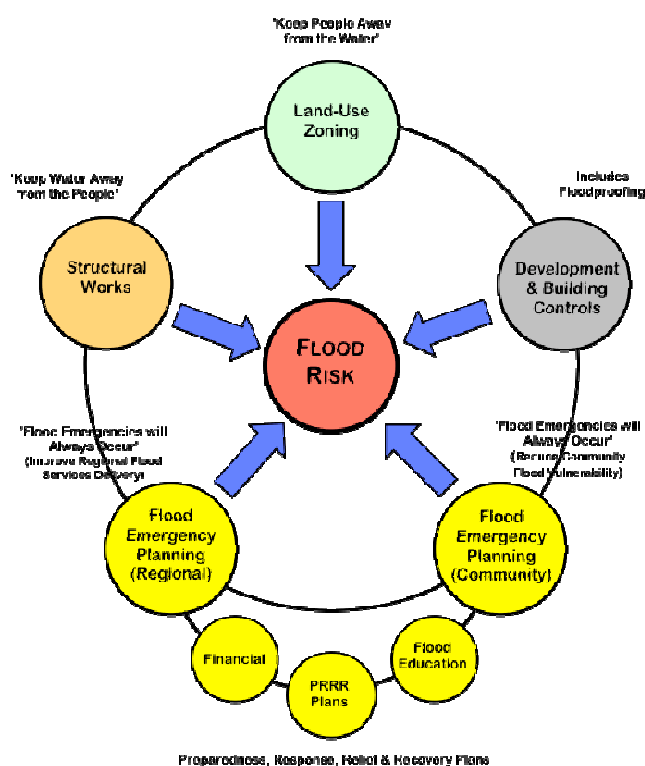


Figure 10.6: The five flood risk management measures

10.5. Induced Environmental Impacts

The north western part of the country particularly the floodplains are comparatively under developed due to continuous threats of erosion and floods from the Jamuna. Construction of bank protection works and flood embankments will lead improved investments and development in the region. Urbanization in Bangladesh is growing in rapid pace especially along the road and railway corridors. With the construction of the highway along the RBIP embankment a rapid uncontrolled and unplanned urbanization may take place around the Project area. Further, the construction of highway will further lead to road network development in the region. All these induced developments may trigger several environmental issues at local and regional level.

A network diagram showing the induced impacts from the construction of bank protection works and tolled highway is shown in **Figure 10.7**. It is expected that the connectivity of the north-western part of the region with the rest of country will provide increased accessibility to markets, ports and growth centers. This will lead to development of business (including agriculture and fisheries), industry, communication, tourism, urbanization, etc. The induced development has both negative and positive impacts. The positive impacts are increase in the socio-economic conditions of the region through employment generation and poverty reduction. The negative impacts are (i) air and noise pollution due to construction activities, increase in traffic levels and industrial development, (ii) generation of wastes due to increased living standards, (iii) consequent health impacts due to pollution and waste generation, (iv) loss of biodiversity, and (v) land acquisition and resettlement. The positive impacts and negative impacts are represented with +/- sign in the network diagram.

The anticipated induced developments in the region and their potential environmental impacts are discussed in the following sections. Most of these impacts could be avoided through development of an integrated catchment landuse planning (Figure 10.6).

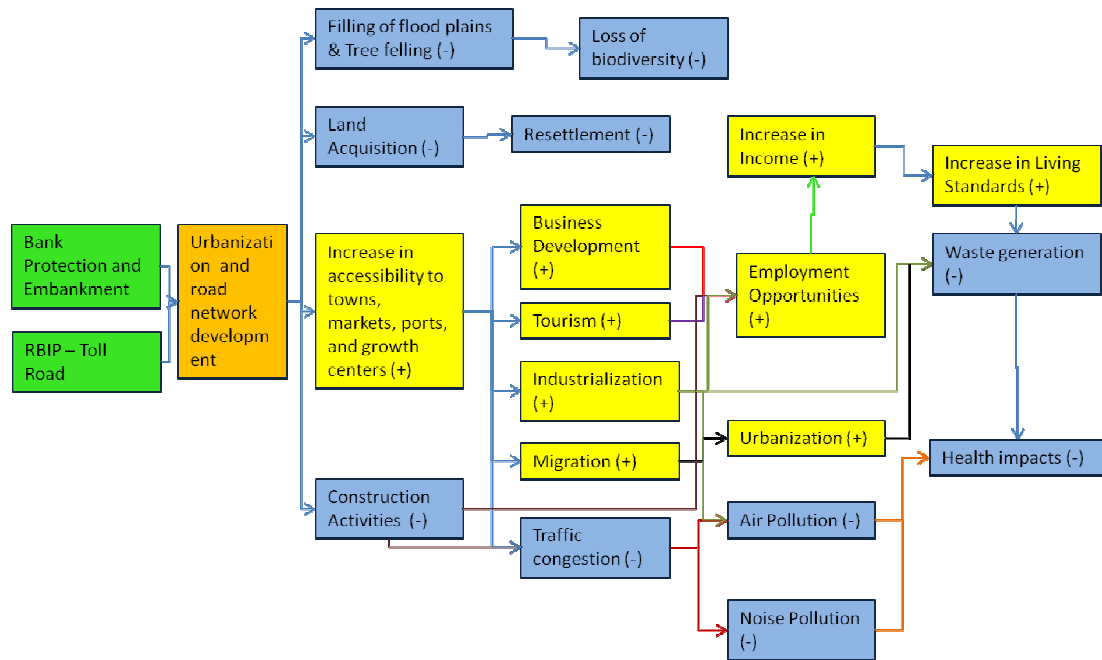


Figure 10.7: Network diagram for impact assessment of induced development

10.5.1. Road Network Development

A new regional road network may be developed connecting the sea ports with Indian border through the proposed RBIP highway. Road network development will entail construction of new roads and up gradation of existing roads that will result in potential significant negative and positive impacts as follows:

10.5.1.1. Major Negative Impacts

The following potential negative impacts have been identified:

- Loss of seasonal floodplain
- Deterioration of roadside air quality
- Land acquisition and resettlement
- Loss of agricultural lands
- Change in landuse

Loss of seasonal floodplain: Construction of roads will require lands which are in Bangladesh low-lying agricultural lands that are seasonally flooded and behave like wetlands during monsoon. Thus the wetlands will be affected significantly. In addition, there are some permanent seasonal floodplains in the country with diversified biological functions, particularly the beels and other permanent wetlands. Construction of roads on these wetlands will have potential significant high negative impact.

Deterioration in roadside ambient air quality: Construction and up gradation activities of roads will generate air emission including dust that will affect population and communities along the existing roads. In addition, after the roads are built, the increased road traffics will also emit air pollutants deteriorating ambient air quality.

Land acquisition and resettlement: Construction and up gradation of roads will require land acquisition which may trigger out involuntary resettlement for affected people therein.

Loss of agricultural lands: Majority of the flood plain lands are used for agriculture purpose and construction or up gradation of roads will result in loss of agriculture lands of a narrow strip over long distances.

Change in landuse: Change in landuse will primarily be from loss of agricultural lands and secondly from roadside development induced after road development. The impact is perceived as potential significant negative as unplanned and haphazard development will have significant negative impact on landuse.

10.5.1.2. Major Positive Impacts

The following potential positive impacts have been identified:

- Employment
- Transport Communication

Employment: Employment generation will occur in the road construction/rehabilitation and in the increased commercial and business activities induced with road network development.

Transport Communication: With the road network development the commercial and business importance in the south western zone will rise significantly. Traffic will be generated locally due to the induced growth. For commercial and business purpose, goods will be carried by multimodal transport from various places within the regions including urban, semi-urban and rural areas. The impact will occur gradually at an increased trend over a long period of time.

10.5.2. Roadside Development

Because of commercial importance of the roads and easy access to regional road network via major roads, roadside developments are expected to get faster pace with the construction of the project. The expected roadside developments are industries, markets/growth centers/shops, housing areas, etc.

The potential significant negative and positive impacts from roadside development are as below.

10.5.2.1. Major Negative Impacts

The following potential negative impacts have been identified:

- Loss of seasonal floodplain
- Deterioration in surface water quality
- Deterioration in groundwater quality
- Waste generation
- Land acquisition and resettlement

- Loss of agricultural lands
- Change in landuse

Loss of seasonal floodplain: Loss of seasonal floodplain will result primarily from earth filling of roadside low-lying lands. These lands are seasonally flooded, habitats for fishes/aquatic life, birds during monsoon/wet season and used as agricultural lands during dry period.

Deterioration in surface water quality: Roadside developments will generate several types of wastes during their construction and O&MM stages. Typical wastes are likely of solid and liquid which may further be classified as hazardous/toxic and non-hazardous/non-toxic. Disposal of these wastes without treatment will contaminate surface water surrounding the dumping sites. Contamination of surface water quality will have potential significant negative impact on biological functions of surface water as well as fish/aquatic life resources therein.

Water Supply and Sanitation: Roadside development will require safe drinking water supply and sanitation facilities in selected locations. Unplanned development will pose great risk of waterborne diseases to infants and young children and people who are debilitated or living in unsanitary conditions and elderly. BWDB needs to coordinate with other departments and regions especially Local Government and Engineering Department for identifying locations for water supply and sanitation facilities along the corridor. And expedite the development of these infrastructures along the corridor to cash in the full advantage of the Asian Highway.

Deterioration in groundwater quality: Deterioration in groundwater quality is likely to occur due to the dumping of untreated wastes. Leachate of wastes that contains hazardous elements will percolate soils reaching groundwater contaminating the natural resources.

Waste: Wastes will be generated during construction and O&M of roadside development, and unless they are properly managed they will cause severe impact on environment. Particularly industrial hazardous wastes would affect the health quality of the workers as well as will contaminate soil and water at their dumping locations.

Land acquisition and resettlement: Widening of the road along road side with the private/public initiative will trigger out land acquisition and resettlement issues and their associated impacts which needs to be properly handled before the start of such activity.

Loss of agricultural lands: Roadside areas are mostly agricultural lands and development along the corridor will have impact on the agricultural lands. The impact is cumulative and will be seen as key issue for all infrastructure development in Bangladesh.

Change in landuse: Change in landuse is from conversion of existing lands, mostly agricultural lands, into residential and commercial lands. Moreover, development works would induce further developments which also have the impact on landuse again.

10.5.2.2. Major Positive Impacts

Employment: Roadside developments including industries, commercial shops, fuel and CNG stations and similar others will generate a lot of employment for different professional categories of people. Employments will also be generated from other sectors, directly or indirectly linked with roadside developments.

10.5.3. Industrialization

In addition, as it happened after Jamuna Bridge Project, private industries are expected to grow along the major roads having good access to the proposed bridge.

Industrialization in the regions will result in both potential significant negative and positive impacts as below.

10.5.3.1. Major Negative Impacts

The following potential negative impacts have been identified:

- Loss of seasonal floodplain
- Deterioration in water quality
- Soil quality
- Waste generation
- Land acquisition and resettlement
- Loss of agricultural lands
- Change in landuse

Loss of seasonal floodplain: Loss of seasonal floodplain will result from construction of industries on roadside floodplain/wetlands, adjacent to major roads and in other areas in the regions

Deterioration in water quality: Industries are likely to produce hazardous and non-hazardous wastes which they may not handle/manage properly and dump elsewhere without treatment. This will deteriorate surface water quality. Surface water contamination during monsoon may spread over large area due to flooding. Unplanned disposal of hazardous/toxic waste may lead to the deterioration of groundwater quality, which may lead to several public health implications related to drinking groundwater. In Bangladesh groundwater is the main drinking water source.

Deterioration in Soil quality/soil contamination: Improper waste dumping will contaminate soil. Liquid wastes generated from industries may be accumulated contaminating surface water, groundwater and soil there. The effect may be widespread due to flooding effect.

Waste: Wastes will be generated at various stages of industrial development, both during construction and O/M. The wastes generated during construction may not be hazardous as maybe case during the operation of the industries. Various types of hazardous and non-hazardous wastes will be generated depending on the type of industries and their extent of operation.

Land acquisition and resettlement: Land acquisition and resettlement issues will arise due to the establishment of various industries including the export processing zone (EPZ).

Loss of agricultural lands: Loss of agricultural lands is associated with land-acquisition for industrial development.

Change in landuse: Change in landuse is primarily due to the transformation of agricultural and other lands to industrial development.

10.5.3.2. Major Positive Impacts

The following potential positive impacts have been identified:

- Employment
- Gender

Employment: Industrial sector is a potential source of employments in Bangladesh. Industries will provide employments to many people directly and indirectly. Several types of industries are expected to be established in the regions such as, textile and dyeing, pharmaceuticals, sea fish/food processing industries, etc. These industries require professionals at various skills and levels and the technicians. Employment will also come from associated business and commercial activities linked with industries. Thus people who are associated with the transportation and export/import business will also be benefited from employments.

Gender: With industrialization, ample job opportunities will be generated for the local people and a part of these jobs are for women. In the textile and garments sector, a large part of the industrial jobs are offered to women because of the job nature and for their skills and efficient performance in this sector. It is anticipated that after the project, textile and garments sector will boost up in south-western part of the country and local women will be highly benefited from it.

11. Environmental and Social Management Plan

This Chapter presents the outline environmental and social management plan (ESMP) of the RBIP project. A more detailed version will be included in the EIA report.

11.1. ESMP Objectives

The basic objective of the ESMP is to manage adverse impacts of project interventions in a way that minimizes the adverse impact on the environment and people of the Project area. The specific objectives of the ESMP are to:

- Facilitate the implementation of the mitigation measures identified during the present EIA and discussed earlier in the document.
- Maximize potential project benefits and control negative impacts;
- Draw responsibilities for project proponent, contractors, consultants, and other members of the Project team for the environmental and social management of the Project;
- Define a monitoring mechanism and identify monitoring parameters in order to:
- Ensure the complete implementation of all mitigation measures,
- Ensure the effectiveness of the mitigation measures;
- Maintain essential ecological process, preserving biodiversity and where possible restoring degraded natural resources; and
- Assess environmental training requirements for different stakeholders at various levels.

The ESMP will be managed through a number of tasks and activities and site specific management plans. One purpose of the ESMP is to record the procedure and methodology for management of mitigation identified for each negative impacts of the Project. The management will clearly delineate the responsibility of various participants and stakeholders involved in planning, implementation and operation of the Project.

11.2. Inclusion of Relevant Components of ESMP in Contract Documents

In order to make contractors fully aware and responsible of the implications of the ESMP and to ensure compliance, it is essential that environmental and social management measures are included in the tender documentation. The various contractors must be made accountable to implement the plans and mitigation measures which pertain to them through contract documents and/or other agreements of the obligations and importance of the environmental and social components of the Project.

Payment Milestones

Payments to contractors would be linked to environmental performance, measured by completion of the prescribed environmental and social mitigation measures. Contractors would be required to join forces with the executing agency, project management unit, supervising consultants and local population for the mitigation of adverse impacts of the project. For effective implementation of the proposed mitigation and monitoring measures they would attract trained and experienced environmental management staff.

11.3. Institutional Arrangements

11.3.1. Construction Phase

The RBIP implementation will be led by the River Management Office (RMO) that will be established within BWDB. The RMO will be headed by the Chief Engineer River Management (CERM) acting as Project Management Unit (PMU) and Project Director (PD). The post CERM was approved in November 2014 as part of the planning wing under the Additional Director General Planning. Further details of the institutional arrangement for the overall RBIP management are available in Feasibility report under the Institutional Arrangement volume.

The overall responsibility of environmental performance including ESMP implementation of the RBIP will rest with the PMU (i.e., RMO). The PMU will engage construction supervision consultants (CSC) (described as the Project Management Consultants in the feasibility report) to supervise the contractors that will carry out the construction activities. The CSC will ensure adherence to the design parameters including quality requirements.

Within the PMU, the environmental and social development unit (ESDU) will be established tasked with implementing the ESMP during the project construction phase. The ESDU will have adequate numbers of environmental and social scientists/specialists and maintain coordination and liaison with CSC for effective ESMP implementation. Similarly, the CSC will also have environmental and social monitors who will supervise and monitor the contractors for effective ESMP implementation. The contractors in turn will also have HSE supervisors who will ensure ESMP implementation during construction activities and will be tasked to implement HSE Plan. The PMU will also engage an independent organization to carry out environmental monitoring during project implementation. The roles and responsibilities of ESDU, CSC, and contractors are presented in **Table 11.1** below.

Table 11.1: Roles and Responsibilities for ESMP Implementation

Organizations	Responsibilities
PMU (RMO)	• Ensure that all project activities are well-managed and coordinated. • Procurement of works and goods. • Payment of compensation to the project affectees • Recruitment and supervision of Construction Supervision Consultants (CSC) • Recruitment and supervision of external monitor and independent Panel of Experts
ESDU	• Ensuring inclusion of ESMP in bidding documents • Supervising CSC for the implementation of ESMP • Ensure that all the project activities are carried out in environmentally sound manner. • Closely coordinate with other concerned agencies, local governments and communities to support implementation of ESMP • Preparation of progress reports on implementation of ESMP. • Ensure effective implementation of ESMP components not directly

Organizations	Responsibilities
	tasked to the contractor including components dealing with indirect, induced and cumulative effects, as well as operations and maintenance stage plans and measures. Commissioning and review of consultant reports for EIAs/EMPs to be developed for subsequent phases of RBIP.
CSC (PMC)	- Supervise civil works, ensuring compliance with all design parameters including quality requirements - Supervising contractors for ESMP implementation - Prepare monthly reports and submit to PMU - CSC will have dedicated environmental and social staff
Contractor	- Responsible for implementation of mitigation and monitoring measures proposed in the ESMP - Each contractor will recruit an Environmental, Health, and Safety Manager (EHSM), who will be responsible for implementing the contractors' environmental responsibilities, and liaising with government agencies. S/he will have adequate number of staff to support him/her for these tasks.
External Monitor	- Independent monitoring of implementation of ESMP - External Monitoring and evaluation

11.3.2. O&M Phase

For the environmental management of the project during the O&M phase, BWDB will establish the Environmental and Social Cell (ESC). ESC will have adequate numbers of the environmental and social specialists.

11.3.3. Environment and Social Development Unit

The ESDU to be established to implement and manage the ESMP will be structured to provide co-ordination, technical support and services during the environmental screening and preparation of EA, and implementation of the environmental mitigation measures. Functions and the staffing responsibilities of ESDU are listed in **Table 11.2** below. In order to effectively manage the EA process and ESMP implementation, the ESDU will be established and made operational before awarding the contract to contractor. One Senior Environment Specialist will be appointed at the head quarter. One environment specialist and one social development specialist will be posted at the field level.

Table 11.2: Functions and Responsibilities of the ESDU

Designation	Function/Responsibility
ESDU (Sr. Environment Specialist)	- Assist the PD in conducting environmental screening and categorization of each phase; - Assist the PD in implementation of the EIA and ESMP during the project implementation period; - Preparation of EA and finalization of the same in close co-ordination with the design consultants and the World Bank;

Designation	Function/Responsibility
	• Ensure integration of the EA and resulting ESMP into the project redesign and implementation plans (contract documents); • Ensure compliance of the mitigation measures by the Contractors; • Ensure incorporation of appropriate environmental specifications into the respective bidding and contract documents; • Assist the BWDB Engineers at site by providing appropriate environmental advice, and developing appropriate environmental mitigation measures; • Documenting the experience in the implementation of the environmental process; • Assist consultant's and BWDB community organizer to carryout participatory consultation during planning, design and implementation; • Assist the PD in obtaining Environmental Clearances from the DOE; • Assist in development of training program for the key stakeholders (BWDB, contractors, public representatives and local government institutions/ NGOs, in collaboration with the field level junior Environmental Specialist; • Review and approve the Contractor's Implementation Plan for the environmental measures, as per the ESMP; • Liaison with the Contracts, CSC for the Implementation of the ESMP; • Liaison with the DOE on environmental and other regulatory matters; • Interact with the NGOs and Community based organizations to be involved in the project for ESMP implementation; • Dialogue with the project affected persons (PAPs) and ensure that the environmental concerns and suggestions are incorporated and implemented in the project; • Undertaking environmental monitoring and reporting to the Project Director and follow-up activities; • Assist field level junior environment specialist to resolve any environment related issue in the project • Document the standard construction practices in the project on incorporation and integration of environmental issues into engineering design and on implementing measures reconstruction/rehabilitation and maintenance programs; • Assist the PD to arrange for the Environmental Auditing and follow up action on the Audit recommendation. • Report to the PD on the environmental aspects pertaining to the project. • To guide and assist the PD and the BWDB to strengthen the environmental management practices in embankment rehabilitation, revetment and road construction. • Ensuring Update of Database for project specific environmental information • Prepare periodic progress reports on the implementation of the EMF/ESMP for transmission to the World Bank throughout the project implementation period. • Update of Environmental Management Plan and Environmental Impact Assessment after receiving information from the contractors and design

Designation	Function/Responsibility
	consultants. • Capacity Building of the responsible assistant and deputy chief responsible for environmental sustainability assurance of BWDB project • Maintaining project-specific Database for Environmental Management
Field Level Environment and Social Development Specialists	• Assist the Design Consultants in Environmental screening process • Assist the PMU in Environmental and Social Assessments for the projects; • Assist PMU in obtaining of requisite Environmental Clearances for the project; • Assist the Senior Environment Specialist and the Environmental Specialist of the Design Consultants and CSC in preparation of the training materials and in conducting training; • Review the contractor's Implementation Plan for the environmental and social mitigation measures, as per the ESMP with assistance from the Environmental Specialist of the consultant; • Liaison with the contractors and CSC on the implementation of the ESMP; • Carry out consultations with the NGOs and Community groups to be involved in the project; • Establish dialogue with the affected communities and ensure that the environmental concerns and suggestions are incorporated and implemented in the project; • Carry out site inspections, check and undertake periodic environmental monitoring and initiate necessary follow-up actions; • Document the good practices in the project on incorporation and integration of environmental issues into engineering design; • Report to the Executive Engineer (Environment) / PD on the environmental aspects pertaining to the project; • Assist in the preparation of periodic reports for dissemination to the PMU, and World Bank.

Under RBIP, the ESDU will provide trainings to the BWDB personnel responsible for monitoring of environmental compliance during the O&M phase of the project. Thus smooth transition to BWDB will happen to ensure environmental compliance during the O&M phase.

11.3.4. Construction Supervision Consultants (CSC)

The CSC will be responsible for supervising the contractors for the implementation of ESMP. For this purpose, the CSC will appoint dedicated environment and social staff to ensure ESMP implementation during the project. They will supervise the contractor for the ESMP implementation, particularly the mitigation measures. They will also be responsible for implementing the monitoring of effects of these measures.

CSC will have the following environmental staff appointed at the site:

- Team Leader (international environmental specialist)
- Environmental Specialists (two national specialists)

- Ecologist (one national specialist)
- Ichthyologist (one national specialist)
- Occupational Health and Safety Specialist (one national specialist))
- Environmental Surveyors (four national)

The environment staff of CSC will closely supervise the construction team to ensure that all environmental commitments are incorporated into the construction activities and work processes. Specific responsibilities include:

- Supervising and supporting contractors in fulfilling their responsibilities as outlined in the ESMP;
- Issuing non-compliance notices to the contractors;
- Providing input, advice, and approval on activity specific work plans relating to ESMP;
- Supervising the implementation of activity specific work plans;
- Regularly reviewing and assessing environmental risks throughout the construction phase;
- Identifying and preparing environmental induction and training materials;
- conducting environmental trainings;
- Assist ESDU in addressing and resolving environment-related complaints and grievances
- Responding to environmental incidents as required;
- Managing compliance reporting as it relates to the Project, and preparing quarterly ESMP compliance reports;
- Liaise with ESDU for effective environmental management at site;
- Reviewing ESMP and revising it if required on six-monthly basis.

11.3.5. Contractors

Each contractor will be required to appoint adequate number of dedicated Environment/Social Officers at the site for the implementation of ESMP in the field, particularly the mitigation measures. The contractor will also be responsible for communicating with and training of its staff in the environmental/social aspects. The contractor will develop the various plans directed towards health, safety, the environment and social issues (discussed later in the Chapter), and get them approved by the CSC before the commencement of the physical works on site. Appropriate numbers of the following personnel are required in the contractor's environmental team:

- Environmental Specialists
- Occupational Health and Safety Specialists
- Environmental Technicians (both for lab and field investigations)

The construction contracts will have appropriate clauses to bind the contractors for the above obligations.

11.4. Environmental and Social Management

Various environmental and social management plans that have been/will be prepared for the RBIP are listed in **Table 11.3** and described in subsequent sections.

Table 11.3: Management Plans

	Plan	Responsibility			Timing
		Plan Preparation	Plan Approval	Implementation	
1.	Environmental Codes of Practice (ECPs)	Consultants	BWDB /WB	BWDB through contractors	Already prepared (Annex H)
2.	Mitigation and Compliance Monitoring Plans	Consultants	BWDB /WB	BWDB through contractors	Already prepared (Tables 11.4 and 11.5)
3.	Material borrowing plan (river sand)	Contractor	BWDB /WB	BWDB through contractors	Within one month of mobilization
4.	Plantation Plan	Consultants	BWDB	Contractors	Already prepared
5.	OHS Plan	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
6.	Pollution Prevention Plans (related to air, noise, soil, water resources)	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
7.	Waste Disposal and Effluent Management Plan	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
8.	Drinking Water Supply and Sanitation Plan	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
9.	Traffic Management Plan	Contractors	CSC and PMU	Respective contractors	Before mobilization of each contractor
10.	Construction Camp Management Plan	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
11.	Fuels and hazardous substances	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor

	Plan	Responsibility			Timing
		Plan Preparation	Plan Approval	Implementation	
	management plan				
12.	Emergency Preparedness Plan (for construction phase)	All contractors	CSC and PMU	All contractors	Before mobilization of each contractor
13.	Emergency Preparedness Plan (for O&M Phase)	BWDB	-	BWDB	During O&M
14.	Resettlement Action Plan	Consultants	BWDB / WB	BWDB	Already prepared
15.	Gender Action Plan	Consultants	BWDB / WB	BWDB	Already prepared
16.	Public Health Action Plan	Consultants	BWDB / WB	BWDB	Already prepared

11.4.1. Environmental Codes of Practice

The environmental codes of practice (ECoPs) are generic, non site-specific guidelines. The ECoPs consist of environmental management guidelines and practices to be followed by the contractors for sustainable management of all environmental issues. The contractor will be required to follow them and also use them to prepare site-specific management plans (discussed later in the Section). The ECoPs are listed below and attached in **Annex H**.

- ECoP 1: Waste Management
- ECoP 2: Fuels and Hazardous Substances Management
- ECoP 3: Water Resources Management
- ECoP 4: Drainage Management
- ECoP 5: Soil Quality Management
- ECoP 6: Erosion and Sediment Control
- ECoP 7: Top Soil Management
- ECoP 8: Topography and Landscaping
- ECoP 9: Borrow Areas Management
- ECoP 10: Air Quality Management
- ECoP 11: Noise and Vibration Management

- ECoP 12: Protection of Flora
- ECoP 13: Protection of Fauna
- ECoP 14: Protection of Fisheries
- ECoP 15: Road Transport and Road Traffic Management
- ECoP 16: River Transport management
- ECoP 17: Construction Camp Management
- ECoP 18: Cultural and Religious Issues
- ECoP 19: Workers Health and Safety.

11.4.2. Mitigations and Compliance Monitoring Plans

The mitigation and compliance monitoring plans are the key element of ESMP and have been prepared on the basis of impact assessment described in **Chapter 9**. The Plans describe the potentially negative impacts of each project activity, lists mitigation and control measures to address the negative impacts, and assigns responsibilities for implementation and monitoring of these measures. The Plans are presented in **Tables 11.4 and 11.5**.

11.4.3. Site Specific Management Plans

Sand borrowing plan will be prepared and implemented by the contractors on the basis of the ECoPs and the mitigation measures given in **Chapter 9** and **Table 11.4**. The Plan will describe among others the methodology to be adopted, restrictions to be followed, prior survey to be conducted, and documentation to be maintained for the sand extraction. The Plan will be submitted to the CSC for their review and approval before initiating the sand extraction activity.

Pollution Prevention Plan will be prepared and implemented by the contractors on the basis of the ECoPs and WBG EHS Guidelines (1997) that will be part of the bidding documents. The Plan will be submitted to the CSC for their review and approval before contractor mobilization.

Waste Disposal and Effluent Management Plan will be prepared and implemented by the Contractor on the basis of the ESMP, ECoP, and WBG EHS Guidelines (1997), which will be part of the bidding documents. The Plan will be submitted to the CSC for their review and approval before contractor mobilization.

Drinking Water Supply and Sanitation Plan: Separate water supply and sanitation provisions will be needed for the temporary facilities including offices, labor camps and workshops in order not to cause shortages and/or contamination of existing drinking water sources. A Plan will be prepared by the contractors on basis of the ESMP and ECoPs, which are part of the bidding documents. The Plan will be submitted to the CSC for their review and approval before contractor mobilization.

Occupational Health and Safety (OHS) Plan will be prepared and implemented by each contractor on the basis of the WBG EHS Guidelines (1997), ECoPs, mitigation plan (**Table 11.4**), and other relevant standards. The Plan will be submitted to the CSC for their review and approval before contractor mobilization.

Traffic Management Plan will be prepared by each contractor after discussion with BWDB and authorities responsible for roads and traffic. The Plan will be submitted to the

CSC for their review and approval before contractor mobilization. The Plan will identify the routes to be used by the contractors, procedures for the safety of the local community particularly pedestrians, and monitoring mechanism to avoid traffic congestion.

Construction Camp Management Plan will be prepared by each contractor. The Plan will include the camp layout, details of various facilities including supplies, storage, and disposal. The Plan will be submitted to the CSC for their review and approval before camp establishment.

Fuel and Hazardous Substances Management Plan will be prepared by each contractor in accordance with the standard operating procedures, relevant guidelines, and where applicable, material safety data sheets (MSDS). The Plan will include the procedures for handling the oils and chemical spills. The Plan will be submitted to the CSC for their review and approval before contractor mobilization.

An **Emergency Preparedness Plan** will be prepared by each contractor after assessing potential risks and hazards that could be encountered during construction. The Plan will be submitted to the CSC/BWDB for their review and approval before contractor mobilization.

Plantation Plan: A plantation plan has been prepared (discussed in **Section 9.4.1.4**) for the trees to be planted on the embankment. The Plan includes the species to be planted, the plantation methodology, and plantation layout.

Resettlement Action Plan (RAP): The Project will require about 340 ha of land and affect a total of 15,558 persons for the construction of embankment. The social impacts largely include loss of residential and agricultural land, residential, commercial and communal structures, as well as loss of income and livelihoods. To address and mitigate these relocation and resettlement impacts, the Resettlement Action Plan (RAP) has been prepared. The RAP is based on the findings of the inventory and census surveys as well as meetings and consultations with various project-affected persons. The RAP presents (a) type and extent of loss of assets including land, structures and trees; (b) principles and legal framework applicable for mitigation of these losses; (c) the entitlement matrix, (d) relocation strategies and plans, including provision for livelihoods; (e) resettlement and rehabilitation budget; and (f) institutional framework for the implementation of the plan, including monitoring and evaluation. It has been designed as a “development” plan, therefore the overall objective of the RAP is to restore and/or improve the living standards of the affected persons from pre-project level.

Table 11.4: Mitigation and Compliance Monitoring Plan – Construction Phase

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
1. Activity: Design / pre-construction considerations						
1.1 Changes in land use, loss of properties, cultivated land and grazing land, relocation of settlements and amenities	– The RAP will be implemented for permanent land acquisition and loss of assets/livelihood and other similar impacts	BWDB PMU	ESDU	– Documentary evidence of RAP implementation – Establishment of resettlement sites – Payment of compensation amounts – People resettling in new villages – Income levels of displaced households – Number of public grievances re resettlement and compensation	Before construction	Included in overall Project cost
	– Contractors will lease the land for construction facilities on temporary basis. Proper documentation will be carried out for this leasing. Site selection will be carried out in consultation with the community and local officials; approval from CSC will also be required for the selected sites.	Contractor	CSC/ESDU	– Documentary evidence of land leasing for temporary facilities – CSC approval for the selected site(s) – Absence of grievances regarding temporary facilities	Before contractor mobilization	Included in contractors’ costs
1.2 borrowing construction material	– A material (particularly river sand) borrowing plan will be prepared	Contractor	CSC/ESDU	– Approved plan – Plan itself will outline appropriate KPIs for its implementation.	Before construction	Included in contractors’ costs
1.3 Disposal of excavated	– Identification of re-use of excavated material on site, to	Contractor	CSC/ESDU	– Availability of plan to dispose excavated	Before construction	Included in contractors’

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
material	- reduce off site effects - Maximization of use excavated material in construction.			material.		costs
1.4 Water quality	- Drainage system will be designed so that all spills will be drained and collected in a sump for further appropriate disposal; and - Oil and chemical storage and vehicle wash and oil change facilities will be established on impermeable surfaces to avoid percolation	Contractor	CSC/ESDU	- Monitoring in accordance with Ground Water Monitoring Program. - No breaches of Material Safety Data Sheet (MSDS) for hazardous substances.	Before construction	Included in contractors' costs
1.5 Traffic Management	A Traffic Management Plan (TMP) will be prepared in accordance with ECoP	Contractors	CSC/ESDU	Approved TMP Plan itself will outline appropriate KPIs for its implementation.	Before mobilization of contractor	Included in contractors' costs
1.6 Construction camp (and other temporary facilities) site selection	- Site for construction camp will be selected with approval from the Construction Supervision Consultants (CSC). - Areas having thick/dense vegetation will be avoided as far as possible. No <i>beels</i> (water ponds) or <i>khals</i> (water channels) will be affected.	Contractor	CSC	Approval from ESDU	Before mobilization of contractor	Included in contractors' costs
1.7 Construction camp management	Construction Camp Management Plan will be prepared per ECoP and approval obtained from CSC.	Contractor	CSC	Approved Plan Plan itself will outline appropriate KPIs for its implementation.	Before mobilization of contractor	Included in contractors' costs
1.8 Waste management	A Waste Management Plan will be prepared per ECoP and approval	Contractor	CSC	Approved Plan Plan itself will outline	Before mobilization of	Included in contractors'

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	obtained from CSC.			appropriate KPIs for its implementation.	contractor	costs
1.9 Fuels and hazardous substances management	A fuels and hazardous substances management plan will be prepared per ECoP and approval obtained from CSC.	Contractor	CSC	Approved Plan Plan itself will outline appropriate KPIs for its implementation.	Before mobilization of contractor	Included in contractors' costs
1.10 Water resource management	A Drinking Water Supply and Sanitation Plan will be prepared per ECoP and approval obtained from CSC.	Contractor	CSC	Approved Plan Plan itself will outline appropriate KPIs for its implementation.	Before mobilization of contractor	Included in contractors' costs
1.11 Occupational Health and Safety (OHS) management	An OHS management plan will be prepared per ECoP and WBG EHS Guidelines, and approval obtained from CSC.	Contractor	CSC	Approved Plan Plan itself will outline appropriate KPIs for its implementation.	Before mobilization of contractor	Included in contractors' costs
1.12 Impacts on aquatic habitat and migratory birds (Dry season data)	A detailed study on aquatic habitat and migratory birds will be carried out by a team of qualified experts, with appropriate mitigation measures outlined.	BWDB	ESDU	Presence of Study report Implementation of recommended mitigation measures	Before construction is commenced	Included in overall Project cost
2. Activity: Contractor Mobilization and Demobilization						
2.1 Traffic management	- The approved TMP will be followed. - Traffic facilities, such as speed limits and signal lights, are to be strengthened - Support to be provided to the local traffic authorities to engage traffic police at the busy junctions - Implement the mitigation measures proposed in ECoP	Contractors (with BWDB's assistance)	CSC/ESDU	- Number of any non-compliance reports - Number of complaints / grievances. - Number of traffic accidents/incidents involving project vehicles and lorries bringing materials and supply to project	During mobilization and demobilization	Included in contractors' costs
2.2 Soil Erosion and	Vehicular traffic on unpaved	Contractor	CSC	Number of any non-	Throughout contractor	Included in contractors'

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
Contamination	roads will be avoided as far as possible. Operation of vehicles and machinery close to the beels and khals will be minimized. – Vehicles and equipment will not be repaired in the field. If unavoidable, impervious sheathing will be used to avoid soil and water contamination. – Waste management plan will be implemented – EQS compliance will be ensured. – ECoP 1, ECoP 5, ECoP 6, and ECoP 7 will be implemented.			compliance reports	mobilization and demobilization	costs
2.3 Air Quality	– Pollution prevention plan will be implemented. – Construction machinery and vehicles will be kept in good working condition and properly tuned, in order to minimize the exhaust emissions, and in compliance with the EQS. – Fugitive dust emissions will be minimized by appropriate methods, such as spraying water on soil, where required and appropriate. – Project vehicles will avoid passing through the communities as far as possible. If unavoidable, speed will be reduced to 15 km/h to avoid excessive dust emissions.	Contractor	CSC	– Number of non-compliance reports. – Number of community complaints. – Ambient air quality found beyond the national standards (EQS)	Throughout contractor mobilization and demobilization	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Air quality will be properly monitored, especially near the population centers and sensitive receptors. Appropriate actions will be undertaken in case ambient air quality at the population centers deteriorates beyond EQS limits. - ECoP 10 for air quality management will be implemented.					
2.4 Noise	-Pollution prevention plan will be implemented. -Noise barriers will be installed where needed particularly near sensitive receptors such as schools - Vehicles will have exhaust mufflers (silencers) to minimize noise generation. - Nighttime traffic will be avoided near the communities. Local population will be taken in confidence if such work is unavoidable. - Vehicular traffic through the communities will be avoided as far as possible. Vehicle speeds will be kept low, and horns will not be used while passing through or near the communities. - Compliance with EQS and WBG'EHS Guidelines will be ensured.	Contractor	CSC	- Number of non-compliance reports; - Noise measurement data - Number of community complaints.	Throughout contractor mobilization and demobilization	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– ECoP-11 will be enforced. – Continued consultations with the affected communities will be carried out.					
2.5 Public Safety	– Occupational health and safety procedures and OHS Plan will be enforced. – Implement fuels and hazardous substances management plan – A Traffic Management Plan will be implemented that will aim at ensuring access to residential areas, and preventing of unsafe situations, especially near schools, housing areas, construction areas, camps and offices. – Special attention should be focused on safety training for workers to prevent and restrict accidents and on the knowledge how to deal with emergencies. – Road signage will be fixed at appropriate locations to reduce safety hazard associated with project-related vehicular traffic. – Liaison with traffic police will be maintained – Project drivers will be trained on defensive driving. – Vehicle speeds near / within the communities will be kept low, to avoid safety hazards.	Contractor	CSC	– Number of any non-compliance reports; – Number of any related public complaints – Number of accidents, incidents and near-misses.	Throughout contractor mobilization and demobilization	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– ECoP-15 and ECoP-18 will be implemented.					
2.6 Damage to Infrastructure	All damaged infrastructure will be restored to original or better condition.	Contractor	CSC	– Number of any non-compliance reports; – Number of any public complaints.	Throughout contractor mobilization and demobilization	Included in contractors' costs
3. Activity: Construction workers camp establishment and operation						
3.1 Soil erosion; soil and water contamination	– Camp management plan will be implemented – location of camp will be selected after obtaining CSC's approval and in consultation with local community – Photographs will be taken to record the site conditions prior to the establishment of the camp. – Land clearing, leveling and grading will be minimized, and carried out in a manner to minimize soil erosion. – Camp will have rainwater drainage arrangements – Camps will have protection arrangements against soil erosion – Vehicular traffic on unpaved roads will be avoided as far as possible. Operation of vehicles close to the water channels, water reservoirs will be minimized. – Contractors will prepare and implement a Waste Management Plan.	Contractor	CSC	– Compliance to the Camp Management Plan, Waste Management Plan – Number of any non-compliance reports – Results of soil and water quality analysis – Number of related complaints	Before and throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- For the domestic sewage, appropriate treatment and disposal system (e.g., septic tank and soaking pits) will be constructed having adequate capacity - Waste oils will be collected in drums and sold to the recycling contractors. - The inert recyclable waste from the site (such as cardboard, drums, and broken/used parts) will be sold to recycling contractors. The hazardous waste will be kept separate and handled according to the nature of the waste. - Domestic solid waste from the camp site will be disposed off in a manner that does not cause soil contamination. - The contractor will identify suitable sites for disposal of hazardous and non- hazardous waste. The selection will be done in consultation with the PMU and the local municipal authorities. No waste disposal will be carried out in <i>khals</i>, <i>beels</i> and rivers. - The camp site area will be completely restored after completion of construction works. All temporary structures will be demolished,					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-3, ECoP 4, ECoP 5, ECoP 6, ECoP 7, ECoP 8, ECoP 16, and ECoP-18 will be implemented.					
3.2 Air Quality	-Pollution prevention plan will be implemented. -Generators and vehicles will be kept in good working condition and properly tuned, in order to minimize the exhaust emissions. -Fugitive dust emissions will be minimized by appropriate methods, such as spraying water on soil, where required and appropriate. -Air quality will be properly monitored, especially near the population centers -EQS compliance will be ensured. -ECoP-10 will be implemented.	Contractor	CSC	– Number of any non-compliance reports – Air quality monitoring data – Number of related grievances	Throughout the construction phase	Included in contractors' costs
3.3 Vegetation loss; threat to wildlife	-Clearing natural vegetation will be avoided as far as possible. -The camp will be established in a natural clearing, to the extent possible. -Any loss or damage to crops or cultivation land will be compensated in accordance with RAP -Complete record will be maintained for any tree cutting.	Contractor	CSC	– Number of any non-compliance reports – Number of tree felled – Number of sighting of key wild species	Before and throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– The camp staff will not indulge in any animal shooting, trapping, catching, or killing activities. – The construction crew will be provided with liquefied petroleum gas (LPG) as cooking (and heating, if required) fuel. Use of fuel wood will be avoided. – Include information on wildlife protection in all tool-box orientation briefings for camp staff – ECoP-12, ECoP-13, and ECoP-14 will be implemented.					
3.4 Noise	– Pollution prevention plan will be implemented. – Noise barriers will be installed where needed particularly near sensitive receptors such as schools – Generators and vehicles will have exhaust mufflers (silencers) to minimize noise generation. – Liaison with the communities will be maintained. – Noise monitoring will be carried out. – EQS compliance will be ensured. – ECoP-11 will be implemented.	Contractor	CSC	– Number of any non-compliance reports – Noise monitoring data – Number of grievances regarding noise	Throughout the construction phase	Included in contractors' costs
3.5 Health and Safety	– OHS plan will be prepared and implemented – Implement fuels and hazardous	Contractor	CSC	– Number of any non-compliance reports – Number of trainings	Before and throughout the construction	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	substances management plan – Drinking water management plan will be implemented – Protective fencing to be installed around the Camp to avoid any accidents. – Contain all fuel tanks in a fully bunded area with a storage capacity of at least 110 percent of the potential storage volume. – Spill control arrangements to be made for hazardous substances (e.g., fuels) – Firefighting equipment will be made available at the camps. – The camp staff will be provided OHS training. – All safety precautions will be taken to transport, handle and store hazardous substances, such as fuel. – Construction camps will have first aid kits – Camp crew will be provided with awareness for transmissible diseases (eg, HIV, hepatitis B and C). – ECoP-2 and ECoP-18 will be implemented.			conducted – Number of accidents, incidents, and near misses.	phase	
3.6 Social and Gender Issues	– Local norms and customs will be respected – Camp crew will avoid entering	Contractor	CSC	Number of non-compliance reports; Number of related complaints	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- the villages - No child labor will be employed in the camps. - Liaison with the community will be maintained. - ECOP 17 will be implemented					
3.7 Damage to PCR	In case any artifacts or sites of archeological, cultural, historical, or religious significance are discovered during construction activities, the works will be stopped, and the Archeological Department will be informed.	Contractor	CSC	- Number of non-compliance reports - Number of reports of any PCR discovery	Throughout the construction phase	Included in contractors' costs
3.8 Increased Load on Local Services and Supplies	- The contractors to procure their supplies in a manner not significantly affecting the availability of essential commodities in the area for the residents. - Grievance redress mechanism will be established to address community complaints and grievances.	Contractor	CSC	Number of related public grievances	Construction phase	Included in contractors' costs
4. Activity: Transportation of Equipment and Construction Material						
4.1 Traffic management	- The approved TMP will be followed. - Traffic facilities, such as speed limits and signal lights, are to be strengthened - Support to be provided to the local traffic authorities to engage traffic police at the busy junctions	Contractor	CSC	- Number of any non-compliance reports - Number of complaints / grievances. - Number of traffic accidents/incidents involving project vehicles and lorries bringing materials and supply to	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– Implement the mitigation measures proposed in ECoP 15.			project		
4.2 Soil Erosion and Contamination	– Pollution prevention plan will be implemented. – Vehicular traffic on unpaved roads will be avoided as far as possible. Operation of vehicles and machinery close to the water channels, water reservoir will be minimized. – Vehicles and equipment will not be repaired in the field. If unavoidable, impervious sheathing will be used to avoid soil and water contamination. – EQS compliance will be ensured. – ECoP 1, ECoP 5, ECoP 6, and ECoP 7 will be implemented.	Contractor	CSC	Number of any non-compliance reports	Before and during construction	Included in contractors' costs
4.3 Air Quality	– Pollution prevention plan will be implemented. – Construction machinery and vehicles will be kept in good working condition and properly tuned, in order to minimize the exhaust emissions, and in compliance with the EQS. – Fugitive dust emissions will be minimized by appropriate methods, such as spraying water on soil, where required and appropriate. – Project vehicles will avoid passing through the communities	Contractor	CSC	– Number of any non-compliance reports – Air quality monitoring data – Number of related grievances	Before and during construction	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	as far as possible. If unavoidable, speed will be reduced to 15 km/h to avoid excessive dust emissions. - Trucks and conveyor belts carrying construction material and excavated soil will be covered if required to avoid air quality deterioration. - Air quality will be properly monitored, especially near the population centers and BWDB colonies - ECoP 10 for air quality management will be implemented.					
4.4 Noise	-Pollution prevention plan will be implemented. - Noise barriers will be installed where needed particularly near sensitive receptors such as schools - Vehicles will have exhaust mufflers (silencers) to minimize noise generation. - Nighttime traffic will be avoided near the communities. Local population will be taken in confidence if such work is unavoidable. - Vehicular traffic through the communities will be avoided as far as possible. Vehicle speeds will be kept low, and horns will	Contractor	CSC	- Number of any non-compliance reports - Number of related public complaints - Noise monitoring data	Before and during construction	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- not be used while passing through or near the communities. - Liaison with the communities will be maintained. - Noise monitoring will be carried out - Compliance with EQS and WBG'EHS Guidelines will be ensured. - ECoP-11 will be enforced.					
4.5 Public Safety	- OHS plan will be implemented - Implement fuels and hazardous substances management plan - Road signage will be fixed at appropriate locations to reduce safety hazard associated with project-related vehicular traffic. - Liaison with traffic police and communities will be maintained - Project drivers will be trained on defensive driving. - Vehicle speeds near / within the communities will be kept low, to avoid safety hazards. - ECoP-15 and ECoP-18 will be implemented.	Contractor	CSC	- Number of any non-compliance reports - Number of accidents, incidents and near misses - Number of related public complaints - Number of trainings provided	Before and during construction	Included in contractors' costs
4.6 Damage to Infrastructure	All damaged infrastructure will be restored to original or better condition.	Contractors	CSC	Number of any non-compliance reports	Before and during construction	Included in contractors' costs
4.7 Blocked routes	- On-going community consultations to be carried out - Proper scheduling of works to	Contractors	CSC	Number of any non-compliance reports	Before and during construction	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	minimize blockage of access to places such as boat jetties • Road signage • Community awareness					
5. Activity: Construction of River Revetment						
5.1 Changes to topography and river morphology	• Not carrying out revetment activities in long, contiguous stretches at a time • Monitoring and data collection of river morphology and habitat condition to be initiated during project implementation. • Monitoring to be continued after construction completion.	Contractor	CSC	– Number of non-compliances observed/reported – Presence of monitoring plan – Evidence of implementation of the above plan.	Throughout the construction phase	Included in contractors' costs
5.2 Soil / riverbank erosion	– Works will be carried out in a manner not to cause river bank erosion – Vehicular traffic near the bank line will be minimized – Protective measures such as mulching will be undertaken to stop erosion – Vehicular traffic on unpaved roads will be minimized – ECoP-6 will be implemented.	Contractor	CSC	– Number of non-compliances observed.	Throughout the construction phase	Included in contractors' costs
5.3 Soil and water contamination	– The contractor will prepare and implement a Pollution Prevention Plan prior to the start of the work. Proper baseline data will be collected. – Construction materials will be stored, used and handled	Contractor	CSC	– Number of non-compliances observed or reported – Monthly auditing of management of hazardous materials against Material Safety Data Sheet	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	appropriately. – Reduce risk of a pollution event through adoption of measures set out in Solid Waste Management Plan and (Drinking Water) and Sanitation Plan – Hazardous and toxic materials to be stored separately – The contractor will identify suitable sites for disposal of hazardous and non- hazardous waste. The selection will be done in consultation with the PMU and the local municipal authorities, avoiding <i>beels</i>, <i>khals</i>, and rivers. – Fuels and hazardous substances management plan will be implemented – Design drainage for the batching plant area to direct runoff into a sump/basin for inspection for pollutants prior to discharge – Design settling basins for the discharges from tunnel construction areas – Any discharges to the river or streams should have turbidity of less than 2 mg/l – Regular waste water streams are to be passed through settling basins. – Undertake pH monitoring of site runoff to ensure alkaline runoff is			– Soil and water quality monitoring data – Number of any non-compliance – Number of related complaints		

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- not leaving the site. - Construct a designated, signposted concrete wash down bay that is fully contained and bunded for all excess concrete and concrete wash down, e.g. plastic lined. - Regularly maintain the concrete washout bay, treating any water prior to release to natural systems. - EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-4, ECoP-5, and ECoP-7 will be implemented.					
5.4 Air Quality	-Pollution prevention plan will be implemented. - Construction materials will be stored in designated areas away from sensitive receptors and covered to minimize dust on site from site construction works - Construction vehicles will be sprayed with water when entering and leaving the site, covered if transporting materials, adhere to speed limits, and engines will be turned off when idling. - Water spraying will be carried out to suppress dust emissions where needed - Batching plants, asphalt plants, and crushers will have	Contractor	CSC	– Number of non-compliances observed or reported – Number of dust-related complaints. – Number of air quality-related complaints, – Air quality monitoring data –	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- appropriate dust and emission abatement systems (e.g., wet scrubber) as appropriate. – Target zero dust related complaints – Target zero air quality related complaints. – EQS compliance will be ensured. – Monitoring of ambient air quality near settlements and colonies. Appropriate actions to be undertaken in case ambient air quality deteriorates beyond EQS limits. – ECoP-10 will be implemented.					
5.5 Health and Safety	– Compliance with Occupational Health and Safety standards and OHS Plan – Implement fuels and hazardous substances management plan – Use of personal protective equipment (PPE) – Construction sites to be cordoned off to stop unauthorized access – Develop controls and standard operating procedures for the use of fuels and other hazardous substances to prevent spills, accidents, and pilferage – Train and designate personnel for various OHS aspects such as spill control procedures, fire fighting – Establish firefighting system and	Contractor	CSC	– Number of non-compliances observed or reported – Number of respiratory protective devices and other PPEs issues to workers. – Monitoring of compliance with Health and Safety standards (including monthly reporting of accidents). – Number of accidents, incidents and near misses. – Number of trainings provided.	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- fire safety (fire extinguishers) at the construction sites where fire is an hazard - Spill kits and trained personnel are to be made available at the workshops. - Contain all fuel tanks in a fully bunded area with a storage capacity of at least 110 percent of the potential storage volume. - Use auto shut down valves for fuel transfer pipes - Transport of hazardous goods and fuel to be done in closed containers and ISO certified tanks - Provision of respiratory protective devices for workers where needed - Designate agreed routes for traffic (set out in the Traffic Management Plan) - Provision of insurance-backed compensation scheme for major injury or loss of life reflecting settlement sums that are consistent with national/international benchmarks. - Contractor to engage a doctor at the site/camp - Construction sites to have first aid boxes - Site to have ambulance to transfer					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- injured/sick workers to nearest hospital – WBG's EHS Guidelines to be implemented – Regular OHS trainings to be provided to workers – ECoP 2 and ECoP-19 will be implemented.					
5.6 Noise and Vibration	– Pollution prevention plan will be implemented. – Noise barriers will be installed where needed particularly near sensitive receptors such as schools – Construction plant producing sound in excess of 85dB will be fitted with mufflers; – Noise monitoring will be conducted – EQS compliance will be ensured. – ECoP-11 will be implemented.	Contractor	CSC	– Number of non-compliances observed or reported – Record of equipment used on site capable of producing over 85dB and whether equipment has been fitted with mufflers – Number of related community complaints – Noise monitoring data – Number of noise related grievances	Throughout construction phase	Included in contractors' costs
5.7 Vegetation loss	– Damage to riverine vegetation will be minimized – Restoration will be carried out for any loss of riverine vegetation. – Avoid dumping material in vegetated areas. – Avoid unnecessary loss of vegetation – ECoP-12 will be implemented.	Contractor	CSC	– Area of riverine vegetation lost/disturbed – Area of riverine vegetation restored	Throughout construction phase	Included in contractors' costs
5.8 Fauna /	– Avoiding launching geo-bags	Contractor	CSC	– Number of instances of	Throughout construction	Included in contractors'

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
aquatic habitat	in long stretches of river bank at a time - Boat movement will be restricted to within 500 m of river bank. Motor boat speed will be limited to 15 km/h in accordance with best international practices. Pingers will be used to chase away dolphins from the construction areas thus minimizing the chances of any collision. - The contractors will be required to reduce the noise levels generated from the construction activities by providing mufflers or acoustic enclosures for high noise generating equipment. The Contractor will also raise awareness about the protection of birds among the work force to reduce impacts such as disturbance and poaching. - ECoP-13 and ECoP 14 will be implemented. - No waste disposal in rivers, khals, or beels. - No hunting, poaching, trapping or harassing of faunal species - Monitoring aquatic habitats			spoil being deposited in non-designated areas. - Number of reported incidences of hunting or poaching on the Project site / in land ownership. - Number of reports of sighting of key wild species - Evidence of initiation of monitoring plan	phase	costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	along the revetment-protected riverbank – Sensitive habitats will be identified before commencing the revetment. Appropriate mitigation actions will be taken if any sensitive habitat is identified at or near the work sites.					
	– Monitoring aquatic habitats along the revetment-protected riverbank – Monitoring of river morphology	BWDB	ESC (of BWDB)	– Evidence of monitoring – Availability of monitoring reports	O&M phase	Included in ESMP cost that is included in overall project cost
5.9 Mortality of Fish	– Works in the water will be minimized – Minimizing increase in water turbidity by avoiding launching geo-bags in long stretches of river bank at a time.	Contractor	CSC	– Number of any non-compliance reports – Any evidence of fish mortality.	construction phase	Included in contractors' costs
5.10 Damage to infrastructure	Any damaged infrastructure such as roads, jetties or culverts will be repaired	Contractor	CSC	– Number of any non-compliance reports – Number of related complaints	construction phase	Included in contractors' costs
5.11 Damage to PCRs	In case any artifact or site of archeological, cultural, historical, or religious significance are discovered during construction activities, the works will be stopped, and the Archeological Department will be informed.	Contractor	CSC	– Number of any non-compliance reports – Number of reports of any new PCR discovered/reported	construction phase	Included in contractors' costs
5.12 Loss of	Local access routes will not be	Contractor	CSC	– Number of related	construction	Included in

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
Access to Villages/ <i>chars</i>	- blocked to the extent possible - Boat/launch jetties will not be blocked to the extent possible - If blockage of routs, roads, or boat jetties is unavoidable, consultations will be carried out with the affected community and alternates will be identified. Work schedule will be prepared in consultation with the communities to minimize impact of blocked access or routes. - Revetment to have stairs/ramps to facilitate access of people and their livestock to the river			community complaints	phase	contractors' costs
5.13 Social conflict due to the Influx of Workers	- Liaison will be maintained with the communities - Contractors and workforce to follow code of conduct - Respect of local norms and values - Implementation of awareness campaign - Complaints from the local community will be addressed by the Grievance Mechanism that will be developed.	Contractors	CSC	Number of public grievances relating to in-migrants	Construction phase	Included in contractors' costs
5.14 Adverse Effects on Health Situation	- The Public Health Action Plan will be implemented. - Raising awareness of the associated risks for the local population. - The awareness campaign will	PMU and contractor	CSC	- Evidence of implementation of PHAP - Number of patients being treated in the local hospitals	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	also be aimed at the risk of interaction between the resident population and the construction work force, including the spreading of sexually transmitted diseases such as HIV/AIDS. – The medical health facilities in the project area will be facilitated to deal with such incidences.					
5.15 Increased Load on Local Services and Supplies	– The contractors to procure their supplies in a manner not significantly affecting the availability of essential commodities in the area for the residents. – Grievance redress mechanism will be established to address community complaints and grievances.	Contractor	CSC	Number of related public grievances	Construction phase	Included in contractors' costs
6. Activity: Construction of Embankment and Road						
6.1 Changes in Land Use	• RAP will be implemented. • GRM will be put in place.	ESDU	Independent monitors	– Documentary evidence of RAP implementation – Percentage of affectees that have received full payment. – Number of related grievances	Before construction	Included in overall project cost
6.2 Changes to land form and topography	– Changes to the land form and topography will only occur in designated areas to accommodate defined project features. – Excavation of material will be kept to a minimum.	Contractor	CSC	– Volume of spoil extracted (monitor against predictions). – All excavated materials to be disposed of in designated sites.	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– Implement ECoP 8.			– Number of non-compliances observed/reported		
6.3 Soil erosion	– Embankment slopes will be re-vegetated – Areas exposed during construction will be re-vegetated ('greened') immediately – Adopt measures set out in the Plantation Plan – Road edge buffers will be re-planted – Replanting to occur prior to the commencement of operation, using fast-growing native species; and grasses to assist slope and soil stability. – ECoP-6 will be implemented.	Contractor	CSC	Compliance with the Plantation Plan. All replanting to be commenced prior to operation.	Throughout the construction phase and prior to operation	Included in contractors' costs
6.4 Soil and water contamination	– The contractor will prepare and implement a Pollution Prevention Plan prior to the start of the work. Proper baseline data will be collected. – Construction materials will be stored, used and handled appropriately. – Excavated material disposal methods to include measures to reduce risk of environmental pollution. – Reduce risk of a pollution event through adoption of measures set out in Solid Waste Management	Contractor	CSC	– Monthly auditing of management of hazardous materials against Material Safety Data Sheet – Soil and water quality monitoring data – Number of reports if any non-compliance – Number of related complaints	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Plan and (Drinking Water) and Sanitation Plan - Hazardous and toxic materials stored separately - The contractor will identify suitable sites for disposal of hazardous and non- hazardous waste. The selection will be done in consultation with the PMU and the local municipal authorities. <i>Beels, khals</i>, and rivers will not be used for waste dumping. - Fuels and hazardous substances management plan will be implemented. - Design drainage for the batching plant area to direct runoff into a sump/basin for inspection for pollutants prior to discharge - Design settling basins for the discharges from tunnel construction areas - Any discharges to the river or streams should have turbidity of less than 2 mg/l - Regular waste water streams are to be passed through settling basins. - Undertake pH monitoring of site runoff to ensure alkaline runoff is not leaving the site. - Construct a designated, signposted concrete wash down bay that is fully contained and					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- bunded for all excess concrete and concrete wash down, e.g. plastic lined. - Regularly maintain the concrete washout bay, treating any water prior to release to natural systems. - EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-4, ECoP-5, and ECoP-7 will be implemented.					
6.5 Air Quality	-Pollution prevention plan will be implemented. - Construction materials will be stored in designated areas away from sensitive receptors and covered to minimize dust on site from site construction works - Construction vehicles will be sprayed with water when entering and leaving the site, covered if transporting materials, adhere to speed limits, and engines will be turned off when idling. - Water spraying will be carried out to suppress dust emissions where needed - Batching plants, asphalt plants, and crushers will be located 500 m away from residential areas, and will have appropriate dust and emission abatement systems (e.g., wet scrubber) as	Contractor	CSC	– Number of dust-related complaints. – Number of air quality-related complaints, – Compliance with Traffic Management Plan. – Air quality monitoring data – Distance of batching plants and asphalt plants from nearest residential area.	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	appropriate. – Target zero dust related complaints – Target zero air quality related complaints. – EQS compliance will be ensured. – Monitoring of ambient air quality near settlements and sensitive receptors such as schools. – Appropriate actions to be undertaken in case ambient air quality deteriorates beyond EQS limits. – GRM will be established – ECoP-10 will be implemented.					
6.6 Health and Safety	– Compliance with Occupational Health and Safety standards and OHS Plan – Implement fuels and hazardous substances management plan – Use of personal protective equipment (PPE) – Construction sites to be cordoned off to stop unauthorized access – Develop controls and standard operating procedures for the use of fuels and other hazardous substances to prevent spills, accidents, and pilferage – Train and designate personnel for various OHS aspects such as spill control procedures, fire fighting	Contractor	CSC	– Number of respiratory protective devices and other PPEs issues to workers. – Monitoring of compliance with Health and Safety standards (including monthly reporting of accidents). – Number of accidents, incidents and near misses. – Number of trainings provided.	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– Establish firefighting system and fire safety (fire extinguishers) at the construction sites where fire is an hazard – Spill kits and trained personnel are to be made available at the workshops. – Contain all fuel tanks in a fully bunded area with a storage capacity of at least 110 percent of the potential storage volume. – Use auto shut down valves for fuel transfer pipes – Transport of hazardous goods and fuel to be done in closed containers and ISO certified tanks – Provision of respiratory protective devices for workers where needed – Designate agreed routes for traffic (set out in the Traffic Management Plan) – Provision of insurance-backed compensation scheme for major injury or loss of life reflecting settlement sums that are consistent with national/international benchmarks. – Contractor to engage a doctor at the site/camp – Construction sites to have first aid boxes					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Site to have ambulance to transfer injured/sick workers to nearest hospital - WBG's EHS Guidelines to be implemented - ECoP 2 and ECoP-18 will be implemented.					
6.7 Noise and Vibration	-Pollution prevention plan will be implemented. - Construction plant producing sound in excess of 85dB will be fitted with mufflers; - Noise barriers will be provided in areas where significant noise is expected. - EQS compliance will be ensured. - GRM will be established - ECoP-11 will be implemented.	Contractor	CSC	- Record of equipment used on site capable of producing over 85dB and whether equipment has been fitted with mufflers - Number of related community complaints - Noise monitoring data - Number of non-compliances	Throughout construction phase	Included in contractors' costs
6.8 Landscape and Visual Intrusion	- Plantation Plan will be implemented; 350,000 trees will be planted along the priority reach - New planting and landscape restoration as soon as practicable at the end of construction phase - Replanting of flora/vegetation alongside embankment and road - Enhance floral environment by planting fruit trees and ornamental shrubs. - ECoP 8 to be implemented	Contractor	CSC	Compliance with Plantation Plan	Before the completion of the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
6.9 Vegetation loss	- Compensatory tree plantation will be carried out mostly along the embankment and road and also in resettlement sites - A public education program should be designed and implemented to discourage cutting of trees by the construction workers - Avoid dumping material in vegetated areas. - Avoid unnecessary loss of vegetation - ECoP-12 will be implemented.	Contractor	CSC	- Number of trees felled - Number of saplings planted - Survival rate of saplings after one year	Throughout construction phase	Included in contractors' costs
6.10 Fauna / Wildlife	- Awareness raising of workers, employees and general public; - Include information on wildlife protection in all construction related tool-box orientation briefings for new construction staff - A public education program will be designed and implemented to discourage poaching of wildlife - Avoid positioning spoil in areas used by fauna - No hunting or poaching - Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>) - No dumping of effluents or	Contractor	CSC	- Number of reported incidences of hunting or poaching on the Project site / in land ownership. - Number of reports of sighting of key wild species	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	solid waste in water bodies – ECoP-13 and ECoP 14 will be implemented.					
	– Environmental enhancement measures to be implemented	BWDB	ESC	Evidence of implementation of enhancement measures	During construction phase	Included in overall project cost
6.11 Mortality of Fish	– No untreated effluents will be released in water bodies. Care will be observed to minimize sliding of soil and spoil in water bodies. – Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>)	Contractor	CSC	– Number of any non-compliance reports – Number of related grievances	construction phase	Included in contractors' costs
6.12 Damage to infrastructure	Any damaged infrastructure such as roads, bridges and culverts will be repaired	Contractor	CSC	– Number of any non-compliance reports – Number of related grievances	construction phase	Included in contractors' costs
6.13 Damage to PCRs	In case any artifact or site of archeological, cultural, historical, or religious significance are discovered during construction activities, the works will be stopped, and the Archeological Department will be informed.	Contractor	CSC	– Number of any non-compliance reports – Number of reports of any new PCR discovered/reported	construction phase	Included in contractors' costs
6.14 Disturbance of Visual Landscape and Natural Habitats	Proper landscaping will be done and an overall Landscape and Plantation Plan will be implemented that will be worked out in more detail for the area where the project infrastructure is located.	Contractor	CSC	Number of any non-compliance reports	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	Tree planting will be well organized and where possible vegetation and natural habitats will have to be restored or newly created.					
6.15 Social conflict due to the Influx of Workers and In-migrants	- Liaison will be maintained with the communities - Contractors and workforce to follow code of conduct - Respect of local norms and values - Implementation of awareness campaign - Complaints from the local community will be addressed by the Grievance Mechanism that will be developed.	PMU	ESDU	Number of public grievances relating to in-migrants	Construction phase	Included in contractors' costs
6.16 Adverse Effects on Health Situation	- The Public Health Action Plan will be implemented - Raising awareness of the associated risks for the local population. - The awareness campaign will also be aimed at the risk of interaction between the resident population and the construction work force, including the spreading of sexually transmitted diseases such as HIV/AIDS. - The medical health facilities in the project area will be facilitated to deal with such incidences.	PMU and contractor	CSC	Number of patients being treated in the local hospitals	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
6.17 Increased Load on Local Services and Supplies	– The contractors to procure their supplies in a manner not significantly affecting the availability of essential commodities in the area for the residents. – Grievance redress mechanism will be established to address community complaints and grievances.	Contractor	CSC	Number of related public grievances	Construction phase	Included in contractors' costs
6.18 Blockage of local routes	– Local access routes will not be blocked to the extent possible – If blockage of routes or roads is unavoidable, consultations will be carried out with the affected community and alternates will be identified. – Work schedule will be prepared in consultation with the communities to minimize impact of blocked access or routes. – Embankment to have stairs/ramps to facilitate people and their livestock crossing the embankment. – Road will have crossings and tee-junctions at the appropriate places – Road will have zebra crossings	Contractor	CSC	– Number of related community complaints	construction phase	Included in contractors' costs
7. Activity: Construction of Regulators and Fish Passes						
7.1 Soil erosion	– Embankment slopes will be re-vegetated – Vehicular movement near river	Contractor	CSC	Compliance with the Landscaping and Plantation Plan. All replanting to be	Throughout the construction phase and prior to operation	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	banks will be avoided, slope protection measures against soil erosion will be implemented where needed – Areas exposed during construction will be re-vegetated ('greened') immediately – Adopt measures set out in the Landscaping and Plantation Plan – Replanting to occur prior to the commencement of operation, using fast-growing native species; and grasses to assist slope and soil stability. – ECoP-6 will be implemented.			commenced prior to operation.		
7.2 Soil and water contamination	– The contractor will prepare and implement a Pollution Prevention Plan prior to the start of the work. Proper baseline data will be collected. – Construction materials will be stored, used and handled appropriately. – Excavated material disposal methods to include measures to reduce risk of environmental pollution. – Reduce risk of a pollution event through adoption of measures set out in Solid Waste Management Plan and (Drinking Water) and Sanitation Plan – Hazardous and toxic materials	Contractor	CSC	– Monthly auditing of management of hazardous materials against Material Safety Data Sheet – Soil and water quality monitoring data – Number of reports if any non-compliance – Number of related complaints	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	stored separately – The contractor will identify suitable sites for disposal of hazardous and non- hazardous waste. The selection will be done in consultation with the PMU and the local municipal authorities. <i>Beels, khals</i>, and rivers will not be used for waste dumping. – Fuels and hazardous substances management plan will be implemented. – Design drainage for the batching plant area to direct runoff into a sump/basin for inspection for pollutants prior to discharge – Design settling basins for the discharges from tunnel construction areas – Any discharges to the river or streams should have turbidity of less than 2 mg/l – Regular waste water streams are to be passed through settling basins. – Undertake pH monitoring of site runoff to ensure alkaline runoff is not leaving the site. – Construct a designated, signposted concrete wash down bay that is fully contained and bunded for all excess concrete and concrete wash down, e.g. plastic lined.					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Regularly maintain the concrete washout bay, treating any water prior to release to natural systems. - EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-4, ECoP-5, and ECoP-7 will be implemented.					
7.3 Air Quality	-Pollution prevention plan will be implemented. - Construction materials will be stored in designated areas away from sensitive receptors and covered to minimize dust on site from site construction works - Construction vehicles will be sprayed with water when entering and leaving the site, covered if transporting materials, adhere to speed limits, and engines will be turned off when idling. - Water spraying will be carried out to suppress dust emissions where needed - Batching plants, asphalt plants, and crushers will have appropriate dust and emission abatement systems (e.g., wet scrubber) as appropriate. - Target zero dust related complaints - Target zero air quality related complaints.	Contractor	CSC	- Number of dust-related complaints. - Number of air quality-related complaints, - Compliance with Traffic Management Plan. - Air quality monitoring data	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- EQS compliance will be ensured. - Monitoring of ambient air quality near settlements and sensitive receptors such as schools. - Appropriate actions to be undertaken in case ambient air quality deteriorates beyond EQS limits. - ECoP-10 will be implemented.					
7.4 Health and Safety	- Compliance with Occupational Health and Safety standards and OHS Plan - PHAP will be implemented - Implement fuels and hazardous substances management plan - Use of personal protective equipment (PPE) - Construction sites to be cordoned off to stop unauthorized access - Develop controls and standard operating procedures for the use of fuels and other hazardous substances to prevent spills, accidents, and pilferage - Train and designate personnel for various OHS aspects such as spill control procedures, fire fighting - Establish firefighting system and fire safety (fire extinguishers) at the construction sites where fire is a hazard - Spill kits and trained personnel are to be made available at the	Contractor	CSC	- Number of respiratory protective devices and other PPEs issued to workers. - Monitoring of compliance with Health and Safety standards (including monthly reporting of accidents). - Number of accidents, incidents and near misses. - Number of trainings provided. - Number of related complaints - Presence of ERP - Evidence of PHAP implementation	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	workshops. — Contain all fuel tanks in a fully bunded area with a storage capacity of at least 110 percent of the potential storage volume. — Use auto shut down valves for fuel transfer pipes — Transport of hazardous goods and fuel to be done in closed containers and ISO certified tanks — Provision of respiratory protective devices for workers where needed — Designate agreed routes for traffic (set out in the Traffic Management Plan) — Provision of insurance-backed compensation scheme for major injury or loss of life reflecting settlement sums that are consistent with national/international benchmarks. — Contractor to engage a doctor at the site/camp — Construction sites to have first aid boxes — Site to have ambulance to transfer injured/sick workers to nearest hospital — Contractor will prepare an ERP — WBG's EHS Guidelines to be implemented					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– ECoP 2 and ECoP-18 will be implemented.					
7.5 Noise and Vibration	– Pollution prevention plan will be implemented. – Construction plant producing sound in excess of 85dB will be fitted with mufflers; – Noise barriers will be provided in areas where significant noise is expected. – EQS compliance will be ensured. – ECoP-11 will be implemented.	Contractor	CSC	– Record of equipment used on site capable of producing over 85dB and whether equipment has been fitted with mufflers – Number of related community complaints – Noise monitoring data – Number of non-compliances	Throughout construction phase	Included in contractors' costs
7.6 Landscape and Visual Intrusion	– Landscaping and Plantation Plan will be implemented – New planting and landscape restoration as soon as practicable at the end of construction phase – ECoP 8 to be implemented	Contractor	CSC	Compliance with Landscaping and Plantation Plan	Before the completion of the construction phase	Included in contractors' costs
7.7 Vegetation loss	– Compensatory tree plantation will be carried out mostly along the embankment and road and also in resettlement sites – A public education program should be designed and implemented to discourage cutting of trees by the construction workers – Avoid dumping material in vegetated areas. – Avoid unnecessary loss of vegetation – ECoP-12 will be implemented.	Contractor	CSC	– Number of trees felled – Number of saplings planted - Survival rate of saplings after one year	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
7.8 Fauna / Wildlife	- Water regulators and fish pass structures to be installed. - Appropriate O&M procedures for regulators and fish passes to be implemented. - Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>) to the extent possible - Awareness raising of workers, employees and general public; - Include information on wildlife protection in all construction related tool-box orientation briefings for new construction staff - A public education program will be designed and implemented to discourage poaching of wildlife - Avoid positioning spoil in areas used by fauna - No hunting or poaching - No dumping of effluents or solid waste in water bodies - ECoP-13 and ECoP 14 will be implemented.	Contractor	CSC	- Number of reported incidences of hunting or poaching on the Project site / in land ownership. - Number of reports of sighting of key wild species	Throughout construction phase	Included in contractors' costs
7.9 Mortality of Fish	No untreated effluents will be released in water bodies. Care will be observed to minimize sliding of soil and spoil in water bodies.	Contractor	CSC	- Number of any non-compliance reports - Number of related grievances	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>) to the extent possible					
7.10 Damage to infrastructure	Any damaged infrastructure such as roads, bridges and culverts will be repaired	Contractor	CSC	- Number of any non-compliance reports - Number of related grievances	construction phase	Included in contractors' costs
7.11 Damage to PCRs	In case any artifact or site of archeological, cultural, historical, or religious significance are discovered during construction activities, the works will be stopped, and the Archeological Department will be informed.	Contractor	CSC	- Number of any non-compliance reports - Number of reports of any new PCR discovered/reported	construction phase	Included in contractors' costs
7.12 Disturbance of Visual Landscape and Natural Habitats	- Proper landscaping will be done and an overall Landscape and Plantation Plan will be implemented that will be worked out in more detail for the area where the project infrastructure is located. - Tree planting will be well organized and where possible vegetation and natural habitats will have to be restored or newly created.	Contractor	CSC	Number of any non-compliance reports	construction phase	Included in contractors' costs
7.13 Social conflict due to the Influx of Workers and In-migrants	- Liaison will be maintained with the communities - Contractors and workforce to follow code of conduct - Respect of local norms and	PMU	ESDU	Number of public grievances relating to in-migrants	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- values - Implementation of awareness campaign - Complaints from the local community will be addressed by the Grievance Mechanism that will be developed.					
7.14 Adverse Effects on Health Situation	- The Public Health Action Plan will be implemented - Raising awareness of the associated risks for the local population. - The awareness campaign will also be aimed at the risk of interaction between the resident population and the construction work force, including the spreading of sexually transmitted diseases such as HIV/AIDS. - The medical health facilities in the project area will be facilitated to deal with such incidences.	PMU and contractor	CSC	Number of patients being treated in the local hospitals	Construction phase	Included in contractors' costs
7.15 Increased Load on Local Services and Supplies	- The contractors to procure their supplies in a manner not significantly affecting the availability of essential commodities in the area for the residents. - Grievance redress mechanism will be established to address community complaints and grievances.	Contractor	CSC	Number of related public grievances	Construction phase	Included in contractors' costs
7.16 Blockage of	Local access routes will not be	Contractor	CSC	– Number of related	construction	Included in

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
local routes / traffic congestion	- blocked to the extent possible - Boat/launch jetties will not be blocked to the extent possible - If blockage of routes, roads, or boat jetties is unavoidable, consultations will be carried out with the affected community and alternates will be identified. - Work schedule will be prepared in consultation with the communities to minimize impact of blocked access or routes. - The contractors will be required to prepare and implement a traffic management plan.			community complaints – Presence of traffic management plan – Evidence of its implementation.	phase	contractors' costs
8. Activity: Material Borrowing						
8.1 Impacts on aquatic habitat	- Borrow area management plan will be implemented. - Sand extraction will be carried out leaving stretches of the river bank undisturbed, only small quantity of sand will be extracted from any single location - The contractor will obtain clearance from the CSC before sand extraction can be carried out at any particular location. The CSC will issue this clearance after surveying the area and ensuring that no critical habitat exists at such location - Sensitive habitats to be avoided for sand extraction	Contractor	CSC	Number of any non-compliance reports	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- GRM will be put in place. - Ecological monitoring to be carried out to determine any long lasting impact of sand extraction.	Consultants	ESDU	Monitoring reports	During construction	Included in ESMP cost
8.2 Soil erosion	- Borrow pits/areas to be restored to the extent possible/ necessary - Road edge buffers will be re-planted - Replanting to be carried out after completing the quarrying, using fast-growing native species; and grasses to assist slope and soil stability. - ECoP-6 will be implemented.	Contractor	CSC	Number of any non-compliance reports	construction phase	Included in contractors' costs
8.3 Soil and water contamination	- Small quantity of sand extraction will be carried from a single location to minimize increase in water turbidity - Pollution prevention plan and waste disposal plan will be implemented. - Any discharges to the river or streams should have turbidity of less than 2 mg/l - Regular waste water streams are to be passed through settling basins. - Undertake pH monitoring of site runoff to ensure alkaline runoff is not leaving the site. - EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-4, ECoP-	Contractor	CSC	- Monthly auditing of management of hazardous materials against Material Safety Data Sheet - Soil and water quality monitoring data - Number of reports if any non-compliance - Number of related complaints	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	5, and ECoP-7 will be implemented.					
8.4 Air Quality	– Pollution prevention plan will be implemented. – Exhaust from construction vehicles, boats, and equipment will comply with EQS – Construction materials will be stored in designated areas away from sensitive receptors and covered to minimize dust on site from site construction works – Water spraying will be carried out to suppress dust emissions where needed – Construction vehicles will be sprayed with water when entering and leaving the site, covered if transporting materials, adhere to speed limits, and engines will be turned off when idling. – Target zero dust related complaints – Target zero air quality related complaints. – ECoP-10 will be implemented.	Contractor	CSC	– Number of dust-related complaints. – Number of air quality-related complaints, – Air quality monitoring data – Compliance with Traffic Management Plan.	construction phase	Included in contractors' costs
8.5 Health and Safety	– Construction workers on boats to have life jackets – Compliance with Occupational Health and Safety standards and OHS Plan – Implement Fuels and hazardous	Contractor	CSC	– Number of respiratory protective devices and other PPEs issues to workers. – Monitoring of compliance with Health and Safety standards (including	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- substances management plan – Develop controls and standard operating procedures for the use of fuels and other hazardous substances to prevent spills, accidents – Train and designate personnel for various OHS aspects such as spill control procedures, fire fighting – Establish firefighting system and fire safety (fire extinguishers) at the construction sites where fire is an hazard – Transport of hazardous goods and fuel to be done in closed containers and ISO certified tanks – Provision of respiratory protective devices for workers where needed – Designate agreed routes for traffic (set out in the Traffic Management Plan) – Boats to have first aid boxes – WBG's EHS Guidelines to be implemented – ECoP 2, ECoP 16, and ECoP-18 will be implemented.			- monthly reporting of accidents). – Number of accidents, incidents and near misses. – Number of trainings provided.		
8.6 Noise and Vibration	– Pollution prevention plan will be implemented. – Construction plants and vehicles producing sound in excess of 85dB will be fitted with mufflers;	Contractor	CSC	– Number of record of equipment used on site capable of producing over 85dB and whether equipment has been fitted with mufflers	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	– EQS compliance will be ensured. – ECoP-11 will be implemented.			– Number of related community complaints – Noise monitoring data		
8.7 Damage to infrastructure	Any damaged infrastructure such as boat jetties will be repaired	Contractor	CSC	Number of any non-compliance reports	construction phase	Included in contractors' costs
Impacts on cultivation fields	No borrowing will be carried out from the cultivation fields.	Contractor	CSC	Any non-compliances	construction phase	Included in contractors' costs
9. Activity: Construction of Resettlement Sites						
9.1 Changes in Land Use, loss of agriculture	• Sites having minimum displacement requirements will be selected • Sites with minimum impacts on agriculture activities and cultivated land will be selected • Sites will be located at a safe distance from sensitive habitats • Community consultation will be carried out to finalize the sites • RAP will be implemented. • GRM will be put in place.	ESDU	Independent monitors	– Documentary evidence of RAP implementation – Percentage of affectees that have received full payment. – Number of related grievances	Before construction	Included in overall project cost
9.2 Changes to land form and topography	– Changes to the land form and topography will only occur in designated areas to accommodate defined project features. – Excavation of material will be kept to a minimum. – Implement ECoP 8.	Contractor	CSC	– Volume of spoil extracted (monitor against predictions). – All excavated materials to be disposed of in designated sites. – Number of non-compliances observed/reported	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
9.3 Soil erosion	– Slopes will be re-vegetated – Areas exposed during construction will be re-vegetated ('greened') immediately – Adopt measures set out in the Landscaping and Plantation Plan – Replanting to occur prior to the commencement of operation, using fast-growing native species; and grasses to assist slope and soil stability. – ECoP-6 will be implemented.	Contractor	CSC	Compliance with the Landscaping and Plantation Plan. All replanting to be commenced prior to operation.	Throughout the construction phase and prior to operation	Included in contractors' costs
9.4 Soil and water contamination	– The contractor will prepare and implement a Pollution Prevention Plan prior to the start of the work. Proper baseline data will be collected. – Construction materials will be stored, used and handled appropriately. – Excavated material disposal methods to include measures to reduce risk of environmental pollution. – Reduce risk of a pollution event through adoption of measures set out in Solid Waste Management Plan and (Drinking Water) and Sanitation Plan – Hazardous and toxic materials stored separately – The contractor will identify	Contractor	CSC	– Monthly auditing of management of hazardous materials against Material Safety Data Sheet – Soil and water quality monitoring data – Number of reports if any non-compliance – Number of related complaints	Throughout the construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	suitable sites for disposal of hazardous and non- hazardous waste. The selection will be done in consultation with the PMU and the local municipal authorities. <i>Beels, khals</i>, and rivers will not be used for waste dumping. — Fuels and hazardous substances management plan will be implemented. — Design drainage for the batching plant area to direct runoff into a sump/basin for inspection for pollutants prior to discharge — Design settling basins for the discharges from tunnel construction areas — Any discharges to the river or streams should have turbidity of less than 2 mg/l — Regular waste water streams are to be passed through settling basins. — Undertake pH monitoring of site runoff to ensure alkaline runoff is not leaving the site. — Construct a designated, signposted concrete wash down bay that is fully contained and bunded for all excess concrete and concrete wash down, e.g. — — Plastic lined.					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Regularly maintain the concrete - Washout bay, treating any water prior to release to natural systems. - EQS compliance will be ensured. - ECoP-1, ECoP-2, ECoP-4, ECoP-5, and ECoP-7 will be implemented.					
9.5 Air Quality	-Pollution prevention plan will be implemented. - Construction materials will be stored in designated areas away from sensitive receptors and covered to minimize dust on site from site construction works - Construction vehicles will be sprayed with water when entering and leaving the site, covered if transporting materials, adhere to speed limits, and engines will be turned off when idling. - Water spraying will be carried out to suppress dust emissions where needed - Batching plants, asphalt plants, and crushers will have appropriate dust and emission abatement systems (e.g., wet scrubber) as appropriate. - Target zero dust related complaints - Target zero air quality related complaints.	Contractor	CSC	- Number of dust-related complaints. - Number of air quality-related complaints, - Compliance with Traffic Management Plan. - Air quality monitoring data	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- EQS compliance will be ensured. - Monitoring of ambient air quality - Near settlements and sensitive receptors such as schools. - Appropriate actions to be undertaken in case ambient air quality deteriorates beyond EQS limits. - ECoP-10 will be implemented.					
9.6 Health and Safety	- Compliance with Occupational Health and Safety standards and OHS Plan - Implement fuels and hazardous substances management plan - Use of personal protective equipment (PPE) - Construction sites to be cordoned off to stop unauthorized access - Develop controls and standard operating procedures for the use of fuels and other hazardous substances to prevent spills, accidents, and pilferage - Train and designate personnel for various OHS aspects such as spill control procedures, fire fighting - Establish firefighting system and fire safety (fire extinguishers) at the construction sites where fire is an hazard - Spill kits and trained personnel are to be made available at the	Contractor	CSC	- Number of respiratory protective devices and other PPEs issues to workers. - Monitoring of compliance with Health and Safety standards (including monthly reporting of accidents). - Number of accidents, incidents and near misses. - Number of trainings provided.	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	workshops. — Contain all fuel tanks in a fully bunded area with a storage capacity of at least 110 percent of the potential storage volume. — Use auto shut down valves for fuel transfer pipes — Transport of hazardous goods and fuel to be done in closed containers and ISO certified tanks — Provision of respiratory protective devices for workers where needed — Designate agreed routes for traffic (set out in the Traffic Management Plan) — Provision of insurance-backed compensation scheme for major injury or loss of life reflecting settlement sums that are consistent with national/international benchmarks. — Contractor to engage a doctor at the site/camp — Construction sites to have first aid boxes — Site to have ambulance to transfer injured/sick workers to nearest hospital — WBG's EHS Guidelines to be implemented — ECoP 2 and ECoP-18 will be					

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	implemented.					
9.7 Noise and Vibration	-Pollution prevention plan will be implemented. - Construction plant producing sound in excess of 85dB will be fitted with mufflers; - Noise barriers will be provided in areas where significant noise is expected. - EQS compliance will be ensured. - ECoP-11 will be implemented.	Contractor	CSC	- Record of equipment used on site capable of producing over 85dB and whether equipment has been fitted with mufflers - Number of related community complaints - Noise monitoring data - Number of non-compliances	Throughout construction phase	Included in contractors' costs
9.8 Landscape and Visual Intrusion	- Landscaping and Plantation Plan will be implemented - New planting and landscape restoration as soon as practicable at the end of construction phase - Replanting of flora/vegetation alongside embankment and road - Enhance floral environment by planting fruit trees and ornamental shrubs. - ECoP 8 to be implemented	Contractor	CSC	Compliance with Landscaping and Plantation Plan	Before the completion of the construction phase	Included in contractors' costs
9.9 Vegetation loss	- Compensatory tree plantation will be carried out mostly along the embankment and road and also in resettlement sites - A public education program should be designed and implemented to discourage cutting of trees by the construction workers - Avoid dumping material in	Contractor	CSC	- Number of trees felled - Number of saplings planted - Survival rate of saplings after one year	Throughout construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	vegetated areas. – Avoid unnecessary loss of vegetation – ECoP-12 will be implemented.					
9.10 Fauna / Wildlife	– Awareness raising of workers, employees and general public; – Include information on wildlife protection in all construction related tool-box orientation briefings for new construction staff – A public education program will be designed and implemented to discourage poaching of wildlife – Avoid positioning spoil in areas used by fauna – No hunting or poaching – Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>) – No dumping of effluents or solid waste in water bodies – ECoP-13 and ECoP 14 will be implemented.	Contractor	CSC	– Number of reported incidences of hunting or poaching on the Project site / in land ownership. – Number of reports of sighting of key wild species	Throughout construction phase	Included in contractors' costs
	– Environmental enhancement measures to be implemented	BWDB	ESC	Evidence of implementation of enhancement measures	During construction phase	Included in overall project cost
9.11 Mortality of Fish	– No untreated effluents will be released in water bodies. Care will be observed to minimize	Contractor	CSC	– Number of any non-compliance reports – Number of related	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	sliding of soil and spoil in water bodies. – Keeping away from sensitive habitats such as water channels (<i>khals</i>) and water ponds (<i>beels</i>)			grievances		
9.12 Damage to infrastructure	Any damaged infrastructure such as roads, bridges and culverts will be repaired	Contractor	CSC	– Number of any non-compliance reports – Number of related grievances	construction phase	Included in contractors' costs
9.13 Damage to PCRs	– In case any artifact or site of archeological, cultural, historical, or religious significance are discovered during construction activities, the works will be stopped, and the Archeological Department will be informed.	Contractor	CSC	– Number of any non-compliance reports – Number of reports of any new PCR discovered/reported	construction phase	Included in contractors' costs
9.14 Disturbance of Visual Landscape and Natural Habitats	– Proper landscaping will be done and an overall Landscape and Plantation Plan will be implemented that will be worked out in more detail for the area where the project infrastructure is located. – Tree planting will be well organized and where possible vegetation and natural habitats will have to be restored or newly created.	Contractor	CSC	Number of any non-compliance reports	construction phase	Included in contractors' costs
9.15 Social conflict due to the Influx of Workers and In-migrants	– Liaison will be maintained with the communities – Contractors and workforce to follow code of conduct	PMU	ESDU	Number of public grievances relating to in-migrants	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- Respect of local norms and values - Implementation of awareness campaign - Complaints from the local community will be addressed by the Grievance Mechanism that will be developed.					
9.16 Adverse Effects on Health Situation	- The Public Health Action Plan will be implemented - Raising awareness of the associated risks for the local population. - The awareness campaign will also be aimed at the risk of interaction between the resident population and the construction work force, including the spreading of sexually transmitted diseases such as HIV/AIDS. - The medical health facilities in the project area will be facilitated to deal with such incidences.	PMU and contractor	CSC	Number of patients being treated in the local hospitals	Construction phase	Included in contractors' costs
9.17 Increased Load on Local Services and Supplies	- The contractors to procure their supplies in a manner not significantly affecting the availability of essential commodities in the area for the residents. - Grievance redress mechanism will be established to address community complaints and grievances.	Contractor	CSC	Number of related public grievances	Construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
9.18 Blockage of local routes	- Local access routes will not be blocked to the extent possible - Boat/launch jetties will not be blocked to the extent possible - If blockage of routes, roads, or boat jetties is unavoidable, consultations will be carried out with the affected community and alternates will be identified. - Work schedule will be prepared in consultation with the communities to minimize impact of blocked access or routes.	Contractor	CSC	– Number of related community complaints	construction phase	Included in contractors' costs
10. Activity: Waste management						
10.1 Soil and water contamination	- Contractors will implement the Waste Management Plan. - Appropriate hazardous, industrial and domestic waste disposal facilities must be established - For the domestic sewage, appropriate treatment and disposal system (e.g., septic tanks and soaking pits) will be constructed having adequate capacity - Waste oils will be collected in drums and sold to the recycling contractors. - The inert recyclable waste from the site (such as cardboard, drums, and broken/used parts) will be sold to recycling contractors.	Contractor	CSC	– Monthly auditing of management of hazardous materials against Material Safety Data Sheet – Soil and water quality monitoring data – Reports if any non-compliance – Number of related complaints	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	- The hazardous waste will be kept separate and handled according to the nature of the waste. - Domestic solid waste will be disposed off in a manner that does not cause soil contamination. - Awareness raising for minimizing use of non-biodegradable substances - Regular maintenance of waste management facilities will be undertaken - No waste dumping/release will be carried out in environmental sensitive areas including <i>beels</i>, <i>khals</i>, and rivers - Implement ECoP 1					
10.2 Odor	- Waste disposal sites will be located away from the communities - Regular maintenance of waste management facilities will be undertaken	Contractor	CSC	Number of related complaints	construction phase	Included in contractors' costs
11. Activity: Sire Restoration						
11.1 Site restoration	- Demolition of temporary structures - Removal of all debris, excess construction material, scraps, spoils, other wastes - Landscaping - Restoration of sites for camps	Contractor	CSC	- Photographic record - Clearance from CSC	construction phase	Included in contractors' costs

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
	and office buildings					

Table 11.5: Mitigation and Compliance Monitoring Plan – O&M Phase

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
Changes in river morphology	– Monitoring program to study changes in river morphology to be started	BWDB	BWDB	– Evidence of program initiation – Monitoring reports	During construction and O&M phases	Included in overall project cost
Loss of ecological connectivity	– Water regulators and fish passes to be operated in accordance with standard operating procedures – Operation and maintenance committees will be established for each regulator to appropriately operate and maintain these structures. These committees will be responsible for scheduled opening and closing of regulator gates, and removal of silt deposits in the khals. – Regular monitoring to be carried out to determine appropriate operation of structures	BWDB	BWDB	– Evidence of availability of procedures – Evidence of formation of committees – Monitoring results	During O&M phase	Included in overall O&M cost
Drainage congestion and water logging	– Water regulators and fish passes to be operated in accordance with standard operating procedures – Regular monitoring to be carried out to determine appropriate operation of structures	BWDB	BWDB	– Evidence of availability of procedures – Monitoring results	During O&M phase	Included in overall O&M cost

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
Solid waste management	- HSE Plan to be prepared; Plan to include waste management - Regular monitoring to be carried out to verify plan implementation	BWDB	BWDB	- Evidence of availability of HSE Plan - Monitoring results	During O&M phase	Included in overall O&M cost
Air pollution from traffic	- Road side plantation to be carried out and maintained - The road surface will be maintained regularly for smooth traffic flow and reduction of vehicular emissions	BWDB	BWDB	Evidence of plantation	During construction and O&M phases	Included in overall O&M cost
Noise	- Noise barriers to be installed where needed - GRM to be put in place	BWDB	BWDB	- Evidence of presence of barriers - Number of related complaints	During O&M	To be included O&M cost
Water pollution	- Storm water drainage to be maintained in good working condition - HSE Plan to be implemented	BWDB	BWDB	- Evidence of presence of drains - Number of related complaints	During O&M	To be included O&M cost
Embankment breaches	- Regular inspection of embankment - ERP to be prepared - Regular drills and trainings	BWDB	BWDB	- Evidence of presence of inspection records - Evidence of ERP - Training/drills record	During O&M	To be included O&M cost
Changes in agricultural pattern	- Implementation of Social Development Plan (Plan to include capacity building of farmers) - Linkage with existing IPM programs	BWDB	BWDB	- Evidence of implementation of SDP - Training record - Evidence of linkage with IPM programs	During O&M	To be included O&M cost
	Prepare and implement an integrated pest management plan (IPMP)			- Presence of IPMP - Evidence of implementation of IPMP	Plan to be prepared during construction	Included in project cost

Environmental Impact/Issue	Actions	Responsibility		Key Performance Indicator	Timing	Cost Allocation
		Execution	Monitoring			
Community health and safety	– HSE Plan to be implemented	BWDB	BWDB	– Evidence of implementation of SDP	During O&M phase	To be included O&M cost
	– Zebra crossing to be maintained			– Evidence of presence of HSE Plan		
	– Pedestrian walk bridges and ramps to be maintained			– Availability of zebra crossings, foot bridges and ramps.		
	– Community awareness under SDP			– Number of complaints associated with health and safety.		
	– GRM will be established					

11.5. Effects Monitoring during Construction

Effects monitoring is a very important aspect of environmental management to safeguard the protection of environment. The effects monitoring plan is presented in **Table 11.6**. The monitoring will comprise surveillance to check whether the contractor is meeting the provisions of the contract during construction and operation of the Project including the responsible agencies for implementation and supervision.

Table 11.6: Effects Monitoring Plan

Parameter / Activity	Location	Means of Monitoring	Frequency	Responsible Agency	
				Implemented By	Supervised By
Sand extraction	River bank	Visual inspection to ensure the depth of excavation from the river bed is limited to 3m.	Weekly	Contractor	CSC
	River bank	Visual inspection to ensure the extraction location is more than 20 m from the river bank (boats and measuring instruments would be needed)	Weekly	Contractor	CSC
	River bank	Visual inspection to ensure that sand extraction is not carried out in single, contiguous stretches	Weekly	Contractor	CSC
Pb, Cd, Cr, Cu, Zn, Mn, As, Se Hg, and oil/grease	Riverbed within the project boundary	Laboratory analysis of material for screening for metals and oil/grease	Before sand extraction	Contractor through a nationally recognized laboratory	CSC
Soil Pollution	Embankment	Visual inspection that filling is through several compartments	Beginning of earth filling works	Contractor	CSC
	Embankment	Ensure no contaminated effluent is leaving from the filling area to the nearby agricultural lands	Weekly	Contractor	CSC
	Material storage sites	Visual inspection.	Monthly	Contractor	CSC
Erosion	Side slopes	Visual inspection of erosion prevention measures and occurrence of erosion	At the end of filling activity	Contractor	CSC
Hydrocarbon and chemical storage	Construction camps	Visual Inspection of storage facilities	Monthly	Contractor	CSC
Damage to local roads	Approach Roads to the construction	Visual inspection to ensure local roads are	Monthly	Contractor	CSC

Parameter / Activity	Location	Means of Monitoring	Frequency	Responsible Agency	
				Implemented By	Supervised By
	sites	not damaged			
Traffic Safety	Haul Roads	Visual inspection to see whether proper traffic signs are placed and flag-men for traffic management are engaged	Monthly	Contractor	CSC
Air Quality (dust, smoke)	Construction sites	Visual inspection to ensure good standard equipment is in use and dust suppression measures (eg, spraying of waters) are in place.	Daily	Contractor	CSC
	Asphalt Plant	Visual inspection to ensure asphalt plant is located >500 m from residential areas	Monthly	Contractor	CSC
	Material storage sites	Visual inspection to ensure dust suppression work plan is being implemented	Monthly	Contractor	CSC
	Sensitive receptors along construction corridor	Continuous monitoring with the help of appropriate instruments and analyzers	Quarterly during the construction phase	Contractor	CSC
Noise	Construction sites	Physical inspection to ensure good standard equipment are in use; Noise measurement using noise meter	Weekly	Contractor	CSC
	Construction sites	Visual inspection to ensure ear plugs are in use by the construction workers	Weekly	Contractor	CSC
		Ensure work restriction between 21:00-06:00 close to the sensitive locations	Weekly	Contractor	CSC
Water quality (As, Mn, Fe, and coliforms)	Locations of tube-well installation	Depth of tube well should be more than 300m. Test water for arsenic, iron and manganese before installing of casing. If the quality is found not suitable further deepening will be done.	During drilling of wells	Contractor through a nationally recognized laboratory	CSC External Monitor
	Near camp sites and other sensitive locations	Laboratory analysis	Monthly during construction phase	Contractor through a nationally recognized laboratory	CSC

Parameter / Activity	Location	Means of Monitoring	Frequency	Responsible Agency	
				Implemented By	Supervised By
	along the construction corridor				
Plantation	Embankment/road	Visual inspection to ensure plantations in green areas and other designated sites.	Monthly	Contractor	CSC
Waste Management	Construction camps	Visual inspection that solid waste is disposed at designated site	Monthly	Contractor	CSC
Drinking water and sanitation	Camps, offices	Ensure the construction workers are provided with safe water and sanitation facilities in the site	Weekly	Contractor	CSC
Flora and Fauna	Sensitive habitats in Project area (Tables 6.7, 6.16, and 6.17)	Survey and comparison with baseline environment	Six-monthly	Contractor through nationally recognized institute	CSC, M&E Consultant, BWDB
Fish migration	Khals, beels and river (Tables 6.7, 6.16, and 6.17; Annex F)	Survey and comparison with baseline environment	Six-monthly	Contractor through nationally recognized institute	CSC, M&E Consultant, BWDB
Cultural and archeological Sites	At all work sites	Visual observation for chance finds	Daily	Contractor	CSC, M&E Consultant, BWDB
Restoration of Work Sites	All Work Sites	Visual Inspection	After completion of all works	Contractor	CSC, M&E Consultant, BWDB
Safety of workers Monitoring and reporting accidents	At work sites	Usage of Personal Protective equipment	Monthly	Contractor	CSC, M&E Consultant, BWDB
During Operation and Maintenance					
Surface Water Quality (TDS, Turbidity, pH, DO, BOD, COD etc)	At the baseline monitoring sites	Sampling and analysis of surface water quality	Six-monthly	BWDB through a nationally recognized laboratory	BWDB
Pesticide residue in soil and water	Cultivation fields, khals and beels	Laboratory analysis	Six-monthly	BWDB through a nationally recognized	BWDB

Parameter / Activity	Location	Means of Monitoring	Frequency	Responsible Agency	
				Implemented By	Supervised By
				laboratory	
Air Quality (Dust PM ₁₀ , PM _{2.5})	At the baseline monitoring sites	24 hours Air quality monitoring	Yearly	BWDB through a nationally recognized laboratory	BWDB
Flora and Fauna specially fisheries	Sensitive habitats in Project area (Tables 6.7, 6.16, and 6.17 and Annex F)	Detail species assessment and compare with baseline	Yearly	BWDB through a nationally recognized institution	BWDB
Agriculture	In the project area	Compare the production with the baseline	Yearly	BWDB through a nationally recognized institution	BWDB
Operation of regulators and fish passes	In the project area	Visual inspection and public feedback	Yearly	BWDB	BWDB

11.6. Performance Indicators

For evaluating the performance of the environmental management and monitoring plan, performance indicators are identified to for efficient and timely implementation of measures/actions proposed in ESMP. The indicators are defined both for implementation phase and for operation phase. CSC will be responsible for compiling the information on these indicators and report to BWDB.

Separate performance indicators for each environmental issue have been specified in **Table 11.4** and **11.5** earlier. To measure the overall environmental performance of the project, an additional list of performance indicators is given below.

- Number of inspections carried out by CSC per month
- Number of non-compliances observed by CSC or ESDU.
- Availability of environmental specialists in ESDU.
- Availability of environmental specialists in CSC.
- Availability of environmental specialists with contractors.
- Timely reporting of documents (as defined in ESMP and monitoring plan)
- Number of trainings imparted to stakeholders/other capacity building initiatives
- Timely disbursement of compensation/ timely resettlement of project affectees
- Timely implementation of resettlement schedule.

- Number of grievances received.
- Number of grievances resolved.
- Number of construction related accidents.

11.7. Grievance Redress Mechanism ³⁵

The project will establish a grievance redress mechanism (GRM) for addressing grievances and complaints received from the project-affected persons. The fundamental objective of GRM will be to resolve any project-related grievances locally in consultation with the aggrieved party to facilitate smooth implementation of the social and environmental action plans. Another important objective is to democratize the development process at the local level and to establish accountability to the affected people. The procedures will however not pre-empt a person's right to go to the courts of law.

Under the GRM, two grievance redress committees (GRCs) will be formed: local grievance redress committee (LGRC); and project grievance redress committee (PGRC). Most of the grievances would be resolved at LGRC while a few might be forwarded to PGRC. These GRCs are described below.

11.7.1. Local Grievance Redress Committee

The following LGRC composition has been proposed for the project:

- Executive Engineer – RBIP, BWDB: Convener
- Representative of an international non-governmental organization: Member, Secretary
- Chairman – concerned Union *Parishad* (UP): Member
- Female member of concerned ward of the UP: Member
- Representative of Women affected persons (APs): Member

LGRC meetings will be held in the convener's office in the project area or other location(s) as agreed by the Committee members. If needed, LGRC members may undertake field visits to verify and review the issues, including titles/shares, reason for any delay in payments, or any concern regarding social or environmental impacts of the project.

11.7.2. Project Grievance Redress Committee

The grievances that are not resolved at the LGRC will be forwarded to the PGRC. The PGRC will be empowered to take a decision, which would be binding on BWDB but it would require approval of the Project Director for implementation of the decision. The Project Director will head the PGRC. The composition of the PGRC will be as follows:

- Project Director: Chair Person
- Head of ESDU: Member, Secretary (Team Leader of INGO will assist the Secretary in grievance redress mechanism).
- Representative of Civil Society: Member (nominated by Project Director with the help of INGO).

³⁵ Further details on GRM are available in RAP.

The Secretary of PGRC with the help of INGO Team Leader will provide necessary knowledge and information regarding relevant project policies and agreements with development partner. The provision of PGRC will further establish fairness and transparency in the resolution of grievances of the project-affected persons. In case of technical nature of environmental issues, or any legal matters, Team Leader of INGO or environmental and social development specialists of CSC will advise the PGRC. In specific cases, external legal and or technical advice may also be sought, if required.

11.8. Capacity Building

Capacity building for effective implementation of the environmental and social safeguard requirements is a key element of the ESMP. Capacity building for environmental and social safeguard management will need to be carried out at all tiers of the project, including BWDB, ESDU, CSC, and contractors. At the construction site, CSC will take the lead in implementing the capacity building plan, though the contractors will also be responsible to conduct trainings for their own staff and workers. The various aspects that are covered under the capacity building will include general environmental and social awareness, key environmental and social sensitivities of the area, key environmental and social impacts of the project, ESMP requirements, OHS aspects, and waste disposal. **Table 11.7** provides a summary of various aspects of the environmental and social trainings to be conducted at the construction site. ESDU may revise the plan during the Project implementation as required.

During the O&M phase of the Project, these trainings will continue to be conducted by BWDB staff for all relevant O&M personnel and community.

Table 11.7: Environmental and Social Trainings

Contents	Participants	Responsibility	Schedule
General environmental and socioeconomic awareness; Environmental and social sensitivity of the project area; Key findings of the EIA; Mitigation measures; ESMP; Social and cultural values of the area.	Selected staff of BWDB, CSC, and contractors	CSC	Prior to the start of the Project activities. (To be repeated as needed.)
General environmental and socioeconomic awareness; Environmental and social sensitivity of the project area; Mitigation measures; Community issues; Awareness of transmissible diseases Social and cultural values.	PMU; CSC; selected contractors' crew	CSC	Prior to the start of the field activities. (To be repeated as needed.)
ESMP; Waste disposal; OHS	Construction crew	Contractors	Prior to the start of the construction activities.

Contents	Participants	Responsibility	Schedule
			(To be repeated as needed.)
Road/waterway safety; Defensive driving/sailing; Waste disposal; Cultural values and social sensitivity.	Drivers; boat/launch crew	Contractors	Before and during the field operations. (To be repeated as needed.)
Camp operation; Waste disposal; OHS Natural resource conservation; Housekeeping.	Camp staff	Contractors	Before and during the field operations. (To be repeated as needed.)
Restoration requirements; Waste disposal.	Restoration teams	Contractors	Before the start of the restoration activities.

11.9. Documentation

The ESDU with assistance from CSC and contractors will produce the following environmental reporting documentation:

- *Environmental Monitoring Reports:* The environmental monitoring reports will include environmental mitigation measures undertaken, environmental monitoring activities undertaken, details of monitoring data collected, analysis of monitoring results particularly the non-compliances, recommended mitigation and corrective measures, environmental training conducted, and environmental regulatory violations observed. The environmental monitoring reports will be submitted quarterly during the construction period and annually for three years after completion of construction.
- *Project Completion Environmental Monitoring Report:* One year after completion of construction, the ESDU will submit a Project Completion Environmental Monitoring Report which will summarize the overall environmental impacts from the Project to all the co-financiers.

BWDB will engage External Monitors during construction period to measure the effectiveness and outcome/impact of ESMP. The External monitors will submit the quarterly reports throughout the contract time, impact evaluation report at the end of each year and finally a completion Report at the end of contract period.

11.10. EMP Implementation Cost

The estimated costs for the environmental management and monitoring activities are set out in **Table 11.8** below. This cost has been included in the overall project cost.

Table 11.8: Cost Estimates for Environmental Management and Monitoring

Project Component	S. No	Description	Amount, USD
A. Rehabilitation/Civil Works	1	Contractors Budget (for development of management plans, staff, training, etc.)	1.00
	2	Air, noise and water quality monitoring during construction (quarterly for 5 years)	0.50
	3	Tree plantation development and maintenance along embankments	1.00
B. Implementation of EMP	4	Baseline Ecological Studies, development of conservation plans and biodiversity monitoring during construction and operation (5 years), training to workers, monitoring of sand extraction sites	2.00
	5	Implementation of conservation plans (e.g. fish sanctuaries in koles, bird sanctuaries in chars, dolphin sanctuary in river); eco tourism development	3.00
	6	O&M of fish passes (an agency to form and train the management communities, operation and maintenance, and monitoring equipment such as under water) cameras	1.00
	7	Fisheries development in the floodplains (improving connectivity of khals, artificial stocking of fingerlings, capacity building in sustainable harvesting, awareness raising, development of market facilities)	2.00
	8	Community Plantation development and maintenance (in resettlement sites, beels, riparian, etc.)	1.00
	9	Integrated pest management	1.00
	10	Resettlement sites management (O&M costs for sanitation and waste management, staff, etc.)	0.50
	11	Additional studies and Support	1.00
	12	Contingencies	0.50
C. CSC and M&E Consultants	13	CSC Environmental Staff	1.50
	14	Independent Environment Consultants/M&E	0.50
D. PMU and Capacity Building	15	PMU Environmental staff	1.00
	16	Capacity building and institutional strengthening	0.50
		TOTAL	18.00

12. Stakeholder Consultations

This Chapter presents the objectives, process, and outcome of the consultations carried out with the institutional as well as grass root stakeholders (ie, local communities) of the RBIP. Also discussed in this Chapter are the disclosure requirements for the present EIA.

12.1. Consultation Objectives

RBIP is a large scale project impacting directly on the lives of the people as well as communities living in and around the existing and proposed alignment. This project has multiple dimensions encumbering agriculture, fishery, livelihood, physical environment and others. It aims at protecting lives and properties in addition to consolidating livelihood opportunities and general uplift of the area. It also involves a large amount of physical activities such as earthwork, construction and others – activities that may potentially have negative impacts on environment and people, as discussed in the preceding chapters. The consultations have been conducted during the present EIA with the cross section of communities, governmental officials, local body members and the primary stakeholders, to solicit their opinions and views about the project and its potential impacts. The consultations have enquired into the area's important environmental features such as agricultural practices, flooding, loss of crops, fish breeding and its movement, use of water, flora and fauna, and other aspects relevant to the proposed project and its intended outcomes and objectives. The consultations have also reflected on the past relevant experience such as the functioning of existing fish migration route. During the consultations, communities' suggestions and concerns have also been noted apart from opinions on the proposed venture and the key associated activities.

The key objectives of the consultations carried out for the RBIP include the following:

- Inform the relevant stakeholders about the project, its key objectives, and its salient features
- Share with the stakeholders the nature, objective and extent of the present EIA study (ie, sharing the terms of reference of the present EIA with the stakeholders)
- Promote participation of the local people, local level government stakeholders, elected representatives and other community representatives to create opportunity to play a role and express their views
- Analyze household and community level issues and draw early attention for mitigations and/or resolution of the same issues
- Acquire suggestions of the community for mitigating any anticipated adverse environmental and social impacts and expected benefits of the Project;
- Obtain the views of various categories of vulnerable groups, discuss project impacts and benefits on these groups, and ascertain their expectations regarding project benefits
- Develop strategies to minimize potential social and environmental adverse impacts in conjunction with government stakeholders
- Promote pro-people and community-based environmental management and mitigation, resettlement, and development strategies

- Prepare the community with confidence and capacity to deal with displacement, environmental and resettlement management.

12.2. Approach and Methodology

Public consultation is a qualitative exercise with an empirical approach. It enables raising issues with the direct and indirect stakeholders and through a process of consultation and discussion registers their views and opinions. Focus Group Discussions (FGDs), Key Informant Interviews (KII), and Personal Interviews are the main tools of data collection that have been employed for the present consultations. To gather community perspective more rigorously the techniques like participatory mapping or seasonality review were also undertaken.

The respondents were selected purposively and carefully however, it was ensured that the relevant perspective is properly captured. Thus thematic aspects (e.g., agriculture, ecology or fish) were given importance in the selection of the respondents. Catchment area of different facilities such as regulator was taken into consideration to delimit the area to choose respondents. With the help of the checklists and obtaining prior consent the FGDs were conducted in a systematic manner with an attention of gender balance in the composition of the respondents. The consultation sessions were open, interactive, and were properly recorded.

The respondents who shared their views and opinions included the following: general residents of the area, squatters, tenants, river erosion victims, farmers, fishermen, vendors, and small scale businessmen. Some of them live on the embankment; some on the char while the others in the countryside. The institutional consultations were carried out with officials of the key departments including BWDB, DoE, agriculture department, fisheries department, and local body institutions.

12.3. Community Consultations

Consultations with the communities have been carried out with the help of 126 FGDs and 25 meetings. A total of 1,191 community members participated in these consultations. **Figures 12.1 to 12.3** present photographs of FGDs and a meeting conducted at the site; the details are presented in **Tables 12.1 and 12.2**.



Figure 12.1: An FGD Conducted at the Project Site



Figure 12.2: An FGD Conducted at the Project Site



Figure 12.3: A Meeting Conducted at the Project Site

Table 12.1: Details of FGDs Conducted by EIA Team

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
Water Resource						
1	29-08-14	N24 ⁰ 24' 22.1'' E 89 ⁰ 42' 33.9''	BAOITARA, SAYDABAD, SADAR, SIRAJGANJ	14	0	14
2	30-08-14	N24 ⁰ 24'22.1''	KADAI, KALIAHARIPUR,	12	0	12

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
		E 89°42'33.9"	SADAR, SIRAJGANJ			
3	30-08-14	N24°28'13.5" E 89°42'43.8"	CHAKRABADAMPARA, EKDALA, SADAR, SIRAJGANJ	8	0	8
4	30-08-14	N24°32'43.6" E 89°40'29.2"	PANCHTAKURI, CHANGASHA, SADAR, SIRAJGANJ	13	2	15
5	30-08-14	N24°33'19.7" E 89°39'57.8"	BALIAGHUGRI, CHANGASHA, SADAR, SIRAJGANJ	10	0	10
6	31-08-14	N24°35'42.2" E 89°38'50"	BISHUVOGACHA,RATANK ANDI, KAZIPUR,SIRAJGANJ	18	0	18
7	31-08-14	N24°36'11.6" E 89°38'47.8"	HATKHOLABAZAR,SHUV OGACHA,KAZIPUR,SIRAJG ANJ	03	17	20
8	31-08-14	N24°36'28.5" E 89°38'55"	BAOIKHOLA KHAL JOINT,RATANKANDI, KAZIPUR,SIRAJGANJ	9	0	9
9	02-09-14	N24°39'59.3" E 89°38'48.9"	MEGHAI,KAZIPUR,SIRAJG ANJ	12	0	12
10	05-09-14	N24°41'27.4" E 89°37'32.1"	VUTBARIA,BHANDARBAR I,DHUNAT,BOGRA	10	0	10
11	05-09-14	N24°48'26.4" E 89°35'3.5"	CHUNIAPARA GOSHAIBARI,DHUNAT,BO GRA	8	12	20
12	03-09-14	N24°47'43.2" E 89°35'50.8"	CHANDANBAISHA,SARIA KANDI,BOGRA	08	7	15
13	03-09-14	N24°51'26.3" E 89°34'35.3"	PARDEBDANGA,KUTUBPU R,SARIAKANDI,BOGRA	3	3	6
14	03-09-14	N24°53'31.3" E 89°35'40.5"	SALUKARCHAR,KAJLA,SA RIAKANDI,BOGRA	5	2	7
15	04-09-14	N24°54'53.3" E 89°34'27.8"	ANTERPARA,SARIAKANDI ,BOGRA	6	2	8
16	06-09-14	N24°55'58.4" E 89°34'23.2"	HASNAPARA,SARIAKAND I,BOGRA	6	4	10
17	06-09-14	N24°58'37" E 89°33'33.3"	CHALKANDI,PAKULLA,SO NATOLA,BOGRA	12	0	12
18	07-09-14	N 24°2'32.6" E 89°33'58"	KUNDUPARA JHUMARBARI,SHAGHATA, GAIBANDHA	10	01	11
19	07-09-14	N 25°3'15.8" E 89°33'56.9"	BASHANTERPARAJHUMA RBARI,SHAGHATA,GAIBA NDHA	11	0	11

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
20	07-09-14	N25°6'58.8" E89°34' 8.1"	HASILKANDI,SHAGHATA, GAIBANDHA	5	0	5
21	08-09-14	N25°9'17.4" E 89°34'51.4"	PUTIMARI,KACHUA,SHAG HATA,GAIBANDHA	2	5	7
22	08-09-14	N25°11'41.5" E89°34'25.8"	NILKUTHI,VARATKHALI,S HAGHATA,GAIBANDHA	0	8	8
23	08-09-14	N25° 14'11.3" E 89° 34'48.3"	KATLAMARI,GAZARIA,FU LCHORI,GAIBANDHA	9	0	9
24	08-09-14	N25.15°15'1.3" E 89°33'47.9"	AMNATHER VITA(RATANPUR), BADAIKHALI,SADAR,GAIBANDHA	10	0	10
25	09-09-14	N25°18'44.4" E89° 36'50.6"	KANCHIPARA,KANCHIPARA, FULCHORI,GAIBANDHA	12	0	12
26	09-09-14	N25°18'56.7" E89°38'32.6"	HARDANGA CHAR,KANCHIPARA,FULC HORI,GAIBANDHA	5	2	7
27	09-09-14	N25°20'50.5" E89°36'37.76"	BAGURIA KUMERVITA AND TALTOLA,GIDARI,SADAR, GAIBANDHA	10	0	10
28	10-09-14	N25° 20'58.7" E89°36'28.4"	POCHAKURA,GIDARI,SADAR, GAIBANDHA	5	4	9
29	11-09-14	N25° 37'07.6" E89°41'16.4"	KACHKOLE(MAGURABEEL), RANIGANJ,CHILMARI,KURIGRAM	8	0	8
30	12-09-14	N 25° 38'610.2" E 89°41' 27.2"	KALIKURA-SARKERPARA, RANIGANJ,CHILMARI,KURIGRAM	17	3	20
31	12-09-14	N 25° 41'6.2" E 89°41' 18"	PURAN ANANTOPUR,HATIA,ULIPUR, KURIGRAM	10	2	12
32	13-09-14	N 25° 47'47.5" E 89°43' 42.2"	KHAMA RASULPUR,GHOGADOHO, SADAR,KURIGRAM	5	10	15
Fish and Fisheries						
33	29-08-14	N24° 24'22.1" E 89° 42'33.9"	BAOITARA,SAYDABAD,SADAR, SIRAJGANJ	12	0	12
34	30-08-14	N24° 28'13.5" E 89° 42'43.8"	CHAKRABADAMPARA,EKDALA, SADAR,SIRAJGANJ	4	0	4
35	30-08-14	N24° 33'19.7" E89° 39' 57.8"	BALIAGHUGRI,CHANGACHA, SADAR, SIRAJGANJ	6	0	6

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
36	31-08-14	N24° 35' 42.2" E 89° 38' 50"	BISHUVOGACHA, RATANKANDI, SADAR, SIRAJGANJ	9	1	10
37	31-08-14	N24° 36' 28.5" E 89° 38' 55"	BAOIKHOLA KHAL JOINT, RATANKANDI, SADAR, SIRAJGANJ	9	0	9
38	02-09-14	N24° 39' 59.3" E 89° 38' 48.9"	MEGHAI, KAZIPUR, SIRAJGANJ	3	7	10
39	05-09-14	N 24° 41' 27.4" E 89° 37' 32.1"	VUTBARIA, BHANDARBARI, DHUNAT, BOGRA	4	0	4
40	05-09-14	N 24° 43' 48.7" E 89° 37' 20.2"	SHAMOLBARI, VANDERBARI, DHUNAT, BOGRA	4	1	5
41	05-09-14	N24° 48' 26.4" E 89° 35' 3.5"	CHUNIAPARA GOSHAIBARI, DHUNAT, BOGRA	6	4	10
42	03-09-14	N24° 47' 43.2" E 89° 35' 50.8"	CHANDANBAISHA, SARIAKANDI, BOGRA	6	0	6
43	03-09-14	N 24° 51' 26.3" E 89° 34' 35.3"	PARDEBDANGA, KUTUBPUR, SARIAKANDI, BOGRA	3	0	3
44	03-09-14	N24° 53' 31.3" E 89° 35' 40.5"	SALUKARCHAR, KAJLA, SARIAKANDI, BOGRA	6	1	7
45	04-09-14	N24° 54' 53.3" E 89° 34' 27.8"	ANTARPARA, SARIAKANDI, BOGRA	6	2	8
46	06-09-14	N24° 55' 58.4" E 89° 34' 23.2"	HASNAPARA, SARIAKANDI, BOGRA	4	4	8
47	07-09-14	N25° 6' 58.8" E 89° 34' 8.1"	HASILKANDI, SHAGHATA, GAIBANDHA	2	0	2
48	08-09-14	N25° 9' 17.4" E 89° 34' 51.4"	PUTIMARI, KACHUA, SHAGHATA, GAIBANDHA	2	5	7
49	08-09-14	N25° 11' 41.5" E 89° 34' 25.8"	NILKUTHI, VARATKHALI, SHAGHATA, GAIBANDHA	0	8	8
50	08-09-14	N25° 14' 11.3" E 89° 34' 48.3"	KATLAMARI, GAZARIA, FULCHORI, GAIBANDHA	8	0	8
51	09-09-14	N25° 18' 44.4" E 89° 36' 50.6"	KANCHIPARA, KANCHIPARA, FULCHORI, GAIBANDHA	10	0	10
52	09-09-14	N25° 18' 56.7" E 89° 38' 32.6"	HARDANGA CHAR, KANCHIPARA, FULCHORI, GAIBANDHA	4	2	6
53	09-09-14	N25° 20' 41.4" E 89° 36' 10.2"	BAGURIA, GIDARI, SADAR, GAIBANDHA	10	0	10

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
54	10-09-14	N25° 20' 58.7" E89° 36' 28.4"	POCHAKURA, GIDARI, SADAR, GAIBANDHA	5	0	5
55	10-09-14	N25° 20' 57.9" E89° 37' 03.1"	PROPOSED MANOS REGULATOR, PERBAGURIA, GIDARI, SADAR, GAIBANDHA	4	4	8
56	11-09-14	N25° 23' 39.8" E89° 37' 32.2"	BAROBALDIA, MALIBARI, SADAR, GAIBANDHA	3	1	4
57	11-09-14	N25° 33' 15.1" E89° 39' 16.1"	HORICHIRI GHAT, MAJHIPARA, RAMNA, CHILMARI, KURIGRAM	7	0	7
58	11-09-14	N25° 37' 07.6" E89° 41' 16.4"	KACHKOLE (MAGURABEEL), RANIGANJ, CHILMARI, KURIGRAM	8	0	8
59	11-09-14	N25° 37' 41.4" E89° 41' 22.1"	SHIMULTOLA/MAGURABEEL, RANIGANJ, CHILMARI, KURIGRAM	8	0	8
60	12-09-14	N 25° 38' 61.2" E 89° 41' 27.2"	KALIKURA-SARKERPARA, RANIGANJ, CHILMARI, KURIGRAM	10	0	10
61	12-09-14	N 25° 41' 6.2", E 89° 41' 18"	PURAN ANANTOPUR, HATIA, ULIPUR, KURIGRAM	6	0	6
62	12-09-14	N 25° 42' 20.8", E 89° 41' 26.6"	PURBO ATHAROPAICA, BURABURI, ULIPUR, KURIGRAM	2	0	2
63	13-09-14	N 25° 47' 47.5", E 89° 43' 42.2"	KHAMA RASULPUR, GHOGADOHO, SADAR, KURIGRAM	5	2	7
64	13-09-14	N 25° 51' 21.2", E 89° 40' 10.7"	SARKERPARA, GHOGADAHO, SADAR, KURIGRAM	1	0	1
Agriculture						
65	01-09-14	N 24° 33' 19.7", E 89° 39' 57.8"	BALIAGHUGRI, CHANGACHA, SADAR, SIRAJGANJ	6	0	6
66	01-09-14	N 24° 34' 0.9", E 89° 39' 23.7"	BAHUKA, RATANKANDI, SADAR, SIRAJGANJ	8	0	8
67	02-09-14	N 24° 40' 06.1", E 89° 38' 49.5"	MEGHAI, KAZIPUR SADAR, SIRAJGANJ	4	0	4
68	02-09-14	N 24° 40' 28.8", E 89° 38' 03.0"	MAIZBARI, MAIZBARI, KAZIPUR, SIRAJGANJ	6	0	6
69	02-09-14	N 24° 43' 56.4", E 89° 36' 54.7"	SINGRABARI, KAZIPUR SADAR, SIRAJGANJ	2	0	2

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
70	03-09-14	N 24° 47'43.2", E 89° 35'55.0"	CHAR CHANDANBAISHA, SARIAKANDI, BOGRA	6	6	12
71	03-09-14	N 24°51'33.3", E 89° 34'30.8"	PARDEBDANGA,KUTUBPUR, SARIAKANDI,BOGRA	4	3	7
72	03-09-14	N 24° 53'56.8", E 89° 35'40.5"	SALUKARCHAR,KAJLA, SARIAKANDI,BOGRA	3	0	3
73	04-09-14	N 24° 54'53.3", E 89° 34'21.8"	ANTARPARA,SARIAKANDI SADAR, BOGRA	7	0	7
74	05-09-14	N 24° 41'48.5", E 89° 37'30.2"	BHUTBARI, BHANDARBARI, DHUNAT, BOGRA	4	0	4
75	05-09-14	N 24° 43'35.6", E 89° 37'04.1"	BANIAJAN, BHANDARBARI, DHUNOT, BOGRA	7	0	7
76	05-09-14	N 24° 48'26.4", E 89°35'3.5"	CHUNIAPARA, GOSHAIBARI, DHUNAT, BOGRA	3	0	3
77	06-09-14	N 24° 55'58.4", E 89°34'08.7"	HASNAPARA, SARIAKANDI, BOGRA	7	0	7
78	07-09-14	N 24° 02'31.5", E 89° 33'57.3"	BOSONTER PARA, JUMARBARI, SHAGHATA, GAIBANDHA	3	0	3
79	07-09-14	N 25°6'59.0", E 89°35' 04.1"	HASILKANDI,SHAGHATA, GAIBANDHA	2	0	2
80	07-09-14	N 25° 13'25.4", E 89° 34'54.8"	PURBO KATLAMARI, GOZARIA, PHULCHHORI, GAIBANDHA	2	0	2
81	08-09-14	N 25° 08'41.7", E 89° 35'02.6"	KACHUA, SHAGHATA SADAR, GAIBANDHA	3	0	3
82	09-09-14	N 25°18'44.4", E 89° 36'50.6"	KAYERHAT, KONCHIPARA, PHULCHHORI, GAIBANDHA	2	0	2
83	09-09-14	N 25°18'56.7", E 89°38'32.6"	HAOR DANGA, KONCHIPARA, PHULCHHORI, GAIBANDHA	2	5	7
84	09-09-14	N 25°20'03.3", E 89°36'18.0"	BAGURIA,GIDARI,SADAR, GAIBANDHA	4	0	4
85	09-09-14	N 25°20'40.7", E 89°35'57.4"	TALTOLA, GHAGOA, SADAR, GAIBANDHA	2	0	2
86	10-09-14	N 25°20'58.7", E 89°36'28.4"	POCHAKURA, GIDARI, SADAR, GAIBANDHA	4	0	4

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
87	10-09-14	N 25°23'39.8", E 89°37' 32.2"	KAMARJANI, SADAR, GAIBANDHA	4	0	4
88	11-09-14	N 25°37'35.7", E 89°41'21.3"	MAGURAR BEEL, RANIGANJ, CHILMARI, KURIGRAM	2	0	2
89	12-09-14	N 25° 38'10.2", E 89° 41' 27.2"	KALIKURA-SARKERPARA, RANIGANJ, CHILMARI, KURIGRAM	4	0	4
90	12-09-14	N 25° 41'06.2", E 89° 41' 18.0"	ANANTOPUR, HATIA, ULIPUR, KURIGRAM	3	0	3
91	13-09-14	N 25° 50'40.6", E 89° 43' 59.8"	KHAMAR RASULPUR, GHOGADOHO, SADAR, KURIGRAM	2	0	2
92	29-08-14	N 24°24'51.6", E89°42'50.9"	CHATIANTOLI, KALIA HARIPUR, SIRAJGANJ	4	0	4
93	30-08-14	N 24° 28'13.6", E 89° 42'43.3"	EKDALA, SIRAJGANJ SADAR	2	0	2
94	30-08-14	N 24° 25'28.4", E 89° 42'50.5"	PACHTHAKURI , CHANGACHA, SADAR, SIRAJGANJ	3	0	3
95	30-08-14	N24° 33'19.67", E89° 39'57.8"	BALIAGHUGHRI, CHANGACHA, SIRAJGANJ	4	0	4
96	31-08-14	N24° 32'52.9", E89° 40'04.0"	CHAR-BALIAGHUGHRI , CHANGACHA, SIRAJGANJ SADAR	3	0	3
97	31-08-14	N24°35' 41.4", E89° 38'52.6"	RATANKANDI, KAZIPUR, SIRAJGANJ	5	0	5
98	31-08-14	N24° 34'53.3", E89°39'36.1"	SHUVGACHA, RATANKANDI, KAZIPUR, SIRAJGANJ	2	2	4
99	02-09-14	N24° 39'54.69", E89° 38'43.5"	MEGHAI, KAZIPUR, KAZIPUR, SIRAJGANJ	3	0	3
100	03-09-14	N24° 47'43.2", E89° 35'55.5"	CHANDANBAISHA, SARIAKANDI, BOGRA	2	2	4
101	03-09-14	N24° 51'33.3", E89° 34'30.8"	DEBDANGA, KUTUBPUR, SARIAKANDI	2	1	3
102	03-09-14	N24° 53'56.8", E89°35'40.5"	CHAR SALUKA, KAZLA UNION, SARIAKANDI, BOGRA	3	0	3
103	04-09-14	N24° 55'07.6", E89°34'14.8"	ONTORPARA , SARIAKANDI	5	0	5
104	06-09-14	N24° 55'57.0", E89° 34'04.6"	HASNAPARA, HATHSHERPUR,	4	1	5

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
			SARIAKANDI			
105	05-09-14	N24° 41'48.3'' E89° 37'30.2''	VUTBARI, BHANDERBARI, DHUNAT, BOGRA	3	0	3
106	05-09-14	N24° 41'54.2'' E89° 37'30.2''	VANDARBARI, VABDARBARI, DHUNAT, BOGRA	8	0	8
107	05-09-14	N24° 44'34.9'' E89° 36'50.5''	PURBO CHUNIAPARA, GOSHAIBARI, DHUNOT	7	0	7
108	05-09-14	N24° 43'56.4'' E89° 36'54.7''	SHIMULBARI , VANDARBARI, DHUNAT, BOGRA	5	1	6
109	06-09-14	N25° 06'58.8'' E89° 35'04.2''	CHARPAKULLA, PAKULLA , SONATOLA , BOGRA	8	2	10
110	07-09-14	N25° 11'41.5'', E89° 34'25.8''	NILKHUTI, VARATKHALI, SHAGHATA, GAIBANDHA	5	0	5
111	08-09-14	N25°13'25.4'' E89° 34'54.8''	NILKUTHI BADH, KANCHIPARA, FULCHARI, GAIBANDHA	6	0	6
112	07-09-14	N25°02'31.5'' E89°33'57.3''	KUNDUPARA, JUMURBARI, SHAGHATA,GAIBANDHA	10	0	10
113	07-09-14	N25°07'01.7'' E89°35'03.5''	HASILKANDI, SAGHATA,GAIBANDHA	3	0	3
114	09-09-14	N25°18'44.4'' E89°36'50.6''	KANCHIPARA,FULCHORI, GAIBANDHA	3	0	3
115	10-09-14	N25°20'49.6'' E89°36'42.7''	POCHAKURA,GIDARI,SAD AR, GAIBANDHA	6	0	6
116	10-09-14	N25°20'57.7'' E89°37' 03.1''	ANALERCHARA,GIDARI,S ADAR,GAIBANDHA	5	0	5
117	11-09-14	N25°23'39.7'' E89°37'32.5''	BAROBOLDIA,MALIBARI, SADAR, GAIBANDHA	4	0	4
118	11-09-14	N25°37'07.6'' E89°41'21.3''	KACHKOL,RANIGANJ,CHI LMARI,KURIGRAM	4	0	4
119	09-09-14	N25°18'40.0'' E89°36'53.5''	KANCHIPARA,KANCHIPA RA,SUNDARGANJ	3	0	3
120	09-09-14	N25°18'56.7'' E89°38'32.5''	HARDANGA,FULCHARI , GAIBANDHA	6	0	6
121	12-09-14	N25°33'14.7'' E89°39'15.5''	PATROHATA, RAMNA ,CHILMARI, KURIGRAM	2	1	3
122	12-09-14	N25°41'06.2'' E89°41'18.5''	ANANTAPUR, HATIA, ULIPUR, KURIGRAM	4	0	4

	Date	Location	Meeting Place	Number of Participants		
				Male	Female	Total
123	12-09-14	N25°42'20.7'' E89°41'26.6''	PURBO ATHAROPAICA, BURABURI, ULIPUR, KURIGRAM	3	0	3
124	13-09-14	N25°50'40.6'' E89°43'30.3''	ZATRAPUR,SADAR , KURIGRAM	5	1	6
125	13-09-14	N25°50'40.7'' E89°43'59.5''	KHAMA RASULPUR,GHOGADOHO, SADAR,KURIGRAM	3	0	3
126	08-09-14	N25°14'11.7'' E89°34'59.0''	PURBO KATLAMARI, FULCHARI, KURIGRAM	5	0	5
			Total	709	151	860

Table 12.2: Details of Consultation Meetings Conducted by EIA Team

	Date	Location	Meeting Place	No. of Participants		
				Male	Female	Total
1	30-08-14	N24° 24' 22.1'' E 89° 42' 33.9''	KADAI, KALIAHARIPUR, SADAR, SIRAJGANJ	18	0	18
2	30-08-14	N 24° 32' 43.6'' E 89° 40' 29.2''	PANCHTAKURI, CHANGASHA, SADAR, SIRAJGANJ	13	2	15
3	1-09-14	N24° 33' 19.7'', E89° 39' 57.8''	BALIAGHUGRI, CHANGASHA, SADAR, SIRAJGANJ	19	0	19
4	1-09-14	N 24° 34' 0.9'' E 89° 39' 23.7''	BAHUKA, RATANKANDI, SADAR, SIRAJGANJ	17	0	17
5	31-08-14	N24° 35' 42.2'', E 89° 38' 50''	BISHUVOGACHA,RATANK ANDI,KAZIPUR,SIRAJGANJ	18	0	18
6	31-08-14	N24° 36' 28.5'', E 89° 38' 55''	BAOIKHOLA KHAL JOINT,RATANKANDI,KAZI PUR,SIRAJGANJ	16	0	16
7	02-09-14	N24° 39' 59.3'' E 89° 38' 48.9''	MEGHAI, KAJIPUR, KAZIPUR, SIRAJGANJ	12	0	12
8	02-09-14	N24° 39' 59.3'', E 89° 38' 48.9''	DOKKHINPARA, MEGHAI, KAZIPUR, SIRAJGANJ	10	0	10
9	05-09-14	N 24° 41' 27.4'', E 89° 37' 32.1''	VUTBARIA, BHANDARBARI, DHUNAT,BOGRA	10	0	10
10	05-09-14	N24° 48' 26.4'', E 89° 35' 3.5''	CHUNIAPARA GOSHAIBARI, DHUNAT, BOGRA	8	12	20
11	03-09-14	N24° 47' 43.2'',	CHANDANBAISHA, SARIAKANDI, BOGRA	15	4	19

	Date	Location	Meeting Place	No. of Participants		
				Male	Female	Total
		E 89° 35' 50.8"				
13	03-09-14	N 24° 51' 26.3", E 89° 34' 35.3"	PARDEBDANGA,KUTUBPUR, SARIAKANDI,BOGRA	6	6	12
12	03-09-14	N24° 53' 31.3" E 89° 35' 40.5"	SALUKARCHAR, KAJLA, SARIAKANDI, BOGRA	5	2	7
13	04-09-14	N24° 54' 53.3", E 89° 34' 27.8"	ANTERPARA, SARIAKANDI, BOGRA	6	2	8
14	06-09-14	N24° 55' 58.4", E 89° 34' 23.2"	HASNAPARA, SARIAKANDI, BOGRA	6	4	10
15	06-09-14	N 24° 58' 37" E 89° 33' 33.3"	CHALKANDI, PAKULLA, SONATOLA, BOGRA	12	0	12
16	07-09-14	N 25° 2' 32.6", E 89° 33' 58"	KUNDUPARA JHUMARBARI, SHAGHATA, GAIBANDHA	10	01	11
17	08-09-14	N25° 14' 11.3", E 89° 34' 48.3"	KATLAMARI,GAZARIA,FU LCHORI,GAIBANDHA	9	0	9
18	08-09-14	N25° 15' 1.3", E 89° 33' 47.9"	AMNATHER VITA (RATANPUR), BADAIKHALI, SADAR, GAIBANDHA	10	0	10
19	09-09-14	N25° 18' 44.4", E89° 36' 50.6"	KANCHIPARA, FULCHORI, GAIBANDHA	12	0	12
20	09-09-14	N25° 18' 56.7", E89° 38' 32.6"	HARDANGA CHAR, KANCHIPARA, FULCHORI, GAIBANDHA	5	2	7
21	09-09-14	N25° 20' 50.5", E89° 36' 37.76"	BAGURIAKUMERVITA and TALTOLA, GIDARI,SADAR, GAIBANDHA	10	0	10
22	10-09-14	N25° 20' 58.7" E89° 36' 28.4"	POCHAKURA, GIDARI, SADAR, GAIBANDHA	5	4	9
23	11-09-14	N25° 37' 07.6" E89° 41' 16.4"	KACHKOLE (MAGURABEEL), RANIGANJ, CHILMARI, KURIGRAM	8	0	8
24	12-09-14	N 25° 38' 610.2", E 89° 41' 27.2"	KALIKURA-SARKERPARA, RANIGANJ, CHILMARI, KURIGRAM	17	3	20
25	12-09-14	N 25° 41' 6.2", E 89° 41' 18"	PURAN ANANTOPUR, HATIA, ULIPUR, KURIGRAM	10	2	12
			Total	287	44	331

12.4. Key Issues Discussed during Consultations

The key issues discussed during the consultations are described below.

RBIP and its EIA. During each FGD and consultation meeting, the participants were informed about the project, its key objectives, and its components. People were very supportive of the project and greatly appreciated the GoB's initiative to address the on-going problems associated with river bank erosion and embankment failure.

The participants of FGDs and consultation meetings were also apprised about the EIA study, its objectives and methodology, and its intended outcome. They generally understood the importance of the environment and its care, and generally supported the study.

River Bank Erosion. The respondents described river bank erosion as one of the most critical problems in the area. In all public consultations which took place in the four districts of Sirajganj, Bogra, Gaibandha and Kurigram, erosion was reported with varying frequencies in different places. In Gaibandha district, as much as 20 decimal³⁶ of land is lost each day by erosion. Places such as Taltala, Ghagoa Sadar, and Baguria Sadar in Gaibandha district are vulnerable to erosion. In Kurigram district the more vulnerable places include Kalikura-Sarkerpara, Raniganj, Chilmari, Anantapur, Hatia, and Ulipur; up to 33 decimal of land is sometimes lost each day in these places because of the river bank erosion – as reported by the respondents. The proposed project having river bank protection as one of its components was therefore unanimously supported by all of the respondents.

Destruction of crops. The respondents reported that seasonal flood destroyed crops on regular basis. Different places were reported as vulnerable to seasonal flood and resulting crop destruction. Meghai of Sirajganj was described as one such place among others. In Majbari, standing crops over 80 *bigha* (one-third of an acre) of land were lost to flood. Crop damages were also reported from Singrabari in Sirajganj, Bhutbari in Dhunat upazilla, and Hashialkandi in Shagata. Similarly, huge crop damages caused by monsoon floods were reported from Par Devdanga located in Bogra. During the consultations, it was explained to the communities that the proposed project would address crop damages caused by floods from Jamuna river.

Facilitating cultivation. The respondents from places that are vulnerable to flood and subsequent destruction urged the construction of embankment. In Sirajganj area, local people observed that dry season cultivation may be benefitted if water can be retained in the low lying areas by constructing embankment. The people of Bahuka and Ratankandi in Sirajganj area noted as high as 2800 *bigha* (more than 90 acres) land cultivation will be benefitted by the embankment. In Meghai of Kazipur, people identified 300 *bigha* land located in low lying areas that would be benefitted. In Chandanbaissa also people opined that embankment would benefit crop production.

Sluice gates. The respondent identified sluices as an important element of the embankment system in the area. They pointed out that with the help of these sluices, water flow of the river and water channels (*khals*) could be regulated to address among others the water logging problem in the area and hence enhance cultivation output.

The issue of sluice gates was raised during a number of consultation meetings and FGDs. In Chuniapara and Goshaihari of Dhunat (Bogra), the respondents indicated the need of a

³⁶ Decimal is one-hundredth of an acre.

regulator to drain out water from water logged area. People of Purbo Katlamari, Gozaria, and Fulchari of Gaibandha also asked for a regulator to drain out water during monsoon and bring in river water during dry season. In Baguria, the community under its own initiative has installed a pipe to drain out water. Here also people asked for a sluice gate. In Taltola and Ghagoa in Gaibandha, the Puiagarir Beel remains under water so *aman* rice cannot be cultivated. The respondent pointed out that the problem could be adequately addressed if sluice gate was constructed. In Ponchakhuria, and Gidari of Gaibandha the Pakhimarar beel has the same problem and people asked for a regulator. In Kamarjani of Gaibandha, people had installed a pipe to clear water logging; however the authorities removed that pipe. Now the people asked for a sluice gate at this location. In Magurar Beel, Raniganj, and Chilmari of Kurigram the existing sluice gate was not working and hence the local people asked for rehabilitation of this gate. In Kalikura-Sarkerpara, Raniganj, and Chilmari of Kurigram the local people suggested shifting the proposed regulator to Boiragir vita, to make it more effective. The respondent also stressed that the existing regulator at Magura should be repaired to improve water logging. In Anantapur, Hatia, and Ulipur of Kurigram, crops over about 35000 acre of land were lost, hence the local community asked for a regulator. In Khamar Rosulpur, Ghogadaho, and Sadar of Kurigram the existing 4-vent regulator was not working anymore. The community therefore asked for a regulator with 8/9 vents. In Antarpara of Bogra, the local people asked that the site for proposed regulator should be moved towards the canal of Deuly beel.

Perceived benefits. The respondents indicated that they would construct houses in Shalukar char (Sairkandi), if embankment was built. In Banijan Dhunot, the community pointed out that agricultural marketing would be benefitted if the project as implemented. Stakeholders in Sirajganj opined that once the project was implemented, water passage could be controlled more effectively, thus benefiting cultivation.

Loss of land. Some respondents shared their concerns regarding the land that would be required for the project implementation. The people in Balighughri, Chhongachha and Sadar of Sirajganj noted that they would lose 20 acres of crop land as a result of the project. In Antarpara of Bogra, the respondents said that they would lose 20 *bigha* of land because of the new alignment of the embankment. The communities expected adequate compensation for their losses caused by the project.

Embankment infrastructure. In Sirajganj Sadar, the respondent pointed out that river bank protection would be needed before embankment was constructed. Above opinion was also shared by the people of Bishubgacha, Sirajganj. The respondents in Sirajganj pointed out that trees could not protect the embankment from flood. The people of Bahuka and Ratankandi stressed that sandy soil should not be used in the construction activities. The people of Purbo Katlamari, Gozaria, and Fulchari of Gaibandha asked to shift embankment towards river. People of Kachua also expressed similar opinion. Some respondents indicated that both drought and monsoon flood caused crop damages crops hence attention should be given to both. The people of Kayerhat, Konchipara, and Fulchari of Gaibandha suggested the placement of underground pipe to bring water for irrigation thus reducing the existing cost of irrigations. Local people Bahuka of Sirajganj asked for underground drainage arrangements to reduce water logging.

Water channels and water ponds (khals and beels). The presence of water channels (*khals*) and water ponds (*beels*) marks the area of Kadai and Saidabad in Sirajganj. Kata khal is one such water channel. There is also a BWDB channel here that is a fish breeding site as well as source of surface water irrigation. There is also Ghuria beel in the

place with a connection with Jamuna river. During rainy season the surrounding places are inundated. Local people want to drain out the locality through Hurasagor River. There exists a section of old embankment here and flood water reaches to that level. Panchtakuri Changacha of Sirajganj is flooded regularly and in 1988 the flood water reached a height of 16 to 20 meters. Through small holes in the existing BWDB embankment, water seeps to the countryside affecting crops. The respondents reported that 27 villages of Bishubgacha and Ratankandi of Sirajganj went under water owing to recent flood triggered by the Banaijan khal and others. In Balighughri and Changacha of Sirajganj, there are two *koles* (a kind of a small lagoon) named Mothiarkul (panchtakuri) and Simla that are rich in fish diversity and are breeding ground of various fishes. In Meghai of Sirajganj there is the Paikartoli beel that remains waterlogged throughout the year and is blocked by the BWDB embankment. Halotkhal is also obstructed by BWDB embankment and its connectivity with the Ichamoti River is blocked. In this place a pond has been constructed by BWDB to facilitate fish cultivation. In Vutbaria, Pukuria, Shimulbari char, and Bhandarbari of Bogra the connection between Manos river and the Jamuna river at Daripara has been blocked by the BWDB embankment. In Chandanbaisha of Bogra the role of Bangali river is important; the water level of Bangali river influences Kutubpur khal of this locality, having an effect on flooding and inundation. The BWDB embankment is severely damaged here causing flooding in huge areas. In Kajla of Sariakandi, several chars such as Pukuria Char, Dakatmara Char, Ghaigar Char, Chera Pachbari char, Indurmara Char and Manik Char are inundated. Antarpara regulator remains dis-functional hence several areas of Bogra like Hasnapara suffer from water logging. In Gaibandha district also there are several khals and beels, for example in Kundupara, Jhumarbari of Saghata there are Kalihata Khal, Satbila khal, Bashanterpara Khal, Modhupur khal and Kundupara khal. The prominent beels are Burunga, Saluka, Gozaria and Shat Beel. These places are inundated flooding the surrounding areas as well. In Kanchipara and Fulchari of Gaibandha the condition of BWDB embankment is bad hence not much effective for flood control. Beels and khals are also found in Kurigram which also cause inundation in the surrounding areas. For example in Raniganj and Chilmari of Kurigram there are prominent khals and beels named Pakhimara beel and Puiya Gara which are inundated to some extent.

Khal excavation. The respondents indicated water congestion and irrigation as among the major issues in the project area. Retention capacity of the khals, beels and local rivers need to be increased according to the opinion of the community members consulted. Both small scale and large scale dredging has been suggested by the people. At the local level, khals and beels are suggested for dredging and at the higher level river dredging is also suggested. For example the people of Kadai in Sirajganj pointed out that the local canal should be dredged. The people of Panchtakuri Changacha of Sirajganj suggested the dredging of Ichamoti river for surface water irrigation to reduce pressure on ground water. Banaijan Canal and Baoaikhola khal of Sirajganj was also suggested for dredging. The respondents stressed that Paikartoli beel and Halot khal at Kazipur, Sirajganj should be dredged for proper connectivity with the Ichamoti and Jamuna rivers to ensure flood protection and facilitate irrigation, and Bhandarbari khal should be dredged in Vutbaria of Bogra. The people in Gaibandha and Kurigram suggested the dredging of Jamuna River and from Teesta Railway bridge to Bahadurabad Ghat to increase the flow of water.

Sedimentation. Community people pointed out the problems of water logging and flooding. In their opinion, the issue of sedimentation is related to some extent with this aspect. Huge amount of silt regularly flows through Jamuna river and its connected khals

and smaller rivers raising the bed and reducing the depth. It has negative implication for the water retaining capacity. This issue was raised during consultations in all four districts of the project area. The volume of sedimentation was reported to range from 1 to 2 feet. The sedimentation problem was reported in Kadai, Saidabad, Panchtakuri Changacha or Maghai in Sirajganj, Bhutbaria of Dhunat, Bogra, as well as various locations in Gaibandha and Kurigram districts.

Ground water quality. The respondents informed that hand pump was generally used to procure drinking water in the project area. They informed that water was available at the depth of 40 to 50 feet. Drinking water was reported to be dull in color indicating the possible presence of iron or other minerals; also the presence of silt could not be ruled out. The people informed that many tube-wells were sealed because of arsenic presence in the water, though 20 percent of the people still depended on tube-wells with arsenic contamination.

Fishing. The people of Sirajganj living in the low lying areas observed that the construction of embankment would benefit fish cultivation in the area. In Bahuka of Sirajganj local people pointed out the positive effect of a regulator on fishing in the locality.

The respondents reported that the fish migration route at certain places were either blocked or hindered because of various reasons including blockage of khals and rivers. The one linking Banaijan khal, Baoaikholah khal and Ichamoti river at Ratankandi, Sirajganj is presently severely hindered requiring dredging and the placement of a box culvert to restore the migration route and enable surface water irrigation. The migration route at Meghai, Sirajganj facilitating fish migration could also be improved by dredging of Paikartoli beel and Halot khal. The migration route between Jamuna river and Bangali river through Manas river is obstructed by the embankment. Similarly the connectivity of Dauli beel and Vakir beel with Bangali river in Bogra is affected by a damaged regulator. A number of proposed regulators could be beneficial for fishing habitat by providing migration route and offering favorable conditions, as opined by the community members. For example the regulator in Chaitantoli area would allow fishing in Baoitara and Saidabad areas of Sirajganj. Similarly the proposed Baliaghugri regulator would increase the surface water availability thus facilitating pond aquaculture and crop cultivation in rainy season without irrigation, as opined by the people of Baliaghugri and Changacha, in Sirajganj. Gandu molar beel in at Sariakandi Bogra is another one requiring attention as the proposed alignment may take away its 40 percent area. The people pointed out that the proposed Baguria regulator in Sadar, Gaibandha would connect many water bodies with the Jamuna river, contributing to aquaculture in the surrounding area along with fish diversity. The people of Kurigram in the areas of Raniganj and Chimari identified four water bodies namely Kachkole, Kolapani, Badhdhara and Uttarowari as the last habitat of brood fish which should not be disturbed by any means.

12.5. Institutional Consultations

A total of 31 meetings were held with the officials of the BWDB, Department of Agricultural Extension, Department of Fisheries, and members of Union Parishads in four districts in the project area (see **Figures 12.4** and **12.5** for some photographs of these meetings). In addition, a meeting was held with the DoE in Dhaka. In the BWDB office, a meeting was held with the Chief Engineer, Superintend Engineer, Executive Engineers, Sub-divisional Engineers and the Assistant Engineers. In relation to the Department of Agricultural Extension, meetings were conducted with the Upazilla Extension Officers

and the Block Supervisors in all twelve Upazillas. Consultations were also carried out with the Upazila Fisheries Officers and the Assistant Fisheries Officers. Meetings were held with the Chairmen and the Councilors of a number of Union *Parishads* in the area. The key issues discussed in these consultations are described below.

BRE strengthening. The BWDB officials pointed out that flood was an annual phenomenon in the districts of Sirajganj, Bogra, Gaibandha and Kurigram. Strong wave action is a part of the flood process. Under the effect of such action, river bank erosion takes place the earthen cover of existing BRE is also damaged at several points. As a result the main objective of the embankment that is protecting the area against flood cannot be achieved. Weakening of the BRE is also caused by human activities such as breaching, construction of houses and others. In the given situation there is need for immediate measures to protect the embankment through strengthening. Fishery officers also emphasized the RBE strengthening to promote aquaculture in ponds and beels. Flood water washes away these ponds thus causing huge losses to farmers. The BWDB officials informed that the proposed design was based on field visits of the technical experts and their interaction with the local officials.

Regulators. The officials from various departments pointed out that the existing regulators were not functioning properly. Many regulators were reported to be worn out or damaged. According to them, they were neither addressing water logging nor facilitating fish migration. They stressed upon rehabilitation of the existing regulators.



Figure 12.4: A Meeting with Institutional Stakeholders



Figure 12.5: A Meeting with Institutional Stakeholders

Regulator maintenance. The officials informed that the maintenance of regulators was often neglected, because of no community involvement. As part of the government program such regulators are constructed for the benefit of the community, but the community does not involve itself in the maintenance. The BWDB officials pointed out that the community should be involved from the beginning for maintenance of regulators. Such involvement could be achieved by creating some local bodies, which would be responsible for regulator operation, surveillance and maintenance.

Need for new regulators. The BWDB officials at Gaibandha and Rangpur circles observed that more regulators would be needed to address the water logging problem being faced by the farmers in the area. During the community consultations discussed earlier in the Chapter, names of different water channels (khals) and lakes (beels) came up where water connectivity with the rivers was now blocked. Similarly, the names of other places also came up, indicating the need of new regulators. Since BRE created obstruction of water movement in certain areas, new regulators need to be constructed to address this problem.

Priority area identification. As per plan RBIP will be implemented in 50 kilometers on a priority basis. It is reported that this 50 kilometer was extremely flood-affected zone requiring immediate attention; the rest of 183 kilometer would be implemented afterwards. In the fifty kilometer stretch, four upazilla namely, Sirajganj Sadar, Kazipur, Dhunat and Sariakandi are included. The BWDB officials at Gaibandha opined that certain areas in Gaibandha were equally flood- and erosion-vulnerable, thus needing urgent attention.

Water and Air Quality: The respondents pointed out that RBIP would involve a large amount of earthwork and physical activity hence it would create profound dusty condition affecting health in the locality. They also opined that embankment and road construction could also spill water along the alignment, affecting fish population. The officials from BWDB and fisheries department stressed upon the need to employ appropriate measures to control such impacts and also to establish a comprehensive monitoring program during the project implementation.

Fish and fishing resources development. Immense concern was shown by the officials of Fishery, Agricultural Extension and BWDB about the fish and fishing resource development. Jamuna is famous for carp breeding thus it needs special attention. Fish habitats study in Jamuna river should be undertaken to ascertain the carp and other varieties of fish. Both the community members and officials indicated the hindrances faced by the fish population here. Some sanctuaries should be established at different points of the Jamuna river. There is also need for more fish migration routes. Thus planning is needed with the involvement of the community and experts to create new migration routes. In this respect connectivity of different rivers should be given attention. In this area earlier, there were splendid fish migration routes connecting different rivers; this connectivity needs to be restored. More fish migration structures are needed to facilitate fish migration from Jamuna to the other rivers and floodplain, similarly re-excavation of internal water bodies is also needed.

Irrigation and drainage. Special attention was demanded for provisioning irrigation through this project. In this regard internal chars and water channels need attention. Canals (khals) and lakes (beels) should be kept functional for the purpose of surface water irrigation and for different agricultural activities such as meeting water requirement at the time of jute putrefaction.

Resettlement planning. The respondents stressed that involvement of the BWDB officials was important for smooth resettlement planning and implementation. Proper compensation package should be proposed for the affected people including fisher folk households. During the construction period fishing would not be allowed on the side of the bank and it may affect the interest of the subsistence fishermen. Similarly the squatters also need special attention in the resettlement package. To compensate for the loss of livelihood of the affected community aquaculture pond may be created in the resettlement zone.

Expansion of flood protection. The places for which RBIP is designed are now also affected by the flooding from Teesta, Dharla and Dudhkumar rivers. The BWDB officials recounting their past experience argued that unless these rivers were also taken into consideration the outcome of RBIP could not be achieved. Hence the project should also cover these rivers.

12.6. Consultations by Social Safeguard Team

Comprehensive consultations have also been conducted by the social safeguard team and a total of 227 FGDs and 139 meetings have been held with the local communities in the project area. **Table 12.3** presents the salient information on these consultations.

Table 12.3: Consultation Meetings Conducted by Social Safeguard Team

District	Chainage	Upazila	Number of Consultation Meetings	Number of FGD's	Number of Case Studies
Sirajganj	00+400 To 37+4000	Kazipur	30	50	6
		Sirajgonj Sadar	16	30	
Bogra	37+400	Sonatola	4	21	6

District	Chainage	Upazila	Number of Consultation Meetings	Number of FGD's	Number of Case Studies
	To 80+000	Dhunut	4	18	
		Sariakandi	39	42	
Gaibandha	80+000 To 146+400	Fulchari	6	11	4
		Gaghata	10	5	
		Sundorgonj	3	8	
		Gaibandha Sadar	4	9	
Kurigram	146+400 To 181+400	Kurigram Sadar	6	8	4
		Chilmari	8	9	
		Nagesshari	4	10	
		Ulipur	5	6	
Total =			139	227	20

The key outcomes of the consultations have been summarized in **Table 12.4** below.

Table 12.4: Concerns and Expectations of Stakeholders

Primary Stakeholders	Concerns / Expectations
Women	Shelter during flood, health and sanitation, protection against flood and river bank erosion, security during flood situation, education and empowerment, awareness on early marriage and dowry
Day Laborers	Employment opportunities during project implementation, losing contact with peer group due to displacement, livelihood opportunities in resettlement sites, market in the resettlement villages, losing access to common resources (eg, fish)
Land owners	Protection from river bank erosion, proper evaluation of land, current market price of land, proper compensation, comparison of price of land to the river and countryside, compensation for structure and other assets.
Businessmen	Compensation for to loss of business, relocation of business structures
Community leaders	Protection from river bank erosion, ensure proper compensation of the affectees, ensuring compensation is paid before displacement, possibility of toll system on the road, proper information dissemination system for flood forecasting.

12.7. Summary of Issues Discussed

The summary of the issues raised and suggestions forwarded by the stakeholders during the consultations have been summarized in **Table 12.5** below. Also given in the table is the proposed action to address the concerns raised.

Table 12.5: Issues Raised and Plans to Address the Issues

Environmental and Social Aspects	Description of Views and or Concerns	Action Plan
Flooding and inundation	Frequency increasing, more areas inundated for a long period	The proposed interventions under RBIP will address these issues
Erosion	On varying scale river erosion destroys homestead and cultivable land	River bank protection is included in RBIP
Water logging	With dysfunctional regulators, water logging taking place, sometimes embankment obstructs flow of water, cultivation is hampered	Rehabilitation of existing and construction of new regulators is included in RBIP
Crop destruction	Frequent flood destroys valuable crops	The proposed interventions under RBIP will address these issues
Flood and drought	Twin problems are taking place in some areas	The proposed interventions under RBIP will address these issues
Cultivation in low lying areas	There are many low lying areas not suitable for cultivation owing to water logging; Agriculture extension officials also opined that cropping intensity will increase through RBIP project	Rehabilitation of existing and construction of new regulators is included in RBIP
Blocked fish movement route and lack of fish cultivation	Inappropriate regulators, embankment, or lack of regulator affects fish migration route and its cultivation	Rehabilitation of existing and construction of new regulators is included in RBIP; Excavation of khals and beels is also needed (GoB needs to take it up under

Environmental and Social Aspects	Description of Views and or Concerns	Action Plan
		any future project)
Embankment design	Community believes proposed design in some areas would not be appropriate; flood of other rivers need attention to protect the area	River training suggested, slight modification of design such as distance between countryside and river changing; further interaction between the design team and local level water officials suggested; Floods due to Teesta, Dharla and Dudhkumar should also be considered in the design of RBIP (or any future project).
Connectivity of river and other bodies lost	A number of places cited connectivity severely disturbed	Rehabilitation of existing and construction of new regulators is included in RBIP
Land compensation mode	Proper compensation rates; early payment of compensation; compensation for all losses	A comprehensive RAP is under preparation.
Jamuna-Bangali riverbanks are moving towards each other	If it happens several thousand acres of land will be lost	Construction of embankment; riverbank protection proposed under RBIP
Promoting surface water irrigation	Ground water irrigation facing problem thus surface water irrigation preferred in some areas ; government officials in Water Board and Agricultural Extension also underlined such need	Dredging of canals and rivers suggested; internal chars and water channels deserve attention in this regard
Damaged regulators	Community people feel it is creating problem of water logging; Water Board, Agricultural Extension Officials feel above and also think fish migration affected	Taking up repairing
Inadequate regulators	Need for better fish migration, clear water	Rehabilitation of existing and construction of new regulators is included in

Environmental and Social Aspects	Description of Views and or Concerns	Action Plan
	logging and irrigation	RBIP
Regulator maintenance	Inappropriate operation and inadequate maintenance of regulators can undermine the very objectives of these structures	Appropriate O&M procedures and mechanism will be prepared and implemented as part of the RBIP.
Flooding from Bangali river	Jamuna river flows are hindered because of embankment and other obstructions, nowadays Bangali spill over on its two banks creating flood	BWDB needs to address this issue under any future project.
Ensuring continuities in social life	Those who will be affected are concerned about the consequence of several discontinuities, school, clinic, social network	Resettlement planning to address these issues.
Livelihood activities dislocation	Uncertainties about the livelihood opportunities in the new places	Resettlement planning to address these issues.
Making up dislocation cost and proper resettlement planning	Affected people will lose asset, infrastructure; fishermen will not be to carry out fishing during construction period	Resettlement planning to address these issues.
Water and air pollution	Local communities could be adversely affected by such pollution	EMP will include measures to minimize such impacts. Monitoring will also be carried out.
Priority area setting	Water Board officials at Gaibandha point out the extreme flooding vulnerability of some areas, also opined priority zone selection	BWDB to pursue the BRE rehabilitation on urgent basis.
Charland attention	Permanent chars need attention to ensure wellbeing of the people living out there	RAP and SAP to include area uplift measures including livelihood opportunities and skill development.

12.8. Disclosure Requirements

The draft EIA will be shared with the stakeholders during a national workshop. Once finalized, the EIA will be submitted to the DoE for their review and clearance. The EIA will be available on the BWDB website and will also be sent to the WB InfoShop.

13. References

- A. U. Ahmed, M. M. Mirza, Q. K. Ahmed, A. K. Chowdhury, Azad, S. H. Imam, M. Sarker, & (Eds.) (Eds.), Perspectives on Flood 1998 (pp. 67-84). Dhaka: University Press Limited.
- ADB, 2007. Bank Protection and Fisheries at JMREMP; Jamuna-Meghna River Erosion Mitigation Project, Special Report.
- ADB 2002. Jamuna-Meghna River Erosion Project Document. RRP-BAN-34038-ADB, Asian Development Bank.
- Ahmed, A. U., & Mirza, M. M., 2000. Review of causes and Dimensions of floods with Particular Reference to Flood '98: National Perspectives.
- Ahmed, A.T.A., Kabir, S.M.H., Ahmad, M., Ahmed, Z.U., Begum, Z.N.T., Hassan M.A. and Khondker, M. (eds.) 2009.
- Ali, M. M. and M. A. Bhuiyan. 2006. Investigation on plan-form changes of the Jamuna River.
- amardesh.com/zila_kurigram.php, amardesh.com/zila_gaibandha.php
- Arthington AH, Balcombe SR. 2011. Extreme hydrologic variability and the boom and bust ecology of fish in arid-zone floodplain rivers: a case study with implications for environmental flows, conservation and management. *Ecohydrology* (2011): DOI: 10.1002/eco.221.
- Asian Development Bank. October 2002.
- Asian Waterfowl Census (2008-2010), Wetland International.
- Assessing current status of the Black-bellied Tern in Padma-Jamuna River Bangladesh, 2013. Bangladesh Bird Club.
- Bashir, T., Khan, A., Gautam, P. and Behera, S.K. 2010. Abundance and Prey Availability Assessment of Ganges River Dolphin (*Platanista gangetica gangetica*) in a Stretch of Upper Ganges River, India. *Aquatic Mammals*, 36(1), 19-26.
- Bates, B.C., Z.W. Kundzewicz, S. Wu and J.P. Palutikof, Eds., 2008: Climate Change and Water. Technical Paper of the Intergovernmental Panel on Climate Change, IPCC Secretariat, Geneva, 210 pp.
- BBA (2010), Ecology Report, Environmental Assessment of Padma Multipurpose Bridge Design Project.
- BBS (2007), Economic Census 2001 & 2003, Zila Series, Zila: Gaibandha, Ministry of Planning, GOB,
- BBS (2007), Economic Census 2001 & 2003, Zila Series, Zila: Kurigram, Ministry of Planning, GOB,
- BBS (2011), Census of Agriculture 2008, Gaibandha Series, Ministry of Planning, GOB; BBS(2007),
- BBS (2011), Census of Agriculture 2008, Kurigram Series, Ministry of Planning, GOB.
- BBS (2011), Census of Agriculture 2008, Zila Series Gaibandha, Ministry of Planning, GOB,

- BBS (2011), District Statistics 2011, Bogra, Ministry of Planning, GOB,
- BBS (2011), District Statistics 2011, Sirajganj, Ministry of Planning, GOB,
- BBS (2013), District Statistics 2011, Sirajganj and Bogra, Ministry of Planning, GOB;
BBS (2013), District Statistics 2011, Sirajganj and Bogra Ministry of Planning, GOB.
- BBS (2014), Statistical Pocketbook Bangladesh 2013, Ministry of Planning, GOB
- BWDB, 2014. Feasibility Study of Capital Dredging and Sustainable River Management in Bangladesh, draft final report. Bangladesh Water Development Board, Dhaka, Bangladesh.
- Bhuiyan, S.S., M. A. R . Joadder, and A.S.2 Bhuiyan 2008. Occurrence of fishes and non-fin fishes of the river Padma near Rajshahi, Bangladesh; Univ. j. zool. Rajshahi Univ. Vol. 27, 2008 pp. 99-100, ISSN 1023-6104. <http://journals.sfu.ca/bd/index.php/UJZRU>. Last access on 17/08/09.
- Biodiversity in the floodplain Ecosystem of Bera, Santhia, Sujanagar upazilas of Pabna District in Bangladesh. Department of Fisheries, GIZ and IUCN Bangladesh.
- Biswas, S. P. and Baruah, S. 2000. Ecology of river dolphin (*Platanista gangetica*) in the Upper Brahmaputra. *Hydrobiologia*, Vol: 430, pp. 97–111.
- BNBC 2006. Bangladesh National Building Code.
- Bose S. & Jalal A. (2010), Modern South Asia, History, Culture, Political Economy, Oxford India Paperbacks..
- Bose S. (1986), Agrarian Bengal: Economy, Social Structure and Politics, Cambridge University Press.
- CARINAM. 2010. Survey of the breeding population of gharials (*Gavialis gangeticus*) in Bangladesh. CARINAM Report No. 2010-MBZ/001. Interim project report submitted to The Mohamed bin Zayed Species Conservation Fund, Abu Dhabi. 23 pp.
- CARRINAM, (2012) Herpetological survey in Bera, Shanthia and Sujanagar Upazilla, Pabna. Report submitted to WBRP and GIZ. Herpetology Survey 2012-2013-CARINAM Bangladesh.
- CEGIS, 2006, Environmental and Social Impact Assessment of Integrated Water Resources Management in Chalan Beel Area including Beel Halti Development Project.
- CEGIS, 2009. Assessing the Extent of Erosion Behind East Guide Bund of Jamuna Bridge. Centre for Environmental and Geographic Information Services
- Census of Agriculture and Economic Census of 2001 & 2003, Zila Series Gaibandha, Ministry of Planning, GOB.
- Encyclopedia of Flora and Fauna of Bangladesh, Vol. 27: Mammals. Asiatic Society of Bangladesh, Dhaka, Bangladesh.
- FAP, 1996 and 1997. Flood Action Plan, Government of Bangladesh .
- FHRC, (2010). Water Bird Diversity and Population in Bera, Shanthia and Sujanagar Upazilla, Pabna. Report Submitted to GIZ and Wetland Biodiversity Rehabilitation Project.

FHRC, (2013). Biodiversity Impact Surveys- Birds, Dolphin, Herpetofauna and Tree in Bera, Shanthia and Sujanagar Upazilla. An interim Report Submitted to GIZ and Wetland Biodiversity Rehabilitation Project.

FHRC, (2013). Fish catch impact monitoring Surveys in Bera, Shanthia and Sujanagar Upazilla, Pabna. Report Submitted to GIZ and Wetland Biodiversity Rehabilitation Project.

Fichtner, 2014. Draft Technical Note Comparison of Alternative River Bank Protection Structures for RBIP.

Field-Based Research on the Impacts of Climate Change on Bangladesh Rivers. Dhaka: ADB,

First record of Red Phalarope *Phalaropus fulicarius* from Bangladesh by A.B.M. Sarwar Alam & Sayam U. Chwodhury Birding Asia 2013.

Fisheries Statistical Year Book, 2013. Department of Fisheries.

Forest Department and Wildlife Society of Bangladesh, 1991. Draft report on implementation of

FRSS, 2013. Fisheries Resource Survey System, Department of Fisheries, Gov. of Bangladesh.

Goodbred Jr., S.L., Kuehl, S.A., Stecler, M.S. and Sarker, M.H., 2003; Controls on facies distribution and stratigraphic preservation in the Ganges-Brahmaputra delta sequence, Sedimentary Geology, Vol. 155, 301-316.

Hasan, M.K., Khan, M.M.H. and Feeroz, M.M. 2014. Amphibians and Reptiles of Bangladesh - A Field Guide. Arannayk Foundation, Dhaka, Bangladesh.

Hassan, M. A. 2003. Diversity and conservation of wild plants and alien invasive species in Bangladesh. Concept Note on Bangladesh National Conservation Strategy and Action Plan. IUCN Bangladesh Country Office.

Hossain, A.N.H.A. (2006). The Impact of Floods on Bangladesh and Options for Mitigation An Overview, In Siddiqui, K. and Hossain, A.N.H. ed. Options for Flood Risk and Damage Reduction in Bangladesh, The University Press Limited, Dhaka, p.60

Hossain, M.A.R., Nahiduzzman, M., Sayeed, M.A., Azim, M.E., Wahab, M.A. and Lin, P.G. 2009. 2009. The Chalan beel in Bangladesh: Habitat and biodiversity degradation, and implications for future management. Lakes and Reservoirs: Research and Management, 14: 3-19.

Household Survey, 2014, RBIP

Hydraulic Profiling of Important Fish Habitats of the Jamuna River. Institute of Water and Flood Management (IWFM), Bangladesh University of Engineering and Technology.

IFC/ World Bank Group, 2007. Environmental, Health, and Safety (EHS) Guidelines. IFC/World Bank Group.

IPCC, 2007. Climate Change 2007: Synthesis Report. Contribution of Working Groups I, II and III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change [Core Writing Team, Pachauri, R.K and Reisinger, A. (eds.)]. IPCC, Geneva, Switzerland, 104 pp.

IPCC, Fifth Assessment Report, 2013

IPIECA/Energy Institute/Cedre 2004. IPIECA Report Series, Volume-12, “Guidelines for Oil Spill Waste Minimization and Management”.

IUCN-Bangladesh 2000. Red List of Threatened Animals of Bangladesh. IUCN-Bangladesh, Dhaka, Bangladesh.

IWM (Institute of Water Modeling). 2008. Hydrological Modeling for the Implication of Climate Change on Food Security of Bangladesh: A Menu of Adaptation Responses. Final Report. Dhaka, Bangladesh: Bangladesh Centre for Advance Studies, the World Bank.

Kabir, S.M.H., Ahmad, M., Ahmed, A.T.A., Rahman, A.K.A., Ahmed, Z.U., Begum, Z.N.T., Hassan, M.A. and Khondker, M. (eds.) 2009. Encyclopedia of Flora and Fauna of Bangladesh, Vol. 25: Amphibians and Reptiles. Asiatic Society of Bangladesh, Dhaka, Bangladesh.

Kasuya, T. and A. K. M. Aminul Haque. 1972. Some information on distribution and seasonal movement of Ganges dolphin. Sci. Rep. Whales Res. Inst. Vol: 24, pp. 109–115.

Khan, M.A.R. 1982. Wildlife of Bangladesh - A Checklist. University of Dhaka, Dhaka, Bangladesh.

Khan, M.A.R. 2010. Wildlife of Bangladesh - A Checklist with Bengali Names. Shahitya Prakash, Dhaka, Bangladesh.

Khan, M.M.H. 2008. Protected Areas of Bangladesh - A Guide to Wildlife. Nishorgo Program, Bangladesh Forest Dept., Dhaka, Bangladesh.

Khan, M.M.H. 2014. Introduction to the Wildlife of Bangladesh. Monitoring and Conservation of Wildlife in Kaptai National Park of Bangladesh - A sub-project of SRCWP Project of Bangladesh Forest Dept., Dhaka, Bangladesh.

Khan, M.S., Rahman, M.M. and Ali, M.A. (eds.) 2001. Red Data Book of Vascular Plants of Bangladesh. Bangladesh National Herbarium, Dhaka, Bangladesh.

Kostori, F.A., Parween, S. and Islam, M.N. 2011. Availability of small Indigenous Species (SIS) of Fish in the Chalan Beel: the largest wetland of Bangladesh. Univ. j. zool. Rajshahi Univ. 30: 67-72.

Kreb, D., & Budiono. 2005. Conservation management of small core areas: Key to survival of critically endangered population of Irrawaddy River dolphin *Orcaella brevirostris* in Indonesia. Oryx, 39, 178-188.

Krishi Diary 2014. Agriculture Information Service, Department of Agricultural Extension, Khamarbari, Farm gate, Dhaka.

Lasne E, Lek S, Laffaille P. 2007. Patterns in fish assemblages in the Loira floodplain: The role of hydrological connectivity and implications for conservation. Biological Conservation 139: 258-268.

Leigh C, Sheldon F, Kingsford RT, Arthington AH. 2010. Sequential floods drive ‘booms’ and wetland persistence in dryland rivers: a synthesis. Marine and Freshwater Research 61(8): 896–908.

March, 1997) Report. Wildlife Society of Bangladesh for Jamuna Multipurpose Bridge Authority

Mirza, M.M.Q. 1997. Hydrological changes in the Ganges system in Bangladesh in the post-Farakka period. University of Waikato. Hamilton, New Zealand.

MoEF, 1997. Environment Conservation Rules, 1997. Ministry of Environment and Forests.

MoEF, 2006. Noise Pollution Standards. 2006. Ministry of Environment and Forests.

Mohan, R. S. L., Dey, S. C., Bairagi, S. P. and Roy, S. 1997. On a survey of the Ganges River Dolphin, *Platanista gangetica* of the Brahmaputra river, Assam. J. Bombay Nat. Hist. Soc., Vol: 94, pp. 483–495.

MPO 1986. National Water Plan. Master Plan Organisation.

Mukherjee, N., & Khan, M. F. 2009. Factoring Climate Change Considerations in the Design of Padma Multipurpose Bridge. Consultancy Report Prepared by the Center for Environmental and Geographic Information Services (CEGIS). Bangladesh Bridge Authority, Dhaka.

NCSIP-1, 2001. Report on the Survey of Fauna, NCSIP-1. Ministry of Environment and Forests,

near the confluence. Downloaded from internet, no publication reference provided.

Nishat A., B. Nishat and M F A Khan, 2011. “A Strategic View of Land Management Planning in Bangladesh” by in ‘Flood Risk Science and Management’ edited by G. Pender and H. Faulkner, published by Blackwell Publishers Ltd, 2011

Nishat, A. (1993). 'Freshwater Wetlands in Bangladesh: status and issues'. In: Ainun Nishat, Z. Hussain, M.K. Roy & A. Karim (eds.), p: 9-21. IUCN-The World Conservation Union, Gland, Switzerland.

Nishat, A., Huq, S.M.I., Barua, S.P., Reza, A.H.M.A. and Khan, A.S.M. (eds.) 2002. Bio-ecological Zones of Bangladesh. IUCN-Bangladesh, Dhaka, Bangladesh.

Nishat, A., Hussain, Z., Roy, M.K. and Karim, A. (eds.) 1993. Freshwater Wetlands in Bangladesh: Issues and Approaches for Management. IUCN, Gland, Switzerland.

Nishat, B. 2014. “Influence of the Brahmaputra - beyond the basin and into the sea” in “Brahmaputra: Towards Unity” published by The third Pole, February 2014, Available online in, <http://www.thethirdpole.net/wp-content/uploads/2014/02/Brahmaputra-Towards-Unity1.pdf>

Nuruzzaman, A.K.M. (1997). (Draft Final Report), Towards Sustainable Development: The National Conservation Strategy of Bangladesh. NCS Implementation Project-1. Ministry of Environment and Forest, Dhaka.

Rahman R., N. Mukherjee, B. Nishat, M F A Khan and S. Ahmed, 2011. Monitoring protocol for hydro-meteorological observatories in Bangladesh’ in ‘Protocol for Monitoring of Impacts of Climate Change and Climate Variability in Bangladesh’ edited by A. Nishat. IUCN (International Union for Conservation of Nature)

Rahman, A.K.A. 2005. Freshwater Fishes of Bangladesh. 2nd edition, Zoological Society of Bangladesh, Department of Zoology, University of Dhaka-1000, 263p.

Raihan S., et. al. (2009), Access to Land and Other Natural Resources by the Rural Poor: The Case of Bangladesh, South Asian Network on Economic Modeling (SANEM), Department of Economics, University of Dhaka, Bangladesh.

Rahaman, M. M. and Varis, O. 2009. Integrated water management of the Brahmaputra basin: Perspectives and hope for regional development. *Natural Resources Forum*, 33: 60 – 75.

Rashid, S.M.A. and Swingland, I.R. (1997). On the Ecology of some freshwater turtles in Bangladesh. In: Van Abbema, J. (ed.). *Proceedings: Conservation, Restoration and Management of Tortoise and Turtles: An international Conference: American Museum of natural History*, New York, pp. 225-242.

River Dolphins in Bangladesh: Conservation and the Effects of Water Development.

Riverine Bird Project, 2014. Bangladesh Bird Club, 2013-14.

Rural population (percent of total population) in Bangladesh: <http://www.tradingeconomics.com/bangladesh/rural-population-percent-of-total-population-wb-data.html>

Sarkar, S. U. and Husain, L. (1996). Population, eco-biological status, captive propagation and conservation problems of *Lissemys punctata* in Bangladesh. In: B. Devaux (ed.) *Proceedings – International Congress of Chelonian Conservation*, 43-45 pp. Gonfaron, France: Editions SOPTOM.

Sarker M. 2009. Morphological Response of the Brahmaputra-Jamuna-Padma-Lower Meghna River to the Assam Earthquake of 1950. PhD thesis, University of Nottingham, UK.

Schedule-2, Rule 12, Environment Conservation Rules of 1997 (Page 3123, Bangladesh Gazette, 28 August 1997. Translated from Bengali.

Second Crop Diversification Project, DAE, Khamarbari, Dhaka. Annual Report 2013-14, Monitoring and Evaluation Section: Internal Outcome Survey, p – 45

Siddiqui, K.U., Islam, M.A., Kabir, S.M.H., Ahmad, M., Ahmed, A.T.A., Rahman, A.K.A., Haque, E.U., Ahmed, Z.U., Begum, Z.N.T., Hassan, M.A., Khondker, M. and Rahman M.M. (eds.) 2008. *Encyclopedia of Flora and Fauna of Bangladesh*, Vol. 26: Birds. Asiatic Society of Bangladesh, Dhaka, Bangladesh.

Smith, B. D. and Reeves, R.R. 2000. Survey methods for population assessment of Asian river dolphins. In *Biology and Conservation of Freshwater Cetaceans in Asia*, Occasional Papers of the IUCN Species Survival Commission no. 23 (eds. R. R. Reeves, B. D. Smith and T. Kasuya), pp. 97-115. IUCN, Gland, Switzerland.

Smith, B.D. and Reeves, R.R. (eds.). 2000b. Report of the workshop on the effects of water development on river cetaceans in Asia, Rajendrapur, Bangladesh, 26-28 February 1997. Pages 15-21 In R.R. Reeves,

Smith, B.D., Haque, A.K.M. Aminul, Hossain, M.S. and Khan, A. 1998. River dolphins in Bangladesh: conservation and the effects of water development. *Environmental Management* 22(3):323-335.

Social Assessment of RBIP, 2014.

Status and distribution of Water Birds in the Jamuna River, Sirajganj, 2014. Jahangirnagar University.

Stocker, T.F., D. Qin, G.-K. Plattner, L.V. Alexander, S.K. Allen, N.L. Bindoff, F.-M. Bréon, J.A. Church, U. Cubasch, S. Emori, P. Forster, P. Friedlingstein, N. Gillett, J.M. Gregory, D.L. Hartmann, E. Jansen, B. Kirtman, R. Knutti, K. Krishna Kumar, P. Lemke,

J. Marotzke, V. Masson-Delmotte, G.A. Meehl, I.I. Mokhov, S. Piao, V. Ramaswamy, D. Randall, M. Rhein, M. Rojas, C. Sabine, D. Shindell, L.D. Talley, D.G. Vaughan and S.-P. Xie, 2013: Technical Summary. In: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.

Survey the critically endangered species – Gharials (*Gavialis gangeticus*) in the Padma, Teesta and Jamuna rivers. CARINAM Bangladesh

The Asiatic Society. (2006). [www.banglapedia.org](http://www.banglapedia.org/httpdocs/HT/C_0135.HTML). Retrieved September 28, 2014, from Banglapedia: http://www.banglapedia.org/httpdocs/HT/C_0135.HTML

The history of Bogra district dates back to 4th century BC, please see amardesh.com/zila_bogra.ph

The World Bank 2009. The updated poverty maps to help targeted policy intervention for poverty reduction. Link: <http://www.worldbank.org/en/news/press-release/2009/04/02/the-updated-poverty-maps-to-help-targeted-policy-intervention-for-poverty-reduction>

Uddin, M.J. 2002. The Agricultural Potentiality of Wetlands: A Case Study of the Chalan beel area of Bangladesh. Dhaka Univ. J. Biol. Sci. 11(2): 139-145.

Yang, Y. C. E., Ray P. A., Brown, C. M., Khalil, A. F. and Yu, W. H. 2014. Estimation of flood damage functions for river basin planning – A case study in Bangladesh. Natural Hazards, accepted.

Yang, Y. C. E., Wi, S. Ray P. A., Brown, C. M. and Khalil, A. F. 2014. Modeling water resources the Brahmaputra River under future climate and social uncertainties. in preparation

Wildlife Protection and Monitoring (Wildlife Study Team), 1996. Annual Report, 1996. Wildlife

Wildlife Protection and Monitoring (Wildlife Study Team), 1997. Ninth Quarterly (January-

Willoughby, N.G., M S M Chowdhury, M H Rashid & H K Ratan, 2004. Studies On Environmental Issues In Shrimp Polders; Results of a Baseline Study on Polder Benthos. Report no. 38.19 Part B, ARDMCS, FFP.

World Bank, 2010. Bangladesh Economics of Adaptation to Climate Change, August 23, 2010, Consultation Draft, The World Bank.

World Bank, 2009. Updating Poverty Maps of Bangladesh, The World Bank, Bangladesh Bureau of Statistics, World Food Program.

World Bank. 2005. *OP 4.10 – Indigenous People*. The World Bank Operational Manual. The World Bank. July 2005.

World Bank. 2003. *Social Analysis Sourcebook, Incorporating Social Dimensions into Bank-Supported Projects*. Social Development Department, The World Bank. December 2003.

World Bank. 2001. *OP 4.12 – Involuntary Resettlement*. The World Bank Operational Manual. The World Bank. December 2001.

World Bank. 2001. *OP 4.04 – Natural Habitat*. The World Bank Operational Manual. The World Bank. June 2001.

World Bank. 1999. *OP 4.01 – Environmental Assessment*. The World Bank Operational Manual. The World Bank. January 1999.

World Bank. 1994. *OP 7.60 – Projects in Disputed Areas*. The World Bank Operational Manual. The World Bank. November 1994.

Zellweger, Hannes, 2007. Geotextile Bags for River Erosion Control in Bangladesh, Under water behavior and environmental aspects.

Zug S. (2006), 'Monga – Seasonal Food Insecurity in Bangladesh – Bringing the Information Together' in Journal of Social Studies, No 111, July- Sept., p-2.

Zuo, Y. H, Liang, Y. and Bo Y. Z. 2008. Water Resources Management – The Analysis of “Greater Western Route Water Diversion Project,” Science Publisher, Beijing China, pp202.

Government of The People's Republic of Bangladesh

Ministry of Water Resources

Bangladesh Water Development Board



**Environmental Impact Assessment (EIA)
(Draft)**

Volume II (Annexes)

River Bank Improvement Program (RBIP)

January 2015

Contents

Annex A: Study Methodology

Annex B: Terms of Reference of Study

Annex C: Location and Specification of Different Fish Habitats and Chars

Annex D: Tree Plantation Plan

Annex E: ToR of Consulting Services for Preparation of Biodiversity Management Plan and Implementation of RBIP Monitoring Program

Annex F: List of Khals and Beels with Recommended Improvements

Annex G: Emission Factors

Annex H: Environmental Codes of Practice

Annex I: ToR for External Environmental Monitoring.

Annex A. Study Methodology

Citation in the main text (Volume I): **Section 1.4.**

The present EIA has been prepared following the standard methodology consisting of the steps listed below.

- Review of the program details and meeting/discussions with the design team
- Review of the policy and regulatory requirements
- Reconnaissance field visit and initial scoping and screening
- Collecting and analysis of baseline environmental and social data with the help of secondary literature review and field data collection
- Consultations with the stakeholders including beneficiary/affected communities
- Impact assessment
- Preparing environmental management plan
- Compilation of the present EIA.

These steps are discussed in the following sections.

A. 1. Review of the Program Details

At the outset of the study, detailed meetings were held with the main consultants (design team) in order to understand the project, its key components, the overall time schedule, and other relevant details. During these meetings, discussions were held regarding the need of close coordination among the various teams including the design team, social safeguard team, and the EIA team. It was agreed that the three teams will make efforts to hold fortnightly if not weekly meetings to ensure close coordination as well as sharing of information among the teams. Subsequent to this, all the necessary reports, documents, and maps were obtained from the design team. The EIA team reviewed these documents and held additional meetings with the design team to seek clarifications and further information on various aspects of the project.

A meeting was also held with the WB's environment specialists to discuss the understanding of the project, depth and breadth of the environment assessment, and the overall study schedule.

Initial scoping of the EIA study was also carried out at this stage and plans were made for the reconnaissance site visit.

A. 2. Reconnaissance Field Visit

A reconnaissance field visit was organized from 13 to 16 July to have a first-hand idea about the project, its components and its probable impacts on the local environment and community. Mr. Mohammad Omar Khalid, independent environment specialist was accompanied by Dr. Istiak Sobhan, EMP specialist and Md. Sunil Boron Debroy, Hydrologist and two field staff of IUCN. From the main consultant team, Mr. Habibur Rahman, Deputy Team Leader led the team in the field. During the reconnaissance visit, the team also visited 13 proposed resettlement sites for an initial environmental screening. Some photographs showing the project area are presented in **Figure A.1** below.



(a)



(b)



(c)



(d)

Figure A.1: Present condition of project site (a) Baliaghugri existing embankment, Changacha union of Sirajganj (b); Pukuria Bhandarbari existing embankment in Goshaibari, Dhunat, Bogra; (c) Per Debdanga Fishpass, Sariakandi Bogra; (d) Erosion of Brahmaputra river bank in Kurigram Sadar

A. 3. Inception Report

Subsequent to the reconnaissance field visit, the Inception Report was prepared that included detailed methodologies particularly for the field data collection. The table of content of the Inception Report is given below.

1. Introduction
1.1 Project Background (Assignment background)
1.2 The objectives of the study are to:
1.3 Scope of study
1.4 Scope of Inception Report
1.5 Inception Period Activities
1.5.1 Initiation
1.5.2 Resource Mobilization
1.5.3 Reconnaissance field visit
1.5.3 Inter Agency Coordination
1.6. Understanding of the Project
1.6.1 Background
1.6.2 Study Area

1.6.3 Objectives of the project	
1.6.4 Task to be performed by Main Consultants	
1.6.5 Understanding physical Interventions of the Project	
1.6.6 Description of work Items	
2. Approach and methodology	
2.1 General Approach	
2.1.1 Environmental Management Framework	
2.1.2 Initial Environmental Evaluation and Environmental Impact Assessment	
2.1.3 Cumulative impacts Assessment	
2.1.4 Public Consultation and Stakeholders Workshops	
2.1.5 Environmental Management Plan	
2.2 Methodology	
2.2.1 Secondary Literature review	
2.2.2 Field Investigation	
3. Deliverables	
4. Team Composition, Assignment, and Key Expert's Input	
5. Work Plan and Staffing Schedule	
6. Data collection plan environmental assessment	
Annex 1. Environmental Screening Checklist	
Annex 2. Schedule for Field Data Collection	
Annex 3. List of important information about physical environment	
Annex 4: Air Quality and Noise Measurement Spot	
Annex 5: Survey Sheets for Ecological Study	
Annex 6: Fisheries catch assessment survey sheets	
Annex 7: Potential checklist of issues to be discussed during consultations by IUCN team	
Annex 8: Short description of project and TOR of the environmental assessment team	
Annex 9: Initial Environmental Screening of Resettlement Sites	

A. 4. Project Influence Area/Study Area

As an outcome of the initial scoping and the reconnaissance field visit discussed above, the project area off influence was determined, as described below.


The influence area of the project has been derived considering areas that are likely to be directly or indirectly affected by the RBIP construction and operation, including but not limited to: the extent the project would have an impact on the floodplain areas, lateral fish migration, hydrological network and road network, and the project footprints. The following criteria have been considered to define the influence area:

- Floodplain area: The extent of flood plain area that will be protected from the floods by the flood embankments (BRE) has been primarily considered as the project influence area. This area has been derived based on the latest satellite maps and GOB topographic maps through digital elevation model (DEM).
- Flood Inundation: The extent of flood inundation caused by breaches of BRE. Satellite maps were analyzed for August-September, 2014 to understand the extent of flooding from breaches and internal rivers like the Dharla, Dudhkumar, Teesta, Karotoya, Bengal, Ichamati and Hurasagar.
- Connectivity: The area is crisscrossed with a network of khals which carry flood waters from Jamuna to the internal rivers on the western side of the project area. The inundation area of the internal rivers was also considered during delineation

of influence area. On the other hand, all these rivers are interconnected by numerous khals, tributaries and distributaries forming a hydrological network in the entire north west region. For example, Mahananda, Punorbhaba which are major rivers of the north west region, are connected to the Atrai-Karatoya-Bengali system which drains to the lower Jamuna through the Hurasagar/Baral in the south east corner of the region.

- **Lateral Fish Migration:** Some fish species of Jamuna, such as major carps undergo lateral migration from Jamuna to floodplains for spawning. The migratory routes have been affected by the BRE and the proposed interventions also have a potential to impact these lateral migratory routes. The extent of lateral migration from Jamuna to floodplains is included in the project influence area. The other type of fish migration in Jamuna is longitudinal migration between upstream and downstream (e.g. hilsa migration from sea to Jamuna). Since the BRE and proposed interventions will not have any impacts on the longitudinal migratory routes, these areas are not included in the project influence area.
- **Road network:** Road network and other flow barrier structures have been considered. The western boundary of the influence area is thus the Dhaka-Bogra highway which impedes flood waters to flow westward. The southern boundary is defined as Jamuna bridge since it will be connected with the project road.
- **Significant Habitats (Eco-dynamic area):** There are many significant ecological habitats in the project area especially in the chars. The project will not have any impact on the chars. However, the nearest chars were also considered to be a part of the influence area.
- **Movement of inhabitants – resource harvest, communication, livelihoods.**
- **Project footprints:** Areas that are directly fall under foot prints of the projects, ancillary facilities, temporary construction areas and worker camp sites, borrow areas, access roads to the project facilities for transport of material, etc.; areas that will be affected by the emissions from construction and by operation of traffic; etc.

The Project influence area is shown in **Figure A.2** (next page).

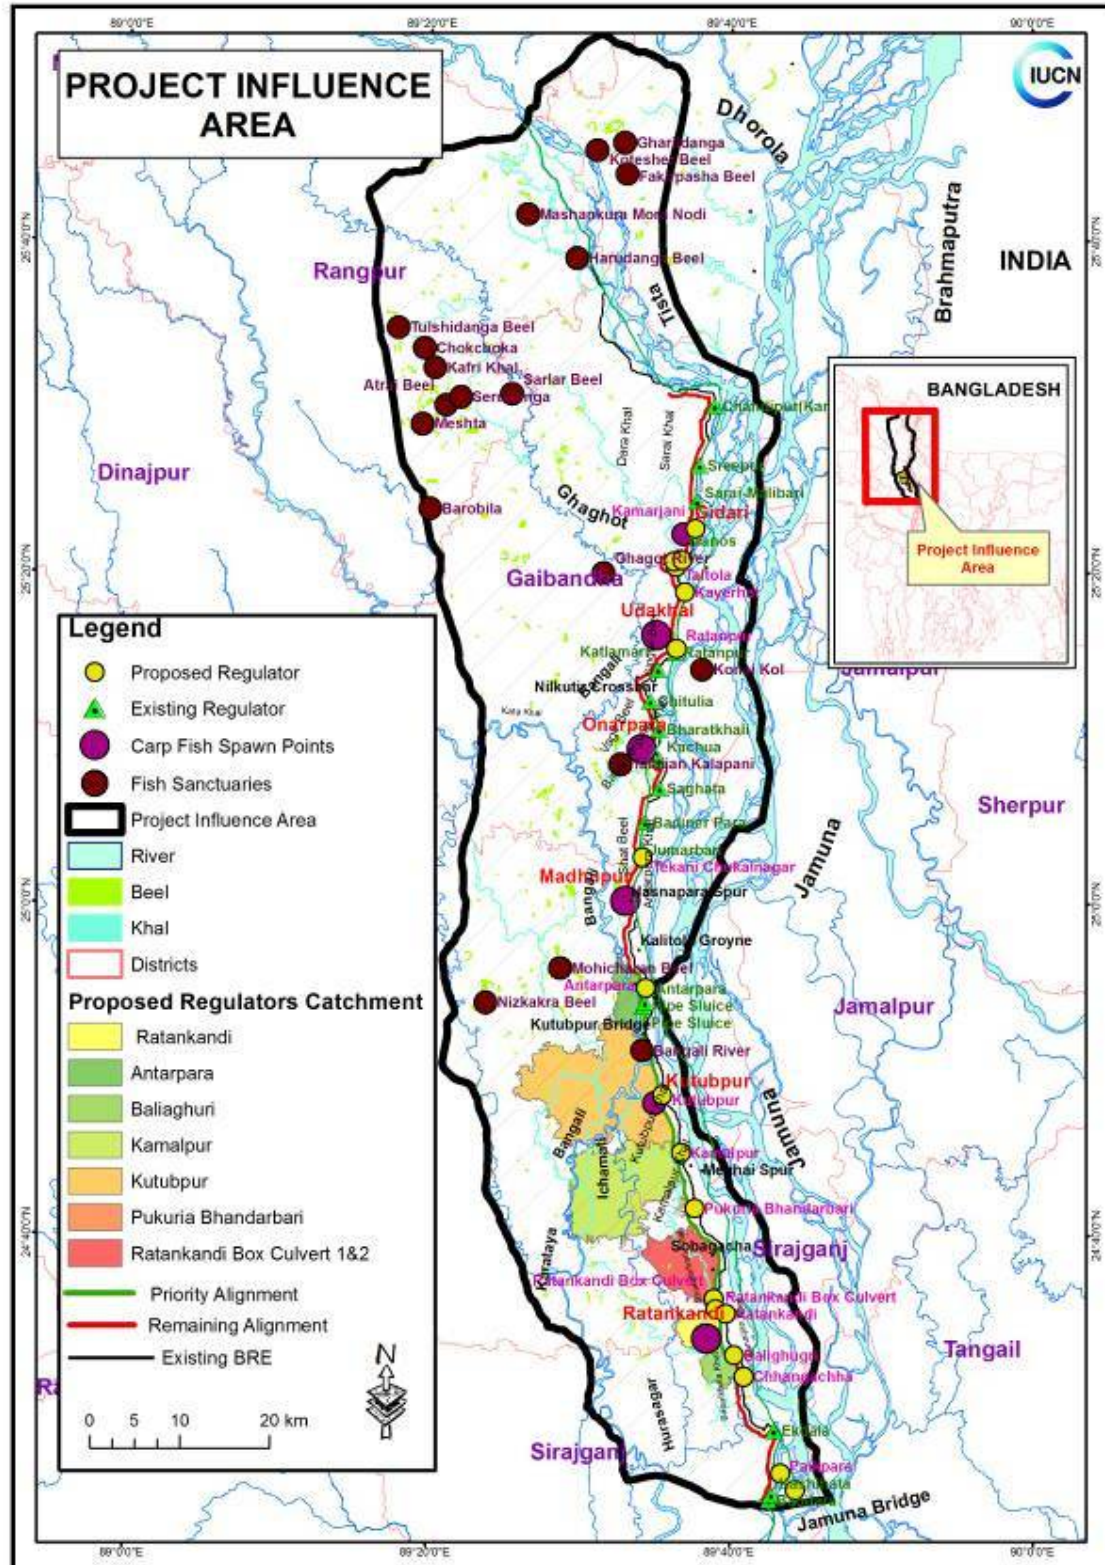

A. 5. General Approach for Baseline Data Collection

The baseline condition of the project area has been formulated on the basis of the information collected from secondary and primary data sources through literature review, field investigations and consultations with different stakeholders. The baseline has been established in respect of air quality, noise, river morphology, surface and ground water quality, settlements, agriculture, livestock, fisheries, forestry, ecology, terrestrial and aquatic flora and fauna, socio-economic and institutional condition. Primary data on water resources, air quality, noise, agriculture, livestock, fisheries, forestry, ecology, and terrestrial as well as aquatic flora and fauna has been collected by conducting an intensive field survey. Additional data and information has been collected through rapid rural appraisals (RRA), participatory rural appraisals (PRA), focus group discussions (FGD) and key informant interviews (KII).

Maps prepared by using GIS and Remote Sensing have been used in collection and development of baseline database. In this regard IUCN team coordinated with main consultant and their associates, such as CEGIS. The RS based GIS maps have been prepared and used in designing the traverse line surveys carried out the field work along the traverse lines. The field teams used appropriate survey instruments, e.g. checklists and semi-structured formats to record the information on different resources.

Secondary Literature review

All relevant secondary information was collected to describe the baseline of the environmental and ecological setup.

A. 6. Field Investigations

Field surveys have primarily been conducted by the field investigators with biology, fisheries and engineering background. They have been guided, monitored and supported by the senior specialists in the EIA team. The field team has collected field data using structured questionnaires in addition to FGD, PRA and KII.

The team has walked through the entire length of the RBIP¹ (182 km) and collected data from the proposed alignment of the embankment cum road and the nearest river channel from the right bank. The field investigations were carried out during September and October 2014. The field observations are included at the end of the Annex.

Soil Quality

To establish the baseline soil quality in the project area and to monitor future impacts, soil samples were collected near the proposed construction areas of the embankment and bank protection works. Seven sites are identified for soil sampling in a way to cover overall project area with adequate distribution. These locations Balighurghuri, Changacha union of Sirajganj, Pukuria Vandarbari and Anterpara of Bogra and analyzed various parameters such as pH, texture, total phosphorus, total Nitrogen, Total Potassium, Total Sulfur and Pesticide residue for quality. Locations of the sampling sites are shown in **Figure A.3**.

Air Quality

Ambient air quality has been measured in seven locations close to the proposed embankment alignment. The sampling sites are selected in a way to cover major towns where there is relatively high traffic and the areas dominated by agricultural lands where relatively there is no pollution sources. Two samples each in Sirajganj, Bogra and

¹ Length of total RBIP (including priority embankment and future embankment)

Kurigram districts. Air quality parameters proposed in national air quality standards are considered for sampling. Locations for the field data collection points are provided in **Figure A.3**.

Ambient Noise

Noise data has been collected from seven sites as the same location of air quality measurement. At each site, noise data has been recorded for two times-day and night. Locations for the field data collection points are provided in **Figure A.3**.

Water Resources

Surface Water. Data was collected on the general pattern of surface water distribution and major drainage patterns, including rivers, small waterways, **beels**, khals and flooded areas. FGD and public consultations were done at all sites to collect primary information and anecdotal data. In particular, the following information was collected from both primary data (Field Investigation) and secondary data:

- Drainage System (natural and artificial) and their distribution
- Seasonal changes in water level
- Seasonal changes in drainage
- Extent, periods of occurrence and causes of water logging
- Effects of existing infrastructure (roads, canals, building) on drainage
- Extent of interconnection
- River erosion
- River stages and discharges for standard return periods
- Water availability for irrigation

Secondary data was also collected on the hydrological cycle within the overall watershed encompassing the study area, giving mean, maximum and minimum discharges and water levels for all major (lotic) flowing water bodies including main rivers. Data on canal sources and also for lentic (standing) water bodies like **beels** were collected from field investigation. Information was also gathered on hydrological problems in study area are including; flooding (Flash floods and other types), water logging and inadequate drainage.

To understand the river water quality, historical record of water quality has been collected from the Department of Environment (DoE) at Teesta bridge, Jamuna bridge, downstream of Jamuna bridge near Jamuna Fertilizer Plant, and Nandina. Data of both dry and winter season has been collected.

During the field investigations, water samples were collected from surface water resources (rivers, beels) considering the connectivity of khals and location of proposed regulator. The parameters considered for water quality are: dissolved oxygen, biological oxygen demand, total dissolved solids, electrical conductivity, pH and temperature. Locations of these sampling sites are shown in **Figure A.3**. Details of sampling methods and results are given later in the Annex.

Ground water. Groundwater is the primary source of drinking in the project area. Ground water samples were collected from two tube wells, which are located upstream and downstream of the priority area. The groundwater samples have been tested against

drinking water standards (pH, chloride, iron, bicarbonate and total dissolved solids). Locations of groundwater sampling sites are shown in **Figure A.3**.

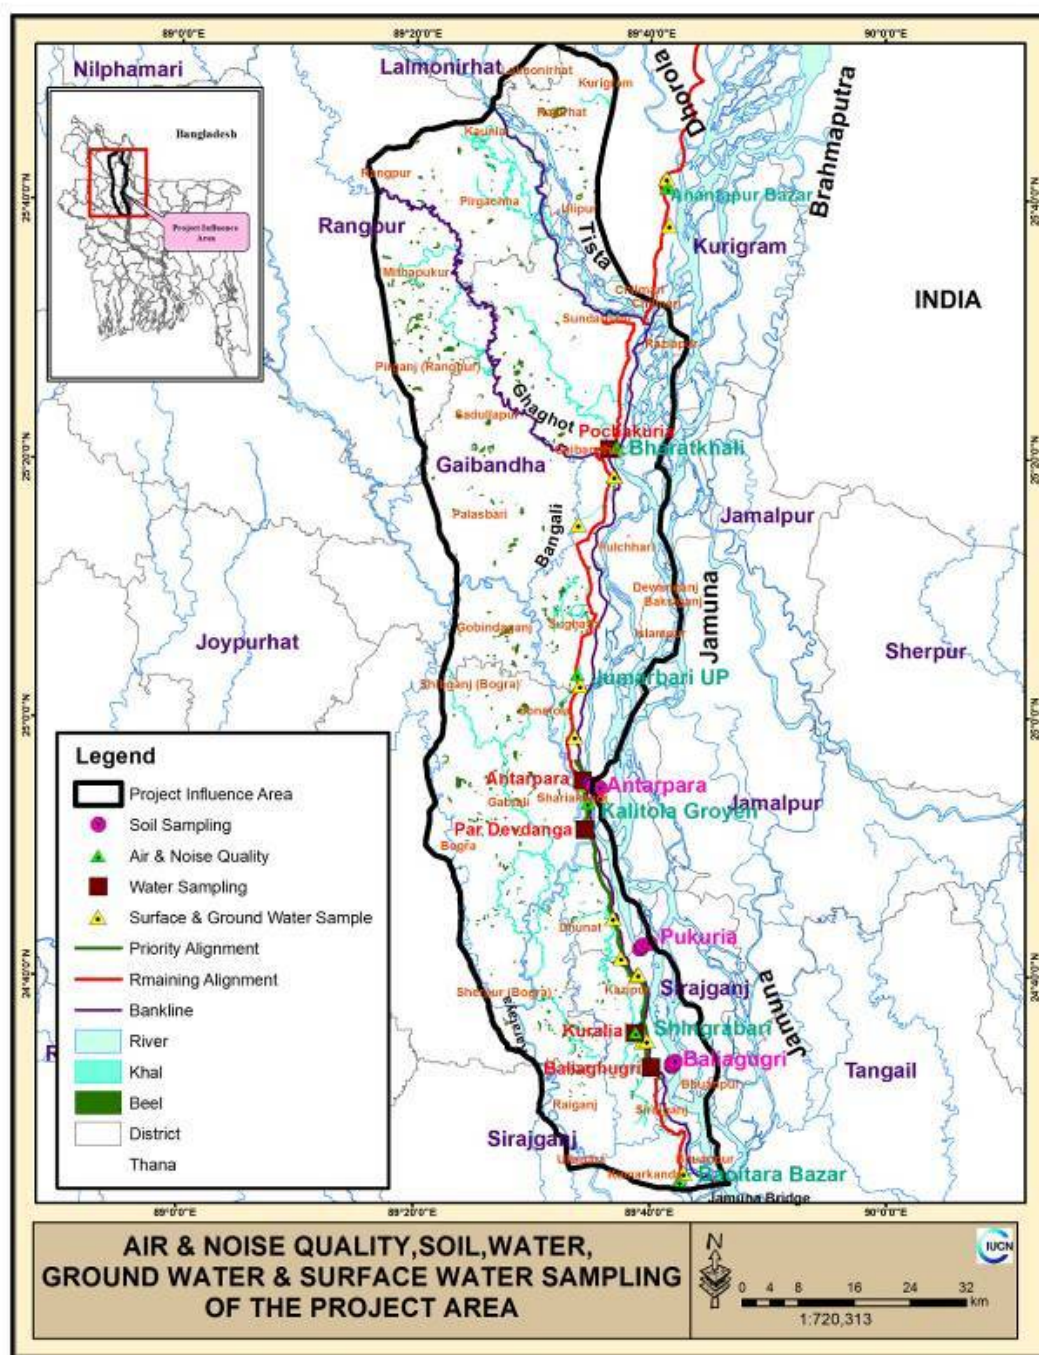


Figure A.3: Sites for Assessment of Air quality and Noise and sampling of Water and Soil

Ecology

Ecologically Sensitive Ecosystem. During the study, all sensitive ecosystems have been identified along the embankment alignment and into the river and nearby **charlands** (river islands or shoals). GPS locations have been collected for all ecologically important locations. All sensitive ecosystems have been mapped for the entire Area of Influence of the project. Questionnaires and data collection sheets for ecological field survey are provided in later in the Annex.

Terrestrial Environment. For development the baseline information of the terrestrial environment the following parameters have been collected by the field team:

- Terrestrial flora
 - General vegetation pattern on the site
 - Nearby homestead vegetation including major tree species according to their canopy cover (estimation of canopy cover percentage)
 - Information on plantation or orchards (if any)
 - Cropland and woodland (if any) and their landuse
 - Roadside vegetation
 - Grassland (if any in the vicinity) composition and their importance for wildlife especially avifauna
 - Fallow land (if any) why fallow and landuse and importance
 - Utilization
 - Wetland vegetation
 - Recent trends (whether increasing or decreasing, key prevailing threats)
- Terrestrial fauna
 - Terrestrial wildlife species and their importance and status
 - Identification of important wildlife habitats and their movement/migration pattern (especially for the wildlife that depends on the river for drinking and fishing, e.g. fishing cat)
 - Recent trends (whether increasing or decreasing, key prevailing threats)
- Biodiversity including terrestrial Species diversity
- Homestead vegetation

Aquatic Environment

The following data was collected on the wetlands and types of aquatic habitat in the project's Area of Influence:

- Aquatic flora
 - Ecology and plant community
 - Abundance and distribution
 - Growing period
 - Recent trends (whether increasing or decreasing, key prevailing threats)

- Utilization
- Recent trends (whether increasing or decreasing, key prevailing threats)
- Aquatic fauna
 - Aquatic wildlife species and their importance and status
 - Identification of their habitats, breeding and migration patterns in the project area
 - Wetland birds
 - Recent trends (whether increasing or decreasing, key prevailing threats)
 - Impact on aquatic wildlife from the project activity including short and long term impacts (impact from changed landuse, noise, human presence)
- Utilization
- Recent trends (whether increasing or decreasing, key prevailing threats)
- Biodiversity (including aquatic Species diversity and recent trends).

Floral Survey

Baseline scenario of floral species has been prepared with special emphasis on endangered and protected species. Classification of satellite images and reconnaissance field visit has been made to assess the various vegetation types / ecosystems present within the direct impact area and charlands near the project site. The major ecosystems found from the images have been visited and a species assessment has been made. Standardized transects were established in order to assess species composition and vegetation structure. Also, recent trends have been determined on the basis of field data, interviews, and literature review.

Charland Survey

Data collection on charlands (river islands) included Remote Sensing image analysis, vegetation and wildlife survey. Also, recent trends will be determined on the basis of field data, interviews, and literature review.

Faunal Survey

Mammals have been assessed on an opportunistic basis by all of the teams. The small mammals (eg, like Small Indian Mongoose, Short-nosed fruit bat) are easily observed during walk over surveys. Interviews have also been held with known “hunters” in the area to assess the presence of game species.

For the assessment of amphibian and reptile species diversity in the study area line transects and opportunistic surveys have been used. Amphibian transects were selected focusing on croplands, stagnant water, running water and bushy areas as typical habitats. Additional interviews have been conducted with local people using photographs of amphibians and reptiles to determine the presence of species. The surveys were carried out during both day (5:30am-6:30am) and night (6pm-9pm) times by the following methods.

Gangetic Dolphin. Line transects survey were carried out to determine the population size of the Dolphin in the project sites. The length of line transects was 1km and during survey team used a boat with a speed of 2 km. Surveys were conducted between 9.30 am and 11.30 am. Two observers scanned the water surface for the sign or dolphin, whereas

a third observer took notes by direct counting the species. All sightings were noted with GPS coordinates.

Gharial (*Gavialis gangeticus*), also known as the gavial, and the fish-eating crocodile, is a crocodilian of the family Gavialidae, native to the Indian Subcontinent. Although, the species is no longer have a viable population in the Jamuna river but it is still regarded as the most suitable habitat for this species. In last few years several juvenile has been captured by the fishermen. Anecdotal information was collected during interviews with the community about the presence and sighting of gharial. The probable habitats were also identified during the field investigations.

Birds including Migratory Birds. Birds have been assessed during walk-over surveys. Identification was done by both visual and vocal characteristics with added support from photographic evidence. The bird inventory has been linked to the vegetation / ecosystem types identified during the floristic survey. Interviews with the local villagers were held to find out the presence of migratory birds during winters. Further information on the migratory bird has been obtained through literature review.

Fish and Fisheries Resources

A fish and fisheries survey was carried out in the project influence area of the proposed RBIP to prepare a fisheries baseline of the study area and also to identify the important fishery components those need to be taken care of. At the initial stage the study, a baseline survey was conducted. The methodologies used are - direct field data collection and sighting, public consultation, secondary data analysis, focal points interview, market survey, fish catch assessment survey, application of remote sensing and GIS tools and extensive literature review. A logically designed fish catch assessment survey was carried out to identify fish biodiversity of the project study area. The survey conducted in 50km priority area was more intensive than that of the remaining 132km of the RBIP. The survey was conducted from 25 Aug to 15 Sep 2014 during the high flow season. A total of 33 FGD, 10 Catch Assessment Survey (of different gears), transect walk and in-situ observations were carried out during this period. Locations of FGDs and consultations carried out to collect baseline ecological data are presented in **Figure A.4**.

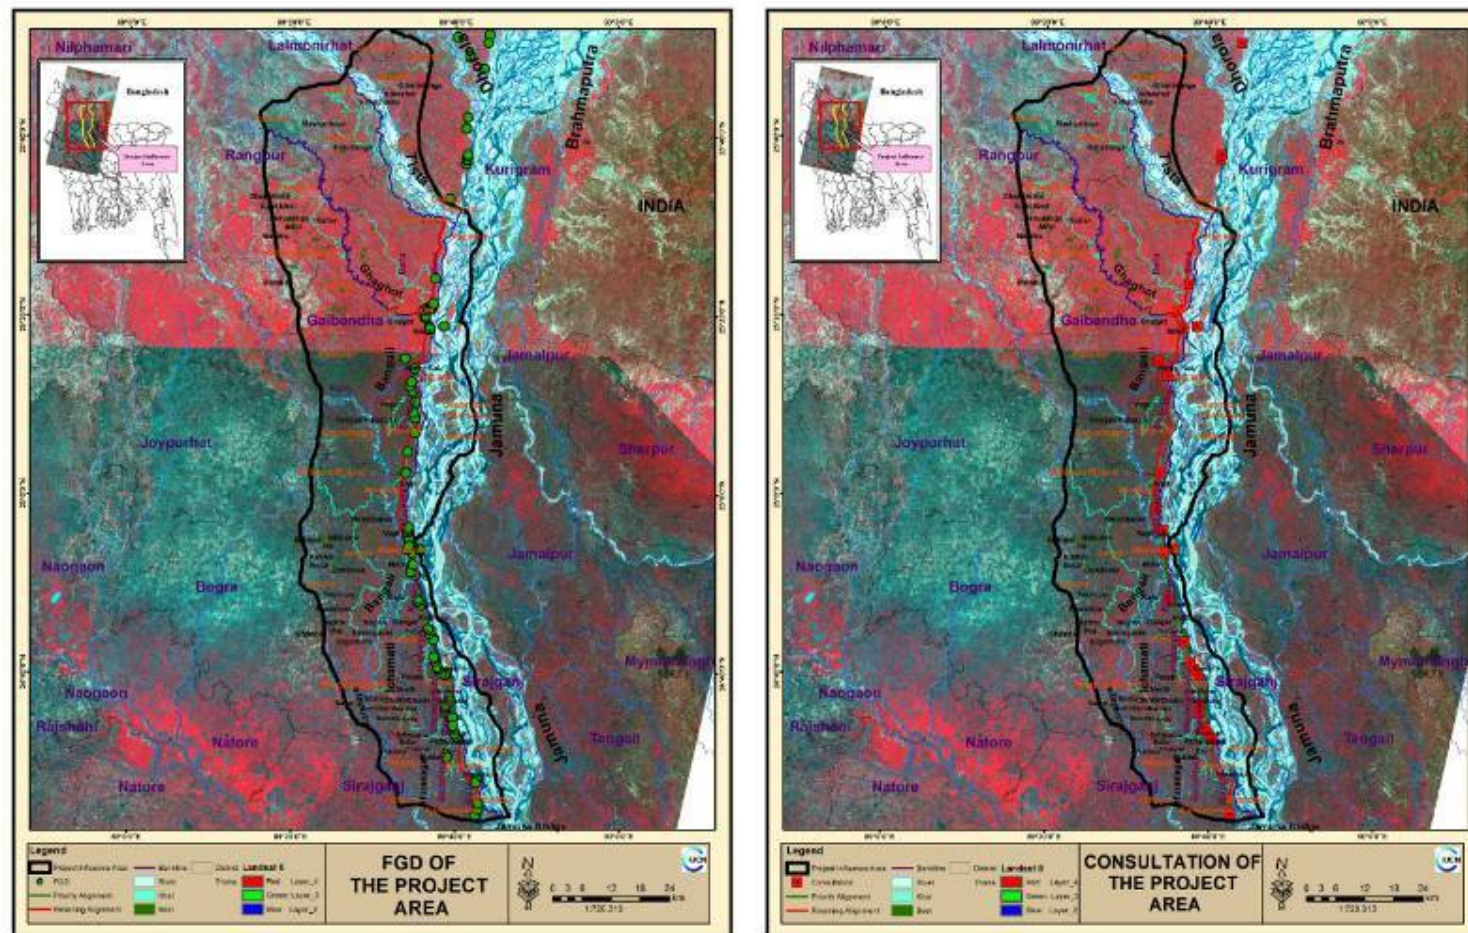


Figure A.4: Locations of FGDs and Consultations

Fisheries Survey

Survey methodology was selected on the basis of the reconnaissance survey outcome and various subsequent discussions held within the EIA team. Initial desk analysis was carried out to assess fish biodiversity and fisheries resource status. The survey was designed to fill up the knowledge gaps of the identified major fisheries resources. The key parameters of the survey are provided in the **Table A.1**.

Table A.1: Fish Survey Details

Parameters	Method	Sampling Site	Sampling Schedule
Species richness, Identification of pre-dominant indicator species those sensitive to the different constructions, Species composition, Biology of the indicator species, Fish production, Habitat analysis, Migration route/season, Breeding and feeding ground, Limnology, Fishing effort, Fishing Season	Catch assessment survey using different gears of fishermen, interview, FGD, market chain analysis, fishermen livelihood analysis, Area of conservation demarcation/GPS coordinating, Biodiversity analysis	Project Influence Area (1 Km buffer area from embankment location)	Year 2014: Aug-Sep

Site selection. Sampling sites were selected for each of the indicators by considering the characteristics of the sub-habitat types of the Jamuna river system, associated environmental factors, major fisheries characteristic, local knowledge, past and present scenarios, time and resource constraints. The study locations were selected after field visits and detail corresponding with the stakeholders of the project. Specific spots identified considering sampling strategies as per selected method. GPS readings were taken for each sampling spot. However, probable locations of the catch assessment survey were selected after a reconnaissance visit in the project area. In total, 20 sites along the 5 river cross sections at the distance interval of 10 km along the river and interval of 0.5 km across the river carried out within the **project influence area along the 50 Km of the Jamuna Right Bank for which EIA is being conducted (Figure A.5)**. In addition, catch assessment was carried out in another 5 locations of the connected canals of the right bank which are identified by local community as potential fish shelter grounds. Beside, a questionnaire survey was also carried out in different fishing village and among the associated stakeholders to collect the necessary fisheries information. The frequency for the remaining area was much lesser at an interval of 25 km along the proposed alignment of the embankment. The catch assessment survey also carried out for beels and khals.

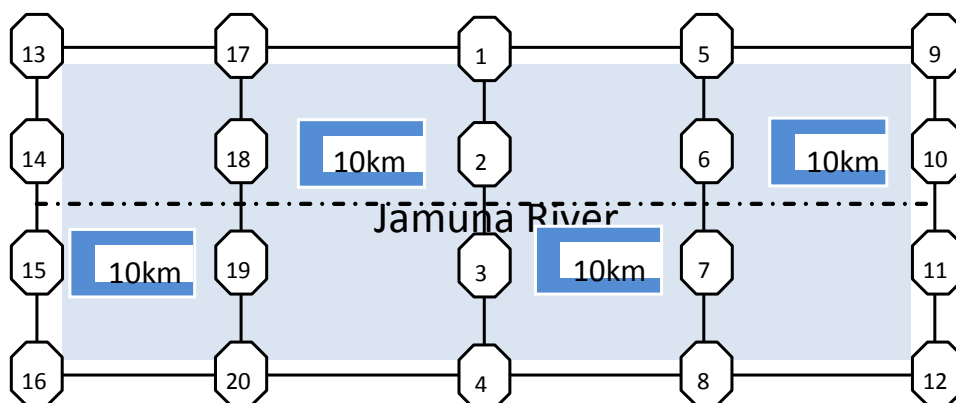


Figure A.5: Sampling Locations

Sampling materials. Specific depth and sampling time was recorded along with special information on weather condition e.g. sunny or rainy day. Local fishing gears and boats were used for catch assessment survey. Sampling times were recorded accordingly. Sorting, counting and identification of fishes were carried out in situ. Identification of the fish species has done by following standard literatures and FAO web tools for fish identification e.g. www.fishbase.org. Photographs of the identified fishes were collected giving unique code to identify at the later stage. Fish catch composition, total length, body weight, age, sex, were also collected in situ. A catch assessment survey sheet was used to record the collected data for each sample (provided at the end of the Annex). Different field equipment was used for sorting, identification and determination of the necessary measurements of captured fishes. Market survey was also carried out to compare the fish catch composition. FGD, market chain analysis and fishermen livelihood analysis has also been initiated this time using a checklist. Area of conservation significance i.e. fish breeding grounds were demarcated using GPS machine.

Fishing gears and traps. Set gill net, Drift gill net, Clap net, Cast net, Seine net and Lift net were used for sampling from different habitats of the study area. Range of the mesh sizes of the gears used were 0.4 inch to 2.5 inch. Length of gears was from 10m to 200m. Fishing depth was 1 to 6 meters. Besides, different types of locally made fishing traps were used for fishing the SIS (Small Indigenous Species) e.g. Dury, Chi, and Vaer.

Fishing craft. Fishing crafts those used for sampling were e.g. Kosha, Dingi, Chandi and Karki. Average length of the crafts was around 8-9 m.

Haul duration. Duration of fishing (haul) were different depend on the gears and crafts. However, average duration per haul was considered as 30 min.

Assessment techniques. The specific methodologies to collect fisheries data and information on the selected parameters and associated analysis are described below.

Catch assessment survey. Fish catch assessment survey is considered as a successful method which reflects the divergence of all the important fishery components. Catch assessment survey carried out through field sampling from the Jamuna River and its connected canals of the study area. Appropriate number of fish catch samples was collected from some pre-selected sites. Samples collected by using local available fishing gears for a specific duration to get the catch effort (catch/ haul) data. Catch composition, abundance of individual species, fish species diversity, total production and production rate assessed for each specific habitat. Fish migration channels demarcated by consulting with the local fishermen and historical catch location data analysis of the Jamuna River.

Breeding ground demarcation. Breeding ground demarcated using GPS machine by collecting the information from the local fishermen. Fry collectors interviewed to assess the overall status of breeding grounds.

Market survey. Local market surveys carried out to collect fish catch composition data. These data used to validate the field sampling catch composition and species diversity estimation through catch assessment survey. Market chain analysis will be carried out to identify the status of the fish fry collection and trading at different sites.

Key Informant interviews and focal group discussions. Selected key persons of the study area were interviewed to get real scenario of changes in fisheries and to collect information on the fisheries resources and fishermen status. KII results were used to validate the field sampling data more authentically. In addition, several FGD conducted at different fishing villages of the both banks and Chars (River Island) using a checklist.

Socio-economic Aspects

Data was collected on present demographic and socio-economic status, educational and cultural properties of the area, area vulnerabilities and development activities. Demographic and socio-economic status refers to a wide variety of parameters. This study particularly refers to population, community structures, employment and labor market, income and expenditure patterns of households, public health, education, vulnerabilities, values and customs. Most of the data was obtained from the social safeguard team in addition to the secondary resources.

Soil and Agriculture Resources

The production related data including soil resources were collected through secondary and primary sources. The secondary sources included: a) review and collection of data and documents available with other research teams of the RBIP like design, socio-economic; b) data and documents collected from the related organizations like DAE, BADC from the project area. The primary data were collected through: a) FGD (Focused Group Discussion), b) KII (Key Informant Interview), d) in-depth interview with potential farmers.

Review of Documents (Desk Review): Existing relevant documents available with the concerned organizations such as BWDB, DAE, BADC, BARI, and BRRI were collected and reviewed for having an initial idea and understanding of the crops and cropping of the areas. As part of project review, the environmental team attended workshop on RBIP organized by BWDB using national and international consultants.

Reconnaissance Field Visit cum Rapid Appraisal: After completion of the desk review, the consultant made a reconnaissance field visit to the embankment sites to further understand of the existing socio-economic conditions to identify the potential location for organizing the FGDs. The visiting team members made a Rapid Appraisal/Assessment on crop production scenarios through discussions with key stakeholders (BWDB staff, Local NGO officials, officials of Government service departments like DAE, BRRI, BARI, DLS, DoF pesticide/fertilizer Dealers, farmers) both at group and individual levels.

Focus Group Discussions (FGDs): Numbers of FGDs, one in each Upazila (11 total) were carried out using semi structured checklists outlined on the basis of the issues relevant to study objective and scope. The numbers of participants in each FGD were 10-15 farmers.

Key Informant interview (KII): During the field study numbers of open-ended KIIs were also conducted with representative stakeholders especially with the field staff of DAE using semi-structured checklist.

A. 7. Consultations

In accordance with the WB requirements, consultations have been carried out during the scoping/screening stage where the EIA ToR has been shared with the stakeholders. The second round of consultations will be carried out after compiling the draft EIA report. The VECs for the cumulative impact assessment and IESC for the overall impact assessment have been selected as a result and outcome of these consultations.

For consultations, various modes have been used including FDGs, KIIs, and workshops at district and upazilla levels. Consultations have been held with the local government institutions and community representatives, knowledgeable persons e.g. teachers, journalists and political leaders, and the affected community. The feedback has been useful in understanding the concerns and priorities of the stakeholders particularly the communities, assessing the potential impacts of the project, identifying the appropriate mitigation measures to address these impacts, and finalizing the EIA report.

A. 8. Impact Assessment Methodology

The significance of potential impacts was assessed using the risk assessment methodology that considers impact magnitude and sensitivity of receptors, described below.

Impact Magnitude

The potential impacts of the project have been categorized as major, moderate, minor or nominal based on consideration of the parameters such as: i) duration of the impact; ii) spatial extent of the impact; iii) reversibility; iv) likelihood; and v) legal standards and established professional criteria. These magnitude categories are defined in **Table A.2**.

Table A.2: Parameters for Determining Magnitude

Parameter	Major	Medium	Minor	Nominal
Duration of potential impact	Long term (more than 35 years)	Medium Term Lifespan of the project (5 to 15 years)	Limited to construction period	Temporary with no detectable potential impact
Spatial extent of the potential impact	Widespread far beyond project boundaries	Beyond immediate project components, site boundaries or local area	Within project boundary	Specific location within project component or site boundaries with no detectable potential impact
Reversibility of potential impacts	Potential impact is effectively permanent, requiring considerable intervention to return to baseline	Baseline requires a year or so with some interventions to return to baseline	Baseline returns naturally or with limited intervention within a few months	Baseline remains constant
Legal standards and	Breaches national standards and or	Complies with limits given in	Meets minimum national standard	Not applicable

Parameter	Major	Medium	Minor	Nominal
established professional criteria	international guidelines/obligations	national standards but breaches international lender guidelines in one or more parameters	limits or international guidelines	
Likelihood of potential impacts occurring	Occurs under typical operating or construction conditions (Certain)	Occurs under worst case (negative impact) or best case (positive impact) operating conditions (Likely)	Occurs under abnormal, exceptional or emergency conditions (occasional)	Unlikely to occur

Sensitivity of Receptor

The sensitivity of a receptor has been determined based on review of the population (including proximity / numbers / vulnerability) and presence of features on the site or the surrounding area. Each detailed assessment has defined sensitivity in relation to the topic. Criteria for determining receptor sensitivity of the Project's potential impacts are outlined in **Table A.3**.

Table A.3: Criteria for Determining Sensitivity

Sensitivity Determination	Definition
Very Severe	Vulnerable receptor with little or no capacity to absorb proposed changes or minimal opportunities for mitigation.
Severe	Vulnerable receptor with little or no capacity to absorb proposed changes or limited opportunities for mitigation.
Mild	Vulnerable receptor with some capacity to absorb proposed changes or moderate opportunities for mitigation
Low	Vulnerable receptor with good capacity to absorb proposed changes or/and good opportunities for mitigation

Assigning Significance

Following the determination of impact magnitude and sensitivity of the receiving environment or potential receptors, the significance of each potential impact has been established using the impact significance matrix shown below in **Table A.4**.

Table A.4: Significance of Impact Criteria

Magnitude of Impact	Sensitivity of Receptors			
	Very Severe	Severe	Mild	Low
Major	Critical	High	Moderate	Minimal
Medium	High	High	Moderate	Minimal
Minor	Moderate	Moderate	Low	Minimal
Nominal	Minimal	Minimal	Minimal	Minimal

Air Quality and Noise Measurement Spots



River Bank Improvement Program (RBIP) Environmental Study

Priority Zone (50 km)

Place	Upazila/Union	District
1.Sariakandi HP	Sariakandi	Bogra
2.Singrabari	Kajipur	Sirajganj
3.Ratankandi	Ratankandi	Sirajganj

Reaming Zone

1. Baoitara	Saidabad	Sirajganj
2.Jumarbari	Gaibandha Sadar	Gaibandha
3.Bharatkali	Saghatta	Gaibandha
4.Anantapur	Ulipur	Kurigram

Survey Sheets for Ecological Study

 River Bank Improvement Program Environmental Study		
Focused Group Discussion (Ecological Survey)		
SL. No.	Date:	Time:
VIII:	Mouza:	Union:
P.S.:	District:	No. of Participant:
GPS:		Photo:

Trees

Species Name	Use	Species Name	Use	Species Name	Use

Shrubs & Herbs

Species Name	Use	Species Name	Use	Species Name	Use

Wildlife

Species Name	Hunting/Poaching	Species Name	Hunting/Poaching	Species Name	Hunting/Poaching

Use : 1=food, 2=timber, 3=fuel, 4=medicinal, 5=fiber/hatching, 6=others
Hunting/Poaching: Y=Yes, N=No

Ecological Survey

Plot No.:	Date:	Time:
Vill:	Mouza:	Union:
P.S.:	District:	
GPS:		Photo:

Landform Pattern
Landform Element

ALP= Alluvial Plain FLO=Floodplain

100=Plain	101=Sandy Plain	102=Limestone Plain
103=Drainage Depression	104=Stream Channel	105=Flood out
106= Lake	107= Swamp	

Crop cover

0= Nil	1= 1-25%	2= <50%	3= 51%-100%

Crop characteristics

Surface Soil Texture

Sand	Loamy Sand	Clayey Sand
Sandy loam	Clay loam	Silty loam
Loam	Sandy Clay Loam	Silty Clay Loam
Peat	Clay	

Wild Animal Composition

Species Name	Microhabitat	Niche

Floral Species composition

[illegible]

Canopy Coverage

Wet land information

Types	Month (Wet)	Month (Dry)	Types	Month (Wet)	Month (Dry)
Permanent canal			Seasonal canal		
Permanent lakes			Seasonal/intermittent lakes		
Seasonal/intermittent ponds			Irrigated land and irrigation channels		
Riverine floodplains			Permanent pond		

GPS Location of Sensitive Receptor

[illegible]

Questionnaire for homestead vegetation survey

HHH Name:				Village:			
Sample No.		GPS Reading:	N:		E:		Date:
Homestead size (Decimal):				% of homestead covered with woods:			

[illegible]

Utilization : 1=food; 2=timber; 3=fuel; 4=medicinal; 5=fiber/hatching; 6=others
Ecological value : 1=for wildlife; 2= for avi-fauna; 3=for micro ecosystem
Flood susceptibility : 1=highly susceptible; 2=susceptible; 3=resistant

Questionnaire for homestead wildlife survey

HHH Name:				Village:			
Sample No.		GPS Reading:	N:	E:		Date:	
Homestead size (Decimal):				% of homestead covered with woods:			

[illegible]

- ¹ Habitat : 1=homestead forest, 2=flood plain, 3=wetland, 4=river
² Food habit : 1=herbivore, 2=carnivore, 3=both
³ Status : 1=very common; 2=common; 3=rare; 4=very rare
⁴ Migration status : 1=local; 2=local migratory; 3=migratory

Fisheries Catch Assessment Survey Sheets

Field Researcher:

Habitat Name:

Survey date:

Annex 1

Fisheries Catch Assessment Survey Sheet

Baseline Survey of the Jamuna RBIP Project

IUCN Bangladesh Country Office

Date:	Sample no.	Location:	GPS Reading:	N	E

Time	Riverbank distance	Meteorological setting @time of sampling	Gear Description	Craft Description	Duration of Haul	Total no. of haul/sample
		Sunshine:	Name & Type:	Name:		
		Part of day:	Mesh:	Length:		
		Wind speed:	Materials:	Fishermen no.:		
		Flow (m/s):	Length:	Made of:		
		Lunar date:	Depth of fishing:	Mechanized/non-mechanized:		
		Water quality:	Target species:	Type of boat (Commercial/non-commercial):		

[illegible]

Additional Comment/Constraints:	Research Assistant:	Signature:

Signature: _____

Field Researcher:

Habitat Name:

Survey date:

Annex 2: Fisheries Baseline Checklist

VIII: Mouza: Union: Upazila: District: BWDB Circle: BWDB Division:
Background Water bodies: Name: Alphabetic, Area: in Ha/% of area/Ana, Length: in km, Depth/Inundation depth: in Meter, Flood Duration: in Months, Production: metric ton

Problem/Issue	Fishing Effort	Habitat Type	Water Quality	Avg. Production	Production Trend (+/-) and Reason	List of Gears	% of gears	List of Habitat Name	Present					Past (15-20 yrs back)				
									Area	Length	Width	Depth	Duration	Area	Length	Width	Depth	Duration
Capture Fisheries: 1.	a. Total No. of fisher HHs:	River																
2.	b. %/No. of CFHHs:																	
3.																		
Culture Fisheries: 4.	c. %/No. of SFHHs:	Beel (Leased/non leased)																
5.	d. No. of Days spend annually in fishing by CFHHs:																	
6.																		
Indiscriminate Fishing Activities: 7.	SFHHs:	Khal																
8.	e. Hrs/Day spend in fishing by CFHHs:	Floodplain																
9.		Mangrove area																
		Fish pond																
	SFHHs:	Baor																
		Ghers																

Signature:

Field Researcher:				Habitat Name:						Survey date:					
Fish Migration				Fish Biodiversity		Species List					Species Composition				
						River	Khal	Beel	Pond	Other	Group	River	Khal	Beel	Pond
Previous Migration Status				Fish diversity status (Poor/Moderate/Rich) /%							Major carp				
											Exotic carp				
											Other carp				
											Catfish				
											Snakehead				
Present Obstacle to fish migration:	1.			Reasons of increase or decrease	1.						Live fish				
	2.				2.						Other fish				
	3.				3.						Shrimp/prawn				
					4.						Hilsa/Bombay duck/Indian salmon				
					5.						Pomfret				
Important breeding, feeding and over wintering ground				Significant areas	1.						Jew fish				
					2.							Sea cat fish			
					3.							Shark/Skates/Rays			
					4.							Rui			
					5.							Catla			
Horizontal Migration pattern	Species:	Season (Months):	Routes:	Significant areas	1.						Mrigal				
	2.										Koi				
	3.										Sarputi				
	4.										Large shrimp				
	5.										Small shrimp				
Vertical Migration Pattern	Species:	Season (Months):	Habitats:	Species of Conservation Significance	Rare:						Silver carp				
	1.										Carpio				
	2.										Grass carp				
	3.										Tengera				
	4.										Chapila				
5.					Unavailable:										

Signature: _____

Field Researcher:		Habitat Name:	Survey date:
Post Harvest Activities		Fishermen Lifestyle	
Fish edible quality:		Socio-economic Status of subsistence level fishermen:	
Source of pollution in each habitat:		Socio-economic Status of Commercial fishermen:	
Seasonal vulnerability:		Other conflict (with muscle men/ agriculture/ other sector/laws):	
Ice factory (Number, location and name):		Fishermen community structure (Traditional/Caste/Religion)	
Landing center, whole sale market, other district markets, etc.:		Traditional fishermen vulnerability (Occupation change/others):	
Storage facility (number, location and name):		Existing Fisheries Management	
Fish market (Number, location and name):		Fishermen Community Based Organizations (FCBOs):	
Marketing problems:		WMOs activity:	
Fish diseases (Name, Host species, Season, Syndrome, Reason, etc.):		Fishing right on existing fish habitats (Deprived/Ltd. access/Full access):	
Other backward and forward linkages (Number, location and name):		Leasing system:	
Transport facility (Mode of fish transportation, cost, other involvements)		Enforcement of fisheries regulation (Weak/strong):	
Dry fish industries (Number, location and name):		Department of Fisheries (DoF) activity:	
Others information:		NGOs activities:	

Note: 1. Major Carp - Rui, Catla, Mrigal, 2. Exotic Carp - Silver Carp, Common Carp, Mirror Carp, Grass Carp, 3. Other Carp - Ghania, Kalbasu, Kala, 4. Cat Fish - Rita, Boal, Pangas, Silon, Aor, Bacha, 5. Snake Head - Shol, Gazar, Taki, 6. Live Fish - Koi, Singhi, Magur, 7. Other Fish - Includes all other fishes except those mentioned above.
Marine: Hilsa/Ilish, Bombay Duck (*Harponodon nehereus*), Indian Salmon (*Polydactylus indicus*), Pomfret (*Rap_Hail_Foli Chanala*), Jew Fish (*Poa, Lambu, Kaladatina* etc.), Sea Cut Fish (*Tachysurus spp.*), Sharks, Skates & Rays, Other Marine Fish.

Breels: Rui (*Labeo rohita*), Catla (*Catla catla*), Mrigal (*Cirrhinus mrigala*), Kalbasu (*Labeo calbasu*), Gonia (*Labeo gonius*), Boal (*Wallago attu*), Air (*Mystus aor / Mystus seenghala*), Shol/Gazar (*Channa spp.*), Chital/Phali (*Notopterus chitala / N. notopterus*), Koi (*Anabas testudineus*), Singi/Magur (*Heteropneustes fossilis / Clarias batrachus*), Sarpunti (*Puntius sarana*), Large Shrimp (*Macrobrachium rosenbergii*), *M. malcomsonii*), Small Shrimp, Silver Carp (*Hypophthalmichthys molitrix*), Carpio (*Cyprinus carpio*), Grass Carp (*Ctenopharyngodon idellus*), Pabda (*Ompok pabda*), Punti (*Puntius spp.*), Tengra (*Mystus spp.*), Baim (*Mastacembelus spp.*), Chapila (*Gudusia chapra*), Others.

Pond: Rui (*Labeo rohita*), Catla (*Catla catla*), Mrigal (*Cirrhinus mrigala*), Kalbasu (*Labeo calbasu*), Mixed Carp, Silver Carp (*Hypophthalmichthys molitrix*), Grass Carp (*Ctenopharyngodon idellus*), Mirror Carp (*Cyprinus carpio var. specularis*), Tilapia (*Oreochromis mossambicus / O. niloticus*), Shrimp, Aor (*Mystus aor / Mystus seenghala*), Boal (*Wallago attu*), Shol/Gazar & Taki (*Channa spp.*), Chital/Phali (*Notopterus chitala / N. notopterus*), Koi (*Anabas testudineus*), Singi/Magur (*Heteropneustes fossilis / Clarias batrachus*), Sarpunti (*Puntius sarana*), Thai Sarpunti (*Puntius gonionotus*), Punti (*Puntius spp.*), Others.

Signature: _____

Annex B. Terms of Reference of EIA Study

Citation in the main text (Volume I): **Section 1.4.**

1. Background

Bangladesh is mainly comprised of the fertile alluvial floodplains and the delta of the Ganges-Brahmaputra-Meghna river system (Brahmaputra south through Bangladesh, named as the Jamuna). These three rivers combine within the country to form the world's third largest river, the Lower Meghna, which drains into the Bay of Bengal via a constantly changing network of estuaries and tidal creeks. Bangladesh is one of the most vulnerable countries to natural disasters, mainly by upstream river floods during monsoon season and coastal cyclones from the Bay of Bengal. Floods are of recurring phenomena in Bangladesh, and in each year about 22 percent of the country is inundated. Major floods occur when upland flood flows of the three rivers converging to Bangladesh coincide and combine with the heavy monsoon rainfall. It is also difficult to regulate these flood flows as over 90 percent of their river catchments areas are outside the Bangladesh.

Brahmaputra is the largest of the three rivers with highest erosion and bank movements. Prior to the construction of Brahmaputra Right Embankment (BRE), over bank spills along the 220 km stretch of the right bank of the Brahmaputra River used to cause flooding on an area of about 240,000 ha. In early 1960s, the BRE was built to protect from this flooding problem and to foster agricultural growth in the protected area. The original BRE had a setback of about 1.5 km from the Brahmaputra's right bank and it was allowed to have bank erosion life of 25-30 year span. In the 1970s the embankment started to fall under sporadic erosion attacks. During 1980s, the frequency of the BRE breaches by erosion increased rapidly as longer sections came within the range of rapidly eroding river bends which could cause bank-line erosion rates of several hundred meters per year in early stages of bend formation. To prevent flooding, these breaches were typically closed by local BRE retirements at about 200 meter set-backs. As a result of this minimal set-back distance the BRE has been retired several times in many places and at present perhaps only 50 KM of the original BRE has remained in place. Currently, many long stretches of the BRE are very close to the river-bank line. Hence when embankment is breached at many places it is often left open as closing of such breaching is becoming impossible. Consequently, security of area protected by the BRE has been seriously threatened and large areas of land and cities with large population like Sirajganj are exposed to flooding.

Under Flood Action Program a Master Plan was prepared in 1993 (River Training Studies of the Brahmaputra River, 1993) for improving the performance of BRE that preparing a revamping program to be implemented over a period of 30 years with identified priority investments in phasing. Based on these studies several hard points were identified and river bank protection revetments were constructed at Sirajganj, Sariakandi, Mathurapar and Kalitola and the embankment sections were improved. These protection works have performed very well in keeping the BRE anchored without much ongoing maintenance. The proposed consulting services are for the Environmental Assessment for the revamping plan for BRE (220 KM) starting from Nagarbari to the upstream point of BRE via Sirajganj Kazipur.

The main focus of the BRE rehabilitation work is on its length alongside the Brahmaputra/Jamuna River from Bangabandhu (Jamuna) Bridge to the Teesta River (Appendix A). The task needs to consider inclusion of the flood protection embankment of the Kurigram Irrigation Project alongside the Brahmaputra River. The priority works will cover the approximately 50-kilometre long priority reach from Sailabari to Hasnapara. This reach has the highest historic erosion rates.

The project may also include the option of a toll road (highway) associated with the flood embankment. The project's physical works will include:

- River bank protection on portions of the western(right) bank;
- Embankment upgrading, reconstruction and realignment , including adding drainage/control
- structures (regulators);
- A new road on the embankment, along with a new bridge crossing of the Teesta.

The project may also provide livelihood and resettlement support to the displaced people. Based on the field reconnaissance and the preliminary morphological assessment, the project works has been divided into two phases:

Reach	Length (km)	Phase
Jamuna Bridge to Sailabari	19	Remaining
Sailabari to Hasnapara	50	Priority
Hasnapara to Belka	77	Remaining
Upstream of Teesta River	36	Remaining
Total	182	

The proposed project will be financed by IDA with GoB contribution and the project has to comply with the policies and legislative requirement of the World Bank and the GoB. Proper environmental management will require ensuring that the project would be environmentally sound and sustainable, and thus decision making will take place. It is envisaged that the detail Environment Impact Assessment (EIA) along with Environmental Management Plan (EMP) needs to be developed for priority phase. The borrower is responsible for carrying out these activities. The project is expected to be classified as Category 'A' project in accordance Bank's policy. BWDB intends to hire a consulting firm (the Consultant) to carry out these environment activities of the proposed project at the preparation stage to ensure that the proposed infrastructure takes environmental concerns into account.

2. Objective

The objective of the assignment is to carry out the tasks related to environmental aspects in light of the TOR. These include preparation of the **Environmental Impact Assessment** (including EMP) of the priority phase (Sailabari to Hasnapara).

3. Scope of Services

Carry out an overall Environmental Assessment (EA) and prepare Environmental Management Plan (EMP) for the project area covered under the feasibility study. For the area covered under the detailed designs conduct detail Environmental Impact Assessment and prepare full Environmental Management Plan (EMP). EIA, and EMP would be prepared according to the World Bank Guidelines and Operational Policies and the GoB procedures. The Consultant shall familiarize themselves with the project details and components as well as the Consultant shall interact with other preparation consultants (i.e, design consultant, social consultant etc) to determine best way of conduction environment activities and fits into overall project preparation/project cycle. Consultant shall appropriately plan the timing of the deliverables.

The major activities to be carried out will include, but not limited to the following.

3.1 Environmental Impact Assessment of Priority Phase (Document owned by the Implementing Agency and Requirement of GoB and World Bank)

3.1.1 Study Area and Likely Major Impacts.

- i. Specify the boundaries of the study area for the assessment (project influence area): river basin/catchments, upstream land use, the drainage area and patterns, irrigation and other development scheme(s) – current and proposed, watersheds, access to sensitive/remote areas such as parks/ reserves/forests/agriculture land, elements of transport development program in the area.

3.1.2 Describe the proposed project.

- ii. Provide information on the following: location of all project-related development sites and general layout and extent of facilities at project-related development sites; flow diagrams of facilities/operations; design basis, size, capacity; pre-construction activities; construction activities (land clearing, land grading, worker camps, if any), schedule, staffing and support, facilities and services; operation and maintenance activities (water management, monitoring of flows and groundwater, etc), staffing and support, facilities and services; management of risks, including health and safety; life expectancy for major components. Components may include any or all of the following: embankment, structural control measures; river channel modifications, dikes and levees; overflow basins; floodways and drainage and nonstructural measures (eg, zoning, floodplain regulations, building and sanitary ordinances and regulation of land use in basin/watershed areas), road route(s), types, ROWs, adjustments to alignments, including earthworks; repair/replacement of bridges; widening and stabilization of embankments; improvements to drainage and service ducts; sources of materials used during proposed road works; generation of wastes and their disposal expected volume of use and traffic impacts; necessary rehabilitation activities resettlement, land acquisition and temporary re-routing of traffic, safety features; staffing and accommodation of employees, including site clearance, scheduling of project activities; road paving and road signs and markings; operation and maintenance activities (eg, clearing of ditches, prevention of erosion, especially at culverts).
- iii. Provide maps at appropriate scales to illustrate the general setting of project-related development sites, as well as surrounding areas likely to be environmentally affected. These maps shall include topographic contours, as available, as well as locations of major surface waters, roads, villages/towns, parks and reserves, and political boundaries. Also provide, as available, maps to illustrate existing land uses.

3.1.3 Description of the Environment

- iv. Assemble and evaluate and baseline data on the environmental characteristics of the study area, including river basin/watershed, site of embankment, inundation, floodplain and biological features (habitats and rare species, fisheries), floodplain (recession) agriculture. Include information on any changes anticipated before the project commences.
 - (a). Physical environment: geology, topography, soils, climate, surface and ground water hydrology, annual peak discharge, ambient air quality; recurrence intervals of various peak discharges and peak stages of various discharges), erosion and sediment loading, existing/projected pollution discharges and receiving water quality; instances of flooding, siltation/erosion;
 - (b) Biological environment: ecology: flora and fauna, including rare or endangered species; sensitive natural habitats, including parks and reserves; potential vectors for disease; exotics and aquatic weeds; application of pesticides and fertilizers (current and projected as agriculture production is expected to be increased);

(c) Socio-cultural environment: land use (including current crops and cropping patterns - terracing or contour planting, population in the floodplain, etc.); fisheries and farm/industrial outputs and inputs; transportation; land tenure and land titling; present water supply and water uses (including current distribution of water resources); control over allocation of resource use rights; water-related human health problems; cultural sites, present and projected population; present land use/ownership; planned development activities; community structure; present and projected employment by industrial category; distribution of income, goods and services; recreation; public health; cultural properties; indigenous peoples, customs and aspirations; significant natural, cultural or historic sites, etc. Presence of HIV/AIDS and other sexually transmitted diseases;

(d) If resettlement sites and livelihood options are considered to support, find the physical, biological and socio economic conditions of the area;

- v. Provide chainage wise information along the two sides of the project intervention and identify any critical aspect which needs special consideration during design, construction and operation.

3.1.4 Determination of the Potential Impacts of and Impacts on the Proposed Project.

- vi. This analysis will require in depth interpretation. In this analysis, distinguish between significant positive and negative impacts, direct and indirect impacts, and immediate and long-term impacts. Identify impacts that are unavoidable or irreversible. Wherever possible, describe impacts quantitatively, in terms of environmental costs and benefits. Assign economic values when feasible. Characterize the extent and quality of available data, explaining significant information deficiencies and any uncertainties associated with predictions of impact. Compare the impact with the baseline. Provide TORs for studies to obtain the missing information. Special attention should be given to:

(a). Effects of the flood control embankment: direct environmental impacts of the embankment construction; effects on fisheries resources (creation of a reservoir fisheries, loss of downstream fisheries); effects on water quantity and quality; effects on floodplain ecology and estuarine, river hydrology, if applicable;

(b). Effects of flood control structures, intervention of river training structure and measures (e.g., channelization measures, floodways (high flow diversions or spillways), overflow basins, disposal of dredging spoils) on: aquatic ecology, particularly fish resources; hydrology, including groundwater recharge and exclusion of water from certain areas that may impact the hydrology and associated wildlife and agriculture; water quality; plant and animal ecology of the floodplain (habitat and species); and,

(c). Socio-economic impacts on populations in inundation area and downstream (floodplain dwellers, urban population, etc.) through: land use changes; impacts on water-related economic activities (e.g., fisheries, flood plain agriculture, transportation, etc.); health effects (e.g., increased incidence of water-borne and water related diseases). Additionally for road construction, consider loss of agricultural and residual lands; destruction of properties; loss of livelihood or other social disruption; relocation of infrastructures; unplanned settlements; noise; threat to cultural and historical sites or artifacts; demographic changes; potential for HIV/AIDS and other sexually-transmitted diseases. Also identify the impact due to resettlement and new livelihood options.

(d) Impact from road construction: Impact on air quality: air pollution from asphalt

plants; dust; noise from construction, equipment and blasting; impact on land resources: crossing of rivers, streams, canals and ravines, loss of habitat; foreclosure of other land uses; landslides; erosion; roadside litter; impact on hydrology: crossing of rivers, streams, canals and ravines; foreclosure of other land uses; landslides; erosion; modifications to natural drainage patterns and groundwater elevation; flash flooding; road side litter; impact on water quality: river/stream and lake sedimentation; use of pesticides; fuel and oil spills; water pollution from spills or accumulated contaminants on road surfaces; impact on biological environment: land clearance and loss of habitat; impacts on biodiversity caused by facilitation of access to and spontaneous settlements in natural areas; impacts on wetland management; control of hunting and poaching/wood-cutting

- vii. Conduct model study on the water flow, geomorphology and water quality due to project intervention and predict the impact on ecology and socio economic activities after ten years.
- viii. Identify the impact of the project intervention during lean period (seasonal variation) (impact on navigability, water variability).
- ix. Determine the cumulative impact of the road construction and river bank improvement for the entire project area. Identify any steps to be taken to reduce the impact of the construction of remaining tasks on the current project.

3.1.5 Analysis of Alternatives to the Proposed Project.

- x. Describe alternatives that were examined in the course of developing the proposed project and identify other alternatives that would achieve the same objectives. The concept of alternatives extends to siting and design of new alignments, rehabilitation techniques, choice of hydrological structures, and phasing, and operating and maintenance procedures, resettlement sites and livelihood support. Compare alternatives in terms of potential environmental impacts, capital and operating costs (including mitigation measures and their monitoring), and institutional, training, and monitoring requirements. To the extent possible, quantify the costs and benefits of each alternative, incorporating the estimated costs of any associated mitigating measures.
- xi. Based on the above analysis identify and propose the best engineering design parameters to ensure minimal environment impacts due to the project.
- xii. Closely work with the design consultants that those parameters are incorporated in the design.

3.1.6 Development of an Environmental Management Plan (EMP)

- xiii. Identify key mitigation and enhancement approaches and prepare the impact specific mitigation measures. Estimate the impacts and costs of the mitigation measures and of the institutional and training requirements to implement them. If appropriate, assess compensation to affected parties for impacts that cannot be mitigated. Prepare an EMP, including proposed work programs, budget estimates, schedules, staffing and training requirements, and other necessary support services to implement the mitigating measures, monitoring, etc. Include measures for emergency response to accidental events (e.g. entry of raw sewage or toxic wastes into rivers, streams, etc).
- xiv. Prepare a detailed plan to monitor the implementation of mitigating measures and the impacts of the project during rehabilitation and operation (eg, emission and ambient levels of pollutants where these may be detrimental to human health, soil erosion, changes in the

floodplain). Include in the plan an estimate of capital and operating costs and a description of other inputs (such as training and institutional strengthening) needed to implement the plan. Include a regular schedule of monitoring the quality of surface and ground waters to ensure that mitigation measures are effective. Provide guidance for reporting and enforcement and conducting environmental audits.

- xv. Estimate the costing of EMP, ECoP and provide necessary clauses for incorporating in the bid document.
- xvi. Review the responsibilities and capability of institutions at local, provincial/regional, and national levels and recommend steps to strengthen or expand them so that the EMP may be effectively implemented. The recommendations may extend to new laws and regulations, new agencies or agency functions, inter-sectoral arrangements, management procedures and training, staffing, operation and maintenance training, budgeting and financial support.
- xvii. An outline of the contents of the EMP to be included in the project's Operational Manual should be provided along with environmental/social protection clauses for contracts and specifications.

3.1.7 Assist in Inter-Agency Coordination and Public/NGO Participation.

xviii. The Consultant will assist the government in coordinating the EIA with relevant agencies and the government will consult with affected groups likely to be affected by the proposed project and with local NGOs on the environmental and social aspects of the proposed project. These groups should be consulted when a draft EIA is available (a summary of the EIA will be available prior to the meeting). The draft EIA should also be available in a public place accessible to affected groups and local NGOs being consulted. The consultation workshops will be held locally, regionally and nationally.

Relevant materials will be provided to affected groups in a timely manner prior to consultation and in a form and language that is understandable and accessible to the groups being consulted. The Consultant should maintain a record of the public consultation (written and video and pictorial proof) and the records should indicate: means other than consultations) eg, surveys) used to seek the views of affected stakeholders; the date and location of the consultation meetings, a list of the attendees and their affiliation and contact address; and, summary minutes.

3.1.8 Institutional responsibility

- xix. Define the roles and responsibilities of officials, staff, consultants and contractors of BWDB on environmental management;
- xx. Describe in details who will (a) implement the environmental mitigation activities (b) carrying out environmental monitoring; (c) supervise environmental mitigation and monitoring; (d) design, implement and apply the environmental management information system (EMIS); and (e) prepare quarterly progress report on environmental management;
- xxi. Finalize the draft EIA incorporating the comment from the consultation;
- xxii. Translate and finalize the EIA in Bengali.

4. Consulting Team composition and qualifications

- i. The studies outlined require interdisciplinary analysis with specialized sector knowledge (i.e., water resource and hydrology/embankment). The general skills required of the Environmental Safeguard team are: environmental management planning, civil/river /embankment engineer(s), with particular experience in dredging projects, river training and embankment construction and water-based transport; aquatic biologist depending upon the predicted impacts, land use planner, sociologist, archaeologist and communications / stakeholder engagement. The consulting team must be able to demonstrate appropriate skill mix and depth of experience to cover all areas of the proposed analysis, including incorporation of other specialized skill sets where required. The consulting team shall be led by a Team Leader with at least 10 years of experience leading EIA studies, including prior international experience on similar types of water resource projects, and prior experience as either team leader or deputy team leader on at least 3 previous major infrastructure EIAs for World Bank funded projects.

5. Schedule/Duration of the study

The study period shall be of **6 (six)** months from the date of commencement of the study.

6. Reports


After commencement of the study the submission of the reports shall be both in **hard (3 copies) and soft copy** as follows:

- Draft Environmental Impact Assessment---submitted at the end of 4th month of signing the contract
- Final Environmental Management Framework--submitted at the end of 3rd month of signing the contract.
- Final Environmental Impact Assessment---submitted at the end of 5th month of signing the contract
- Bengali Translation of the Environmental Management Framework--submitted at the end of 5th month of signing the contract.
- Bengali Translation of the Environmental Impact Assessment--submitted at the end of 6th month of signing the contract.

8. Reporting

The consultant will report to the Project Director, River Bank Improvement Project, Bangladesh Water Development Board (BWDB).

Appendix A: Location of Priority (Phase I) and Remaining (Phase II) Project Location

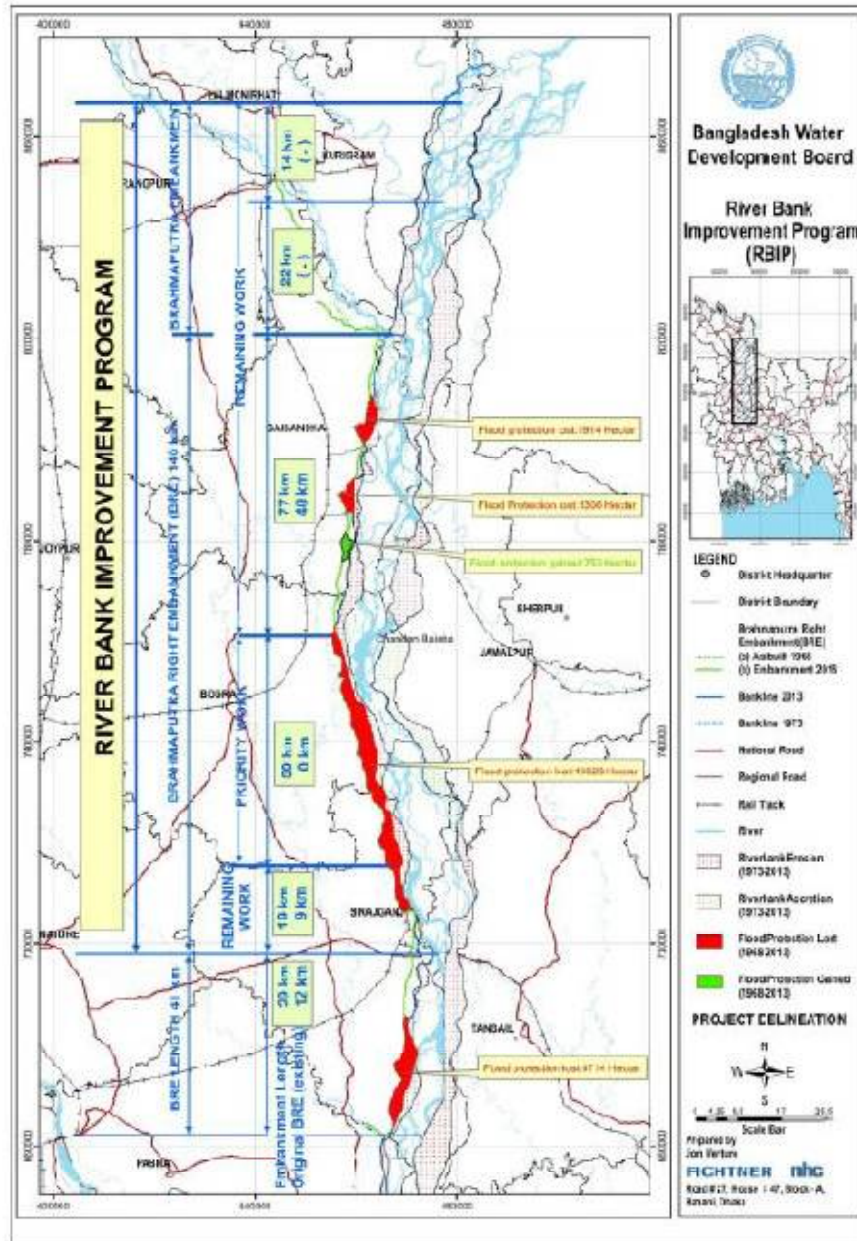

Appendix B: Structure of EIA Report

The Consultant is required to prepare an EIA report that is concise and limited to significant environmental issues. The main text should focus on findings, conclusions and recommended actions, supported by summaries of the data collected and citations for any references used in interpreting those data. Detailed or uninterrupted data are not appropriate in the main text and should be presented in appendices or a separate volume. Unpublished documents used in the assessment may not be readily available and should also be assembled in an appendix. Organize the environmental assessment report according to the outline below.

The report should be prepared as per the following key contents:

1. Executive Summary (ES): The Executive Summary should mirror the report both in form and content and should be about 10 percent in length of the report. The significant findings and recommended actions should be clearly discussed in the ES.
2. Introduction: This section will include (i) purpose of the report and (ii) extent of the environmental study.
3. Policy, Legal and Administrative Framework: This section will describe relevant environmental policies, rules and administrative procedures that need to be followed for the proposed project. The relevant international environmental agreements to which Bangladesh is a party should also be discussed.
4. Project design and Description: This section will provide a brief but clear picture about (i) type of project; (ii) category of project; (iii) need for project; (iv) location (use maps showing general location, specific location, and project site); (v) size or magnitude of operation; (vi) Project influence area (vii) proposed schedule for implementation. The proposed project should be described with reasonable details so that the EIA report can be read as a standalone document without reference to other project documents.
5. Analysis of Alternatives: Systematic comparison for feasible alternatives to the proposed project site, technology, design, and operation--including the "without project" situation--in terms of their potential environmental impacts should be done. The feasibility of mitigating these impacts; their capital and recurrent costs; their suitability under local conditions; and their institutional, training, and monitoring requirements have to be provided. For each of the alternatives, the quantification of the environmental impacts to the extent possible, and economic values where feasible should be given. The basis for selecting the particular project design proposed and justification for recommended emission levels and approaches to pollution prevention and abatement have to be provided.
6. Environmental Baseline: ***This section will provide sufficient information on the existing environmental baseline resources in the area affected by the project, including the following:***
 - (i) Physical Resources: ***(e.g. atmosphere, air quality and climate), topography and soils, surface water & groundwater, geology/seismology)***
 - (ii) Water Resources: ***(e.g. hydrology, surface water and groundwater system, sedimentation, tidal influence, etc.)***
 - (iii) Land and Agriculture resources: ***(e.g. land type, land use, cropping pattern, crop production, etc.)***
 - (iv) Fisheries resources: ***(e.g. fisheries diversity, fish production, etc.)***
 - (v) Ecology: ***(e.g. ecosystems, wildlife, forests, rare or endangered species, protected areas, coastal resources, etc.)***
 - (vi) Socio-economic condition: ***(e.g. population and communities (e.g. numbers, locations, composition, employment), health facilities, education facilities, socio-economic conditions (e.g. community structure, family structure, social wellbeing), physical or cultural heritage, current use of lands and resources for traditional purposes by indigenous peoples, structures or sites that are of historical, archaeological, paleontological, or architectural significance, economic development (e.g. industries, infrastructure facilities, transportation, power sources and transmission, mineral development, and tourism facilities, etc.).***

To assess the dimensions of the study area, the relevant physical, biological, and socioeconomic conditions before the project commencement should be discussed. The relevant data related to the issues have to be collected and reported.

7. Climate Change issues: ***Climate change aspects in global, regional and local perspectives and the likely impacts on the Project area and its surroundings should be briefly discussed in this section.***
8. Significant Environmental Impacts: This chapter will need careful interpretation. Significant environmental and social impacts due to project location, and related to project design, construction, and operations phase should be discussed in detail in this section. The prediction and assessment of the project's likely positive and negative impacts, in quantitative terms to the extent possible should be made. The mitigation measures and any residual negative impacts that cannot be mitigated should be identified. The opportunities for environmental enhancement should also be explored. Estimates should be done on the extent and quality of available data, key data gaps, and uncertainties associated with predictions; and the topics that do not require further attention should be specified. Considering the impact the project has to be classified into Categories of A, B or C as per OP 4.01.
9. Cumulative and Induced Impacts: Cumulative impacts of the proposed Project and other projects as well as induced impacts should be provided in this section.
10. Design Parameters: This section should present the parameters which should be considered in the design for minimizing the environmental impact.
11. Environmental Management Plan: The environmental management plan (ESMP) will include mitigation and enhancement plan, compensation and contingency plan as well as monitoring plan including institutional arrangement for implementation of the EMP. The EMP should also include tentative cost of implementation of the plan. Guideline for preparation of EMP is included below.
12. Stakeholder Consultation and Disclosure: The proceeding of the consultations done as per OP4.01 has to be included in this section of the EIA report. It is to be noted that during the EIA process for all WB Category A and B projects, the proponents have to consults project-affected groups and local nongovernmental organizations (NGOs) about the project's environmental aspects and take their views into account. The proponents' initiates such consultations as early as possible. For Category A projects, the proponents consult these groups at least twice: (a) shortly after environmental screening and before the terms of reference for the EIA is finalized; and (b) once a draft EIA report is prepared. In addition, the proponent must consult with such groups throughout project implementation as necessary to address EIA-related issues that affect them.
13. Disclosure: For meaningful consultations between the borrower and project-affected groups and local NGOs on all Category A and B projects proposed for WB financing, the proponents must provide relevant material in a timely manner prior to consultation and in a form and language (i.e. Bangla) that are understandable and accessible to the groups being consulted. The disclosure details done as per OP 4.01 should be provided in this section.
14. Grievance Mechanism: A mechanism should be outlined to ensure that the project sponsor maintains appropriate external channels for communicating with and receiving feedback, questions, and complaints from local stakeholders, as well as internal

procedures for following up and resolving any complaints or grievances in a timely manner. The mechanism should include more than one channel for receiving communications and grievances (for example, a hotline, a public information office, boxes to receive written complaints or queries, etc. – depending on local preferences, literacy levels, etc.), as well as indicating requirements, responsibilities and budget for documenting, processing, and resolving issues that arise, including providing feedback to complainant(s) regarding the resolution. The existence of the grievance mechanism must be fully and proactively disclosed to the public.

15. **Discussions and Conclusions:** The essential issues in the EIA report should be summarily discussed and the conclusions are to be included in this section.
 16. **References:** References should be provided to written materials both published and unpublished, used in study preparation.
- Annexes:
 - ✓ List of Environmental Assessment Preparers
 - ✓ Record of interagency and consultation meetings, including consultations for obtaining the informed views of the affected people and local nongovernmental organizations (NGOs). The record specifies any means other than consultations (e.g., surveys) that were used to obtain the views of affected groups and local NGOs
 - ✓ Data and Unpublished Reference Documents

Guideline for Preparing Environment Management Plan

Environmental Management Plan (EMP)

The Consultant is required to develop an Environmental Management Plan (EMP) consisting of a set of feasible and cost-effective mitigation measures and monitoring and institutional plan to prevent or reduce significant negative impacts to acceptable levels. This will include measures for emergency response to accidental events (e.g., fires, explosions), as appropriate. The Consultant will provide an estimation of the impacts and costs of the mitigation measures, and of the institutional and training requirements to implement them. In particular this would include:

Environmental Mitigation & Enhancement Measures: Recommend feasible and cost-effective measures to prevent or reduce significant negative impacts to acceptable levels. Apart from mitigation of the potential adverse impacts on the environmental components, the EMP shall identify opportunities that exist for the enhancement of the environmental quality along the surrounding area. Residual impacts from the environmental measures shall also be clearly identified. The EMP shall include detailed specification, bill of quantities, execution drawings and contracting procedures for execution of the environmental mitigation and enhancement measures suggested, separate for pre-construction, construction and operation periods. In addition, the EMP shall include good practice guides related to construction and upkeep of plant and machinery. Responsibilities for execution and supervision of each of the mitigation and enhancement measures shall be specified in the EMP. A plan for continued consultation to be conducted during implementation stage of the project shall also be appended.

Capacity Building & Training: The EMPs shall describe the implementation arrangement needed for the project, especially the capacity building proposals including the staffing of the environment unit (as and when recommended) adequate to implement the environmental mitigation and enhancement measures. For each staff position recommended to be created, detailed job responsibilities shall be defined. Equipment and resources required for the environment unit shall be specified, and bill of quantities prepared. A training plan and schedule shall be prepared specifying the target groups for individual training programs, the content and

mode of training. Training plans shall normally be made for the client agency (including the environmental unit), the supervision consultants and the contractors.

Supervision & Monitoring: Environmental monitoring plan will be an integral part of an EMP, which outlines the specific information to be collected for ensuring the environmental quality at different stages of project implementation. The parameters and their frequency of monitoring should be provided along with cost of the monitoring plan and institutional arrangements for conducting monitoring. Reporting formats should be provided along with a clear arrangement for reporting and take corrective action. The EMP shall list all mandatory government clearance conditions, and the status of procuring clearances. Additionally, the EMPs shall include as separate attachments, if applicable, Natural Habitat Plan and/or Cultural Properties Plan to satisfy the requirements of the World Bank safeguard policies.

Annex C. Location and Specification of Different Fish Habitats and Chars

Citation in the main text (Volume I): **Section 6.5.3.3.**

Sirajganj Sadar Upazila

Water body type	Country side (Name/ No.)	River side (Name/No.)	Specification
River		Jamuna	
	Ichhamoti		
Beel/ Wetlands	Aminpur beel		0.80 ha
	Joynagar beel		20 ha
	Charkhada		0.80 ha
	Chatiantolir beel		13.36 ha
	Ghuria beel		6.68 ha
	CNB Beel		2.67 ha
Khal/Canal	Kothir Pinjira		
	WAPDA Khal		
	Doi Vanger khal		
	Balia ghugri khal		
	Perpachil khal		
	Bahuka khal		
Kole (Embayment)		Simla	2.97 ha
		Mothiar kul - achthakuri	3.34 ha
	Balutia- Moshamara		334.01 ha
Pond	52 nos.	10 nos.	3.51 ha

	Name of Char	Location (From proposed Baliaghugri regulator)
1	Simla	4 km east
2	Kharoya	6 km east
3	Khas para	7 km north-east
4	Par Simla	3 km north-east
5	Noya para	5 km north-east

	Name of Char	Location (From proposed Baliaghugri regulator)
6	Dumber char	2 km north east
7	Jhumkal char	7 km north

Kazipur Upazila, Sirajganj

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River		Jamuna	
Beel/ Wetlands	Paikartoli beel		500 ha
	Chalita danga beel		300 ha
	Vhut baria beel		240 ha
	Kachihara beel		1000 ha
	Pagol kandi beel		500 ha
Khal/Canal	Halot khal		37.5 ha
	Meghai khad		2 km long (15.36 ha)
Pond	70 nos.	18 nos.	4.99 ha

Dhunat upazila, Bogra

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River	Manos river		8.75 ha
Beel/ Wetlands		Jagiar beel/ Vander bari	10 ha
	Bera danger beel		200 ha
	Houra khali beel		112.5 ha
Khal/Canal	Madhob Danga		8 ha
	Shimul bari khal		12 ha
Kole (lagoon)		Pukuria	8.02 ha
		Sariakandi	0.67 ha
		Shamol bari	1.07 ha
		Baniajan	0.67 ha
		Adhanagar	0.67 ha
		Boishakhi	5.34 ha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
		Chunia para	40.08 ha
Pond	59	40	5.61 ha

	Name of Char	Location
1	Maiz bari	3 km east From proposed Pukuria- Vanderbari regulator
2	Vanger bari	2 km east From proposed Pukuria- Vanderbari regulator
3	New Sariakandi	3 km north-east From proposed Pukuria- Vanderbari regulator
4	Pukuria	East to proposed Pukuria- Vanderbari regulator
5	Boroikandi	East to proposed Pukuria Vanderbari regulator
6	Baniajan	East to proposed Pukuria Vanderbari regulator
7	Koia gari	East to proposed Pukuria Vanderbari regulator
8	Atai	East to proposed Pukuria Vanderbari regulator
9	Sohora	East to proposed Pukuria Vanderbari regulator
10	Boishaki	1 km east from Shimul baria spur
11	Adhanagor	1 km East from Shamol bari spur
12	Fuljhur	2 km southeast from Shamol bari spur
13	Mollik para	3 km southeast from Shamol bari spur
14	Shree pur	3 km southeast from Shamol bari spur
15	Agura Maizbari	4 km southeast from Shamol bari spur
16	Dhakuria	5 km southeast from Shamol bari spur
17	Boyan char	3 km east from Chuniapara regulator
18	Majhira	4 km east from Chuniapara
19	Shanbandha	5 km east from Chuniapara
20	Promitibari	6 km north from Chuniapara
21	Noi khola	6 km north from Chuniapara

Sariakandi Upazila, Bogra

Water body type	Country side (Name/No.)	River side (Name/No.)	Specifications
River		Jamuna	
		Bangali	
Beel/ Wetlands	Dauli beel		1 km long (50 ha)
	Vakir beel		60 ha
	Bera beel		100 ha
	Dikdar beel		2 km N- W from Hasnapara , 30
	Dighol kandi beel		40.08 ha
	Satbilla beel		293.93 ha (5 km long)
	Kalaihata beel		26.72 ha
	Burungir beel		20 ha
	Gojariar beel		60 ha
Khal/ Canal	Kata khal		1 km long (3.50 ha)
		Kuripara canal	derived from Jamuna and directed to Shalukar char , 4 ha
		Shalukar canal	derived from Jamuna and directed to Shalukar char,5.25 ha
		Char bati canal	derived from Jamuna and directed to Shalukar char, 5 ha
Kole (lagoon)	Antarpara kole		East to Antarpara regulator (4.01 ha)
	Nich Kola		0.75 km north from Hasnapara (8.01 ha)
	Khurda boloi		0.5 km east- from Hasnapara (6.68 ha)
	Maiz bari		5952.02 ha
	Taltola		66.80 ha
	Kazlar kole		10.69 ha
	Gobindapur		7 ha
	Nolcia		5.5 ha
	Beragram		10 ha
	Holdia		14 ha
Pond	75 nos.	20 nos.	5.38 ha

	Name of Char	Location/ Feature
1	Kuripara	East to proposed Antarpara regulator
2	Khapur para	East to proposed Antarpara regulator
3	Antarpara	East to proposed Antarpara regulator
4	Kazla	East to proposed Antarpara regulator
5	Ghager char	East to proposed Antarpara regulator
6	Diga para	1 km northeast from Hasnapara
7	Chokorthinatha	3 km northeast from Hasnapara
8	Konnobari	4 km northeast from Hasnapara
9	Kormoja	2 km north from Hasnapara
10	Housherpur	1.5 km north from Hasnapara
11	Sujatpur	3 km north from Hasnapara
12	Bauli para	4 km north from Hasnapara
13	Banupur	2 km east from Hasnapara
14	Dhorbon	1 km southeast from Hasnapara
15	Pakuria char	West to Shalukar char
16	Jamtoil	West to Shalukar char
17	Manik	North to Shalukar char
18	Nobboi	Northeast to Shalukar char
19	Barabajbari	East to Shalukar char
20	Indurmara	South to Shalukar char
21	Hasnapara	Southeast to Shalukar char
22	Dakat mara	Southeast to Shalukar char
23	Chanpara	Southeast to Shalukar char
24	Gobindapur	7 km northeast from Kundupara
25	Nolcia	4 km northeast from Kundupara
26	Fazilpur	6 km east from Kundupara
27	Joyantirpara	4 km east from Kundupara

Sonatola Upazila, Bogra

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
Beel/ Wetlands	Saluka beel		13.36 ha, perennial, average water depth= 15 feet
Pond	16	2	0.87 ha

	Name of Char	Location/ Feature
1	Khabilla	5 km southeast from Pakulla, Bogra
2	Boro vanga	10 km East from Pakulla
3	Shollia	8 km southeast from Pakulla
4	Auchar	10 km southeast from Pakulla
5	Patil char	11 km southeast from Pakulla

Shaghata Upazila, Gaibandha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River		Jamuna	
Beel/ Wetlands	Kharkhara		0.5 km west from Saghata sluice gate, 5 ha, Seasonal, water depth 8 feet
	Charagata		1.5 km west from Saghata sluice gate, 6 ha, Perennial, water depth 20 feet
	Ghoridaho		3 km west from Saghata sluice gate, 3 ha, Perennial, water depth 15 feet
	Kachur beel		West to Kachuar regulator, 2.01 ha, perennial, culture
	Beel bosta		0.5 km south from Kachuar regulator, 2 ha, perennial, culture
	Vagir beel		0.81 ha, southeast of Nilkhuthi village , Bhorot khali union , Shaghata, Gaibandha
	Napiter beel		0.81 ha
Kole (Seasonal water body)		Hatbari	5 km east from Saghata sluice gate, 4 ha
		Pansi para	5 km north from Saghata sluice gate, 10 ha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
		Shaghata	1 km east from Saghata sluice gate, 14 ha
		Kachuar kole	300 m west from Saghata sluice gate, 50 ha, Perennial, water depth (R=25 feet, D=12 feet)
		Bashhata	657, 0.40 ha
		Shatilla	657, 2.67 ha
Pond	40 nos.	6 nos.	2.79 ha

	Name of Char	Location / Feature
1	Hatbari	3 km east from Saghata sluice gate
2	Delabari	6 km east from Saghata sluice gate
3	Jamira	8 km east from Saghata sluice gate
4	Batoner char	1 km east from 657
5	Shatilar char	2 km east from 657

Fulchari Upazila, Gaibandha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
		Brahmaputra	
River	Ghaghot	Ghaghot	
	Alai	Alai	
Beel/ Wetlands	Singrai beel		N-E to Catlamari sluice gate, 80.16 ha, Perennial, water depth(R= 15 feet, D= 5 feet)
	Gauchulki beel		N-W to Catlamari sluice gate, 20.16 ha, Seasonal, water depth(R= 7 feet, D= 0 feet)
	Khathuria beel		N-E to Ratanpur sluice gate, 26.72 ha, Perennial, water depth (R= 15 feet, D= 7.5feet)
	Kabilpur beel		4 km S from proposed Kanchipara regulator, 30 ha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
	Gun bhuri		5.5 km S from proposed Kanchipara regulator
	Ratanpur beel		5.5 km S from proposed Kanchipara regulator
Canal		Gopaldoba	6.01 ha, 1 km east from Catlamari regulator(2v)
Kole (Seasonal water body)		Khazjani Kole	0.5 km E from Hardanga Char, 26.73 ha, Perennial, water depth (R=30 feet, D=15 feet
		Coach khali kole	1.5 km N from Hardanga Char, 13.36 ha, Perennial, water depth (R=25.5 feet, D=7.5 feet
Pond	55 nos.	12 nos.	3.53 ha

	Name of Char	Location / Feature
1	Khatia mari	6 km S-E from proposed kanchipara regulator
2	Haro danga	3 km S from proposed kanchipara regulator
3	Satar danga	1.5 km E-N from proposed kanchipara regulator
4	Kauya para	3 km E from proposed kanchipara regulator
5	Kuch khali	1 km E from proposed kanchipara regulator
6	Jora bari	1.5 km E-S from proposed kanchipara regulator
7	Kabilpur	1.5 km E-S from proposed kanchipara regulator
8	Fazlur pur	3 km E-S from proposed kanchipara regulator
9	Kalosona	6 km S from proposed kanchipara regulator
10	Chomohan	4 km S from proposed kanchipara regulator
11	Krishnomoni	4.5 km S from proposed kanchipara regulator
12	Zira bari	10 km E from proposed kanchipara regulator
13	Khazjani	1.5 km E from Hardanga Char
14	Kauyabada	5 km E-N from Hardanga Char
15	Rahamatpur	4 km E-N from Hardanga Char
16	Satarkandi char	5 km E from Hardanga Char

Sadar, Gaibandha

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River	Ghaghot		
	Manos River		
		Brahmaputra	
Floodplain/ Wetlands	Vela goa beel		0.25 km W from Baguria point ,two parts divided by WAPDA badh, 9.35 ha, Seasonal, water depth(R= 15 feet)
	Pakhimara beel		Adjacent to existing 8 vent regulator,1002.02 ha, Seasonal, Water depth =7 feet
	Puiya gara beel		Adjacent to proposed taltola regulator,240.49 ha, seasonal , water depth = 6 feet
	Purbo Baroboldia beel		Adjacent to(N-W) Proposed Kamarjani regulator, 280.57ha, Perennial , Average water depth = 7.5 feet
	Gidari beel		2.5 km S-W from Proposed Kamarjani regulator, 400.81ha, Perennial , Average water depth = 9 feet
Canal	Kamarjani khal		Along the WAPDA badh
		Dara/Canal	Brahmaputra to WAPDA badh
Kole (Seasonal water body)		Uttar gidari kole	10 km N from Hardanga Baguria point, 1.07 ha, Perennial, water depth (R=30 feet, D=10.5 feet
		Gorain kole	1.20 ha, Perennial, water depth (R=30 feet, D=12 feet
		Kalaibari	8 km E-S from first grown of Anarar chora,5.34 ha, Perennial, water depth (R=30 feet, D=12 feet, Fish culture practiced
		Khazjani	10 km E-S from first grown of Anarar chora, 3.34 ha, Perennial, water depth (R=25 feet, D=10 feet, Fish culture practiced
		Gidari	2 km N-W from first grown of Anarar chora,6.68 ha, perennial, water depth (R=22.5 feet, D=7.5 feet
		Khana bari	4 km northeast from proposed Kamarjani regulator, 9.35ha, Perennial , Average

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
			water depth = 12 feet
		Kamarjani	2 km E from Proposed Kamarjani regulator, 3.34 ha, Perennial , Average water depth = 10 feet
		Koraibari	2 km E-N from Proposed Kamarjani regulator, 8.02 ha, Perennial , Average water depth = 11 feet
		Matikhola	7 km S- E from Proposed Kamarjani regulator, 66.80 ha, Perennial , Average water depth = 12 feet
Pond	244 nos.	17 nos.	13.74 ha

	Name of Char	Location / Feature
1	Raidas bari	2 km N from Baguria point
2	Faliar gob	3 km E from Baguria point
3	Kalai bari	4 km E from Baguria point
4	Khas jani	5 km E from Baguria point
5	Patdiara	6 km E from Baguria point
6	Kundarpara	7 km E from Baguria point
7	Batkamari	9 km E from Baguria point
8	Fazlur pur	3 km E-S from proposed kanchipara regulator
9	Kalosona	6 km S from proposed kanchipara regulator
10	Chomohan	4 km S from proposed kanchipara regulator
11	Krishnomoni	4.5 km S from proposed kanchipara regulator
12	Zira bari	10 km E from proposed kanchipara regulator
13	Khazjani	1.5 km E from Hardanga Char
14	Kauyabada	5 km E-N from Hardanga Char
15	Rahamatpur	4 km E-N from Hardanga Char
16	Satarkandi char	5 km E from Hardanga Char
17	Folar cock	3 km E- N from Anarar chora
18	Sayedpur	5 km E- N from Anarar chora

	Name of Char	Location / Feature
19.	Satarkangi	10 km E from Anarar chora
20	Khazjani	10 km E- N from Anarar chora
21	Kalaibari	7 km E from Anarar chora
22	Aijaz bari	2 km E from Anarar chora
23	Khamarjani	6 km E from Proposed Kamarjani regulator
24	Karaibari	5 km E-S from Proposed Kamarjani regulator
25	Batkamari	9 km E-S from Proposed Kamarjani regulator
26	Kandolpara	25 km E-S from Proposed Kamarjani regulator
27	Kolmu	18 km E-S from Proposed Kamarjani regulator
28	Puran char	8 km E-N from Proposed Kamarjani regulator
29	Sidhai	25 km E from Proposed Kamarjani regulator

Chilmari Upazila, Kurigram

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River	Sorai river	Sorai river	Brahmaputra to Shreepur
Beel/ Wetlands	Chang mari beel		713, Seasonal, water depth(R= 9 feet)
	Nakhali beel		713 ,Seasonal, water depth(R= 7 feet)
	Baharer beel		3 km N from Horichiri ghat (12 vent) regulator, 80.16ha, Perennial , Average water depth = 10 feet,
	Hasar dala beel		5 km N from Horichiri ghat (12 vent) regulator, Seasonal , Average water depth = 7 feet
	Mohisalar beel		N to Horichiri ghat (12 vent) regulator,, 13.36ha, Seasonal , Average water depth =

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
			8 feet
	Magurar beel		1 km N from kachkol (10 vent) regulator, 160.32 ha, Seasonal Average water depth = 7 feet
	Shol dukri		2 km W from Kachkole regulator, 120.24 ha
	Kodal daho beel		2.5 km N from Kachkole regulator
	Kalir pati		4 km W from Kachkole regulator
	Rajar ghat		4 km W from Kachkole regulator
	Ranigonj (Domer hat)		6 km W from Kachkole regulator
	Khaye ghat		7 km W from Kachkole regulator
	Hagritola beel		80.16 ha
	Koyar beel		601.21 ha
Khal/Canal	Gidari canal		20 km long (28 ha)
	Antarpur canal		8 km long (12 ha)
Kole (Lagoon)		Agabor kole	E to Horichori ghat regulator, 2.67 ha, Perennial, Average water depth= 12 feet
		Horipur-1	2 km S to Horichori ghat regulator, Seasonal, Average water depth= 8 feet
		Horipur-2	3 km W to Horichori ghat regulator, Perennial, Average water depth= 10 feet
		Hasher beel kole	4.01 ha, Seasonal, water depth = 15 feet
		Bahattor kole	5 km E from kachkol (10 vent) regulator, 20.04 ha, Perennial, Average water depth = 30 feet
		Haser vita kole	3 km E from kachkol (10 vent) regulator, Perennial, 3.21 ha, average water depth = 18 feet
		Kachkole	0.5 km s from simultola/Magurar regulator, Perennial, average water depth=15 feet
		Kolapani	1.5 km E from Simultola/Magurar regulator, Perennial, 1.34 ha, average water depth= 9 feet

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
		Badhdhara	5 km E from Simultola/Magurar regulator , Perennial, 4.01 ha, Average water depth= 15 feet
		Uttarowari	5 km E-N from Simultola/Magurar regulator , Perennial
		Bongram	100.20 ha, perennial, Average water depth=30 ha

	Name of Char	Location / Feature
1	Gorghoti char	2 km E from Shimultola regulator
2	Chutarmari	20 km S from Shimultola regulator
3	Bagdhara badh	8 km S from Shimultola regulator
4	Nauer char	8 km S from Shimultola regulator
5	Boro vitar char	7 km W-S from 728
6	Bongram char	8 km E-N from 728
7	Damar char	1 km S-W from Horichorighat regulator
8	Char horipur	3 km S-W from Horichorighat regulator
9	Nil char	8 km S-W from Horichorighat regulator

Ulipur, Kurigram

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River		Brahmaputra	
		Sorai	
Beel/ Wetlands	Anantapur beel		7 km W from proposed Anantapur regulator, perennial
	Paglir kuri		4 km W-S from proposed Anantapur regulator, perennial
	Nayantapur		8 km W-N from proposed Anantapur regulator, perennial
	Chirokhaoya dola		4 km S from proposed Anantapur regulator, perennial
	Malchar par		7 km S from proposed Anantapur regulator, perennial

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
	Kosulla		Adjacent to regulator, 1.5 km long, 500 m wide, Seasonal (3 month), water depth=9.5 feet
	Singramari		1 km N-W from regulator, seasonal (4 month), water depth=10.5 feet
	Kossa		3 km N-W from regulator, seasonal (5 months), 15 feet
	Darki mari beel		1.5 km N from regulator, 4 km long, 3 km wide, perennial, water depth=14 feet
	Chokchoka beel		5 km N from regulator, 5 km long, 4 km wide, perennial
Kole (Lagoon)		Jolanger kuthi	2 km E from ..., 48.09 ha,
		Anantapur kole	100 m E from Anantapur regulator , 320.65 ha, Perennial, Average water depth=30 feet
		Kolakata	4 km E-N from Anantapur regulator , 480.97 ha, Perennial, Average water depth=30 feet
		Gujimari	2 km E from Anantapur regulator , 40.08 ha, Perennial, Average water depth=30 feet
Pond	38 nos.	13 nos.	2.68 ha

	Name of Char	Location / Feature
1	Anantapur char	100 m E from Anantapur regulator
2	Gujimari	1 km E from Anantapur regulator
3	Uttar gujimari	2 km N from Anantapur regulator
4	Dakkhin gujimari	km S from Anantapur regulator
5	Sukherbati	25 km S from Anantapur regulator
6	Char Bagua	20 km S from Anantapur regulator
7	Parar char	7 km east from Balaijan regulator
8	Kaziar char	8 km E from Anantapur regulator
9	Durga pur	14 km E from Anantapur regulator

Sadar, Kurigram

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
River		Brahmaputra	
		Dhudkumar	
Beel/ Wetlands	Ponchar beel		0.75 km W from Aragikodomtola regulator, 2.40 ha, Perennial, water depth=10 feet, fish culture practiced
	Jobber munsher beel		1 km W from Aragikodomtola regulator, Perennial, water depth=10.5 feet
	Amluddi hazir beel		2 km W from Aragikodom regulator, water depth=12 feet
	Kazol daho		2 km W from 743 regulator
	Dubba churi		2.5 km N-W from 743 regulator
	Gagla beel		1 km W from Existing Tangormarir patar regulator, 40.08 ha, perennial, average water depth=9 feet
	Sarisui beel		1.5 km N from Existing Tangormarir patar regulator, 60.12 ha, perennial, average water depth=16 feet
	Dolarpar beel		1.5 km N-W from Existing Tangormarir patar regulator, 80.16 ha, seasonal, average water depth=8 feet
	Sonalir khuthi beel		1.5 km W from Existing Tangormarir patar regulator, 10.69 ha, Seasonal, average water depth=10 feet
	Hodir beel		3 km W-N from Existing Tangormarir patar regulator, 20.04 ha, Perennial, average water depth=15 feet
	Koi ghuri		4.5 km N-W from Tangormarir patar regulator
	Duba churi		7 km S-W from Tangormarir patar regulator, 8.02 ha, water depth=5 feet
	kazol daho		9 km S-W from Tangormarir patar regulator, 13.36 ha, seasonal, water depth=6 feet
	Pachgaciar chora		5 km W from Tangormarir patar regulator, 80.16 ha, perennial, water

Water body type	Country side (Name/No.)	River side (Name/No.)	Specification
			depth=20 feet
	Misti parar beel		1 km N-W from Tangormarir patar regulator, 2 ha, perennial, water depth = 10 feet
Khal/Canal	Girai nodi/Khal		1 km west from khama Rasulpur, 4.8 ha, 4 km long
Kole (Lagoon)		Gobindopur	2 km E from Aragikodomtola regulator, 80.16 ha, perennial, Water depth=15 feet
		Perbotti pur	3 km E from Aragikodomtola regulator, 140.28 ha, perennial, Water depth=18 feet
		Vushakuthi	2 ha, perennial, Water depth=10 feet
		Sarkerpara vanga	0.5 km N from Tangormarir patar regulator, 40.08 ha, perennial, Water depth=14 feet
		Prothom alo kole	2 km E-S from Tangormarir patar regulator, 12.04 ha
		Bangar dola kole	1.5 km E-N from Tangormarir patar regulator, 10.69 ha
		Kath giri kole	2.5 km N from Tangormarir patar regulator , 10.69 ha
		Pocha kata kole	5 km N from Tangormarir patar regulator , 9.35 ha
		Shantiar kole	2.5 km E from Tangormarir patar regulator , 13.36 ha
		Rolakata kole	4 km E-N from Tangormarir patar regulator , 9.35 ha
		Narayanpur kole	8 km E from Tangormarir patar regulator , 133.60 ha, perennial
		Astoasi kole	7 km E-N from Tangormarir patar regulator , 13.36 ha, perennial
		Jhumkar kole	6 km E from Tangormarir patar regulator , 12.02 ha
Pond	47 nos.	3 nos.	2.43 ha

	Name of Char	Location / Feature
1	Prothom alo	2 km E-S from Tangormarir patar regulator, 12.04 ha
2	Bangar dola	1.5 km E-N from Tangormarir patar regulator, 10.69 ha
3	Kath giri	2.5 km N from Tangormarir patar regulator , 10.69 ha
4	Pocha kata	5 km N from Tangormarir patar regulator , 9.35 ha
5	Shantiar	2.5 km E from Tangormarir patar regulator , 13.36 ha
6	Rolakata	4 km E-N from Tangormarir patar regulator , 9.35 ha
7	Narayanpur	8 km E from Tangormarir patar regulator , 133.60 ha, perennial
8	Astoasi	7 km E-N from Tangormarir patar regulator , 13.36 ha, perennial
9	Jhumkar	6 km E from Tangormarir patar regulator , 12.02 ha
10	Raulia char	Adjacent and E to Tangormarir patar regulator
11	Char Rasulpur	1.5 km E from Tangormarir patar regulator
12	Majher char	3 km E from Tangormarir patar regulator
13	Catlar char	1.5 km E-N from Tangormarir patar regulator
14	Fakirere char	2 km E-N from Tangormarir patar regulator
15	Kathgirir char	2.5 km N from Tangormarir patar regulator
16	Motherganj char	4 km N from Tangormarir patar regulator
17	Barobisha	3 km E-N from Tangormarir patar regulator
18	Khaser char	3.5 km E-S from Tangormarir patar regulator
19.	Balduba	3 km E-S from Tangormarir patar regulator
20	Porar char	4.5 km E-S from Tangormarir patar regulator
21	Mirgamari char	6 km W from Tangormarir patar regulator

Annex D. Tree Plantation Plan

Citation in the main text (Volume I): **Section 9.4.1.4.**

This plantation raising program provides the following details:

- Species to be used for establishing the plantation.
- Seedlings availability.
- Spacing and planting technique.
- Rotation to be used.
- Cost estimates of establishing tree plantation per unit area.
- Plantation management or maintenance.
- Yield prediction.
- Participant involvement mechanism.

The site at which this plantation will be raised is the country side slope of embankment cum road. The slope is 33%. The aspect will be mostly eastern. This plantation will be something like the “strip plantation” that is raised by the Forest Department. The plantation raising modality should preferably be a “Participatory Approach”. The required details in this connection are being described below.

1. Species that may be used for establishing the plantation

It is better to decide about the species through discussions with the participants. But in this sort of discussions technical support will be essential from the authority. In this case, since the land in question is owned by the Bangladesh Water Development Board (BWDB), this agency will require to play the role of “authority”. It is generally expected that the local people will prefer to plant ‘Eucalyptus’ species, since they have a bias towards this species. The local people for various reasons prefer this species over others. In this connection, it has to be borne in mind that the government has an embargo in planting eucalyptus species. BWDB being an autonomous semi government agency, it will be better to avoid planting eucalyptus. The species that are commonly used in case of trip plantations include:

	Local name	Biological name	Some special features in connection with its use in road side or strip plantations
	Akashmoni	<i>Acacia auriculiformis</i>	Fast growing medium quality timber but looks like teak.
	Chattian	<i>Alstonia scholaris</i>	Fast growing match-wood, nice & strong smelling flowers.
	Kodom	<i>Anthocephalous kadamba</i>	Good match wood, fast growing, good looking flowers,
	Hijol	<i>Barringtonia acutangula</i>	A fresh water wetland species, branches produce "Khata" for open water fishing.

	Local name	Biological name	Some special features in connection with its use in road side or strip plantations
	Tal	<i>Borassus flabellifer</i>	Fibrous rooted slow growing long living plant, can with stand strong wind thrusts, juice and fruits fetches high price.
	Toon	<i>Cedrela toona</i>	Good timber, light weight, used in making rickshaw body, boat, etc.
	Chikrassia	<i>Chickrassia tabularis</i>	Faster growing, good timber species
	Narikal	<i>Cocos nucifera</i>	Fibrous rooted medium growing plant, can withstand strong wind thrusts, fruits green or ripe fetches high price.
	Kala Jam	<i>Eugenia spp / Syzygium cumini</i>	Good construction timber, fruits are highly priced.
	Puti jam	<i>Eugenia spp.</i>	Good and durable construction wood yielding tree.
	Gamar	<i>Gmelina arborea</i>	Wood is "A grade" timber, fast growing, high priced.
	Ghora Neem	<i>Melia azadericta</i>	Fast growing but soft, snaps off during strong wind,
	Neem	<i>Melia indica</i>	Possess good medicinal values, durable wood, used in musical instrument making (especially tabla)
	Khajoor	<i>Phoenix sylvestris</i>	Fibrous rooted medium growing plant, can withstand strong wind thrusts, juice used to make "gur" & fetches high price, long living tree.
	Amloki	<i>Phyllaenthus embellica</i>	Timber value is poor but it is a medicinal plant, fruits fetches high price, attract birds.
	Koroj	<i>Pongamia pinnata</i>	Fast growing, grow in wet areas, seeds yield oil, medium quality wood.
	Payaara	<i>Psidium guajava</i>	Timber is not good but the fruits fetches high price.
	Rain tree	<i>Samanea saman</i>	Large crown, occupy lots of space, drips are harmful to road pavements.
	Barapatar mehagony	<i>Swietenia macrophylla</i>	Slightly faster growing, very often affected by stem borer, produces good timber,
	Chotopatar Mehagony	<i>Swietenia mehogoni</i>	Slow growing, affected by stem borer, very good timber species.
	Tetool	<i>Tamarindus indica</i>	High caloric wood, heavy, slow growing, high water shed values, and fruits are highly priced.
	Arjun	<i>Terminalia arjuna</i>	Medicinal plant, medium quality wood, bark fetches high price, fruits attract deer.
	Hartaki	<i>Terminalia chebula</i>	Medicinal plant, medium quality wood, fruits fetches high price & attract deer.

	Local name	Biological name	Some special features in connection with its use in road side or strip plantations
	Harbarooi		Medicinal plant, wood quality poor, fruit fetches high price.

It is better to keep the number of species under a manageable number. The number species to be used should not exceed 10. In view of the above discussions, the following species may be used but this must be shared with the local communities so that they are 'on board' and own the selection of species.

	Local name	Biological name	Remarks
	Akashmoni	<i>Acacia auriculiformis</i>	Maximum 20%, to be felled in 8 th year
	Barapatar mehagony	<i>Swietenia macrophylla</i>	To be felled in 12 th year
	Chikrassia	<i>Chickrassia tabularis</i>	To be felled in 10 th year
	Gamar	<i>Gmelina arborea</i>	To be felled in 8 th year
	Neem	<i>Melia indica</i> / <i>Azadirachta indica</i>	To be felled in 10 th year
	Toon	<i>Cedrela toona</i>	To be felled in 12 th year
	Khajoor	<i>Phoenix sylvestris</i>	Never to be felled (may be replaced by another fruit or fresh water wetland species, including <i>Syzygium cumini</i> , <i>Phyllaenthus embellica</i> , etc. at the death of the tree).
	Narikal	<i>Cocos nucifera</i>	
	Tal	<i>Borassus flabellifer</i>	
	Hijol	<i>Barringtonia acutangula</i>	
	Payaara	<i>Psidium guajava</i>	To be planted on the (1+6+2.95=) 9.95 Meter wide strip, between the road and the river, at 4 X 4 Meter spacing.

2. Seedlings availability

Since the planting program will not continue for years, the seedlings may be procured from sources such as Forest Department Nurseries or Private Nurseries. It is expected that the quality of the seedlings from FD nurseries will be better. One will have to decide about the year in which these will be planted on the given site. For better success, at least 3.5 feet tall seedlings in 10" x 6" poly-bags, of about 1.5 years of age, are to be used. Under such situation orders may be placed officially (formally) with the nearby forest nursery at least 3 years ahead of the stipulated planting year, stating the number required species wise, with a tentative date of delivery solicited. The seedlings should never be transported from the nurseries to planting site, using tractor tailor, Niassimon, etc. The best mode of transporting seedlings is either by 'head load' or 'boat'. However the seedlings may be transported by slow moving smooth running pick-ups (to avoid jerks).

3. Spacing and planting technique

After the selection of planting site the following tasks need to be undertaken sequentially:

- The planting site is to be surveyed, maps prepared, plantation journal initiated and history of the planting site is recorded in the plantation journal. The names of the participants are to be recorded in the plantation journal for future reference.
- The planting site has to be cleared of unwanted bushes if any. The small vegetation such as grasses etc. should not be disturbed to avoid soil erosion of the embankment slopes. The bushes while being cleared should not be uprooted rather should be cut at ground level. The site should be cleared and made ready for planting without disturbing the soil and grass like vegetation on the ground.
- Stacking at the desired spacing of 2m x 2m should be done.
- All of these activities should be accomplished before April 1 i.e. before the first monsoon shower (by second week of April).

At every planting point (at the stacking point) pits are to be dug. The size of the pit should be 1ft by 1ft and the depth has to be 1.5 ft. The top half of the soil has to be put on the upper side (uphill) of the pit while the bottom half of the soil be put on one side (say on North) of the pit, but not on the down slope (downhill) side. This pit making work should be completed by the first week of April. ***The pits after being dug should be left open for about 15 days.***

Planting activities are to be started after 15 days of pit-making. Compost @ 3 Kg is to be put in each pit. Before planting the seedlings, the top soil from the up-slope side of the pit is to be placed at the bottom and the bottom soil from the side of the pit is to be placed on the top, so that the soil get turned over. Compost and all the soil in the pit are to be mixed properly, pulverized, all roots and foreign materials removed, so that 'seedling planting bed' looks nice, clean and ready. One seedling has to be planted in each 'seedling planting bed' so prepared. After 15 days of planting the seedling 70 to 75 grams of NPK (1:2:2) fertilizer should be applied in each pit. The fertilizers once mixed, must be used within 6 hours of mixing. Another dose of urea @ 25 gm per pit is to be applied after 2 months of planting.

Each and every operation must be recorded in the plantation journal, stating the duration of the operation with starting and ending dates, labor used, the then weather conditions, etc. for future use.

A word of caution: While planting the seedlings, the first thing to be identified is the locations of underground drainage pipes and planting of seedlings right on the top of that has to be meticulously avoided.

A schematic diagram of planting layout is as under (next page):


- One hectare = 10,000 Sq M Spacing 2 M x 2 M
- 3 Fruit spp. in 4 positions. The sequence will be "Narikal", "Khajoor", "Tal", "Khajoor" "Narikal", "Khajoor", "Tal", "Khajoor" & so on at 4M x 4M = 625 plants per Ha
- 6 Tree spp. = $(2500 - 625) = 1875$ plants per Hectare
- $1875/3 = 625$ plants (of each tree species) to be felled at 8th, 10th and 12th year
- Design for 20M x 20M (= 0.04 ha) area

Legend:

●	Fruit tree ("Narikal", "Khajoor", "Tal", "Khajoor")	4M x 4M = 625 plants per Ha
○	Tree spp to be felled at 8 th year	625 tree species such as Akashmoni & Gamar to be felled at 8 th year
●	Tree spp to be felled at 10 th year	625 tree species such as Chikrassi & Toon to be felled at 10 th year
●	Tree spp to be felled at 12 th year	625 tree species such as Neem & Mehagony to be felled at 12 th year

20M x 20M Plot

Showing 2M x 2M Grid

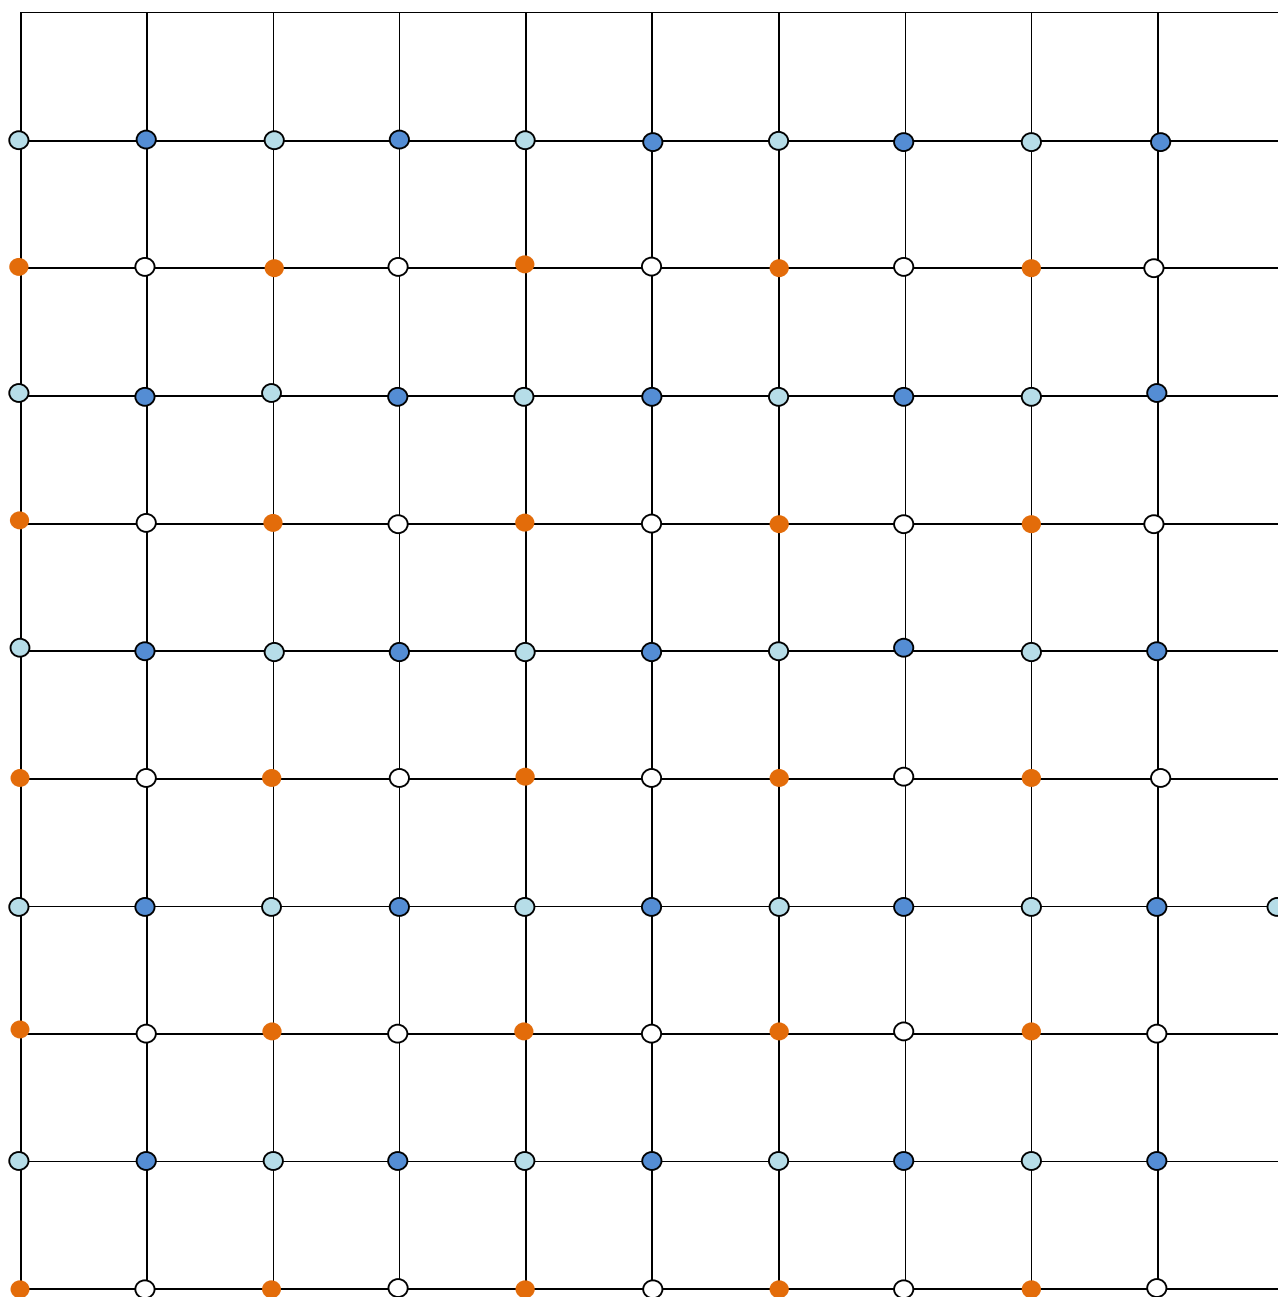

4. Rotation to be used

In case of these plantations, the planting will be initiated with about 10 species. Two of these species (Akashmoni & Gamar) the fastest growing ones will be felled (cut and extracted) in 8th year. Another two species namely Toon & Chikrassia, medium growing species will be felled in 10th year. The other two tree species namely Barapatar mehagony and Neem will be felled in 12th year. The other 3 fruit species (Narikal, Khajoor, Tal and Khajoor, at 4 positions) will continue to grow as long as they live at 4M x 4M spacing and yield fruits and juices for the participants. Thus there will be 4 types of rotations.

- 8 year rotation for tree species, Akashmoni & Gamar.
- 10 year rotation for species, Toon & Chikrassia.
- 12 year rotation for species, Barapatar mehagony and Neem.
- Life-long for fruit species, Narikal, Khajoor, Tal and Khajoor.

After 12 years, these plantations will virtually become orchards.

5. Cost estimates of establishing tree plantation per unit area

The cost of establishing one hectare of plantation including its maintenance to its final stage is calculated here under.

Plantation in one hectare - Planting of 2500 seedlings

	Item of works	Number of Labor required	Cost of Labor per day	Cost of Labor	Material Required & Rate in BDT	Cost of Material
	Cutting of bushes to be done by participants but they will get the wages.	3	450	1350		
	Layout by participants. They will get the wages.	2	450	900	Jute rope, no nylon rope. LS	100
	Inter cropping. Participants to do this on wages.	2	450	900	Arhar seeds 6 Kg @ of Taka 200/Kg	1200
	Procure stacks carry to planting site fix them at 2M x 2M spacing, including fastening of sapling with the stack. Participants to be involved on wages.	3	450	1350	Price of 2750 (10% more to cover wastages) Stack @ of Taka 4/stack & Shootly etc. complete.	11000
	Pit making, keeping the pits open for about 2 weeks. 2500 pits are required per hectare. Each MD will make 75 pits. This has to be done by the participants on wages.	34	450	15300		
	Price of 2875 (15% more to cover wastages) seedlings in 10"x6"				Price of each seedling @ of Taka	34500

	Item of works	Number of Labor required	Cost of Labor per day	Cost of Labor	Material Required & Rate in BDT	Cost of Material
	poly bags, including transportation.				12 each	
	Procure compost or decomposed cow-dung, carry these to planting site. Put back the soil in the pit, apply 3 Kg of compost / decomposed cow dung in each pit, pulverize the soil, mix it with compost / cow dung, remove all debris, root pieces (especially the roots of sun grasses), plant the seedlings by taking off the poly-bags carefully. Participants need to do this but on payment of wages.	20	450	9000	Price of 8250 Kg (10% more to cover wastages) of compost of decomposed cow dung @ Taka 4/Kg.	33000
	Weeding and cleaning immediately after planting. To be done by participants but on wages.	5				
	Application of fertilizers (N:P:K::1:2:2 ; 75 gm/pit) after 15 days of planting. Participants will do this but on payments.	10	450	4500	Price of 207 Kg (2500*0.075*1.1; 10% more to cover wastages) of fertilizer @ of Taka 40/Kg	8280
	Application of nitrogenous fertilizers (Urea 25 gm/pit) after two months of planting to be done by the participants but on wages. Fertilizer required (2500*0.025*1.1 =) 68.75 Kg including 10% wastages.	10	450	4500	Price of 68.75 Kg of fertilizer (Urea) @ Taka 40/Kg.	2750
	First year maintenance, 3-4 weeding and mulching	50	450	22500		
	Second year maintenance, 2-3 weeding, cleaning & vacancy filling. Price of 2500*0.1=250 @ BDT 12 each = 3000	40	450	18000	Price of 250 seedlings @ BDT 12 each	3000
	Third year maintenance, 1 - 2 weeding and pruning of tree spp. Only. The pruned branches will go to the participants	30	450	13500		
	Fourth year maintenance, climber cutting & cleaning.	20	450	9000		
	Fifth year maintenance, pruning of tree spp only not fruit tree. The pruned branches will go to the participants.	10	450	4500		

	Item of works	Number of Labor required	Cost of Labor per day	Cost of Labor	Material Required & Rate in BDT	Cost of Material
	Fixing of a plantation Board (may be RCC board).	2	450	900	LS per hectare	1000
	Miscellaneous					
	TOTAL	241		106200		94830
	Total cost per hectare including maintenance in BDT					201030

The total cost for establishing one hectare of plantation till its final stage is BDT 201,030.00 say 2.02 lakh. At the final stage i.e. after 12 years of raising the plantation it will become an orchard and the participants will keep on getting the benefits continuously.

Cost for raising Hijol and Payaara plantation:

Cost for raising Hijol (<i>Barringtonia acutangula</i>) plantation per Km	20,000 Taka/Km
Cost for raising Payaara (<i>Psidium guajava</i>) plantation per Hectare.	62,500 Taka/Ha

6. Plantation management or maintenance. (maintenance costs have been included in the plantation establishment costs)

Ideally the following maintenance program should be followed.

- Intercropping by agricultural crop, especially of leguminous species may be done during first 1 & half year.
- First year: three to four weeding and cleaning with vacancy filling & mulching.
- Second year: two to three weeding and cleaning with vacancy filling.
- Third year: One to two weeding. Pruning (first) lower 1/3rd of the bole of all TREE spp. Fruit species should not be pruned.
- Fourth year: Climber cutting and cleaning, etc.
- Fifth year: Pruning (second) lower 2/3rd of the bole of all TREE spp. Fruit species should not be pruned.

Hijol (*Barringtonia acutangula*) Plantation

Besides the establishment of the above stated plantation on the slope of the embankment, at the toe, along the village side a 2.5 Meter strip of land, that may remain inundated during monsoon, for about 3 to 6 months, shall have to be planted. This strip has to be planted with a fresh water wet land species. Thus a fresh water wet land species, which is likely to be attractive to the participants, has been identified. This could be Hijol

(Barringtonia acutangula) for this given site. One row of Hijol (Barringtonia acutangula) will be planted at a spacing of 4 meter, in this 2.5 meter wide strip. In every km, 250 such species will be planted. The cost of establishing such Hijol plantation will be about Taka 80 per plant. Thus the cost per km for raising Hijol plantation will be about Taka 20,000.00.

Payaara (*Psidium guajava*) Plantation

This Payaara (*Psidium guajava*) plantation will be established on the 9.95 Meter wide strip between the road and the river. The Payaara (*Psidium guajava*) plantation will be raised at 4 Meter by 4 Meter spacing. In every hectare 625 seedlings will be planted. The cost per hectare, for raising Payaara will be about Taka 62,500.00.

7. Yield prediction.

This prediction of yields is for a hectare. A total of 2500 seedlings will be planted over an area of one hectare. The following shows the assumptions used and yields predicted.

Yield Predictions

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
<i>Acacia auriculiformis</i> (Akashmoni) final felling at 8th yr.	Planted 312 seedlings in one Ha	250	125	250	13.75	110375		
	Survival rate 80%							
	1st pruning in 3rd year, each plant will yield 0.5 Kg of fuel-wood. Price of each KG of fuel-wood will be Taka 1							
	2nd pruning in 5th year. Each plant will yield 1 Kg of fuel-wood. Price of each KG of fuel-wood will be Taka 1							
	Final felling in 8th year. Each plant will yield 0.055 CuM of wood. Price of each Cu. M. wood on an average will be about Taka 8000							
<i>Gmelina arborea</i> (Gamar) final felling at 8th year.	Planted 313 seedlings in one Ha	219	109.5	219	10.95	82453.5		
	Survival rate 70%							
	1st pruning in 3rd year, each plant will yield 0.5 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1							
	2nd pruning in 5th year. Each plant will yield 1 Kg of fuel-wood. Price of							

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
	each Kg of fuelwood will be Taka 1							
	Final felling in 8th year. Each plant will yield 0.05 CuM of wood. Price of each Cu. M. of wood will be about Taka 7500							
Chickrassia tabularis (Chikrassia) final felling at 10th year	Planted 312 seedlings in one Ha	218	65.4	152.6	13.08	65618		
	Survival rate 70%							
	1st pruning in 3rd year, each plant will yield 0.3 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1							
	2nd pruning in 5th year. Each plant will yield 0.7 Kg of fuel-wood. Price of each KG of fuel-wood will be Taka 1							
	Final felling in 10th year . Each plant will yield 0.06 CuM of wood. Each Cu. M. of wood will fetch Taka 5000 .							
Cedrela toona (Toon) final felling at 10th year	Planted 313 seedlings in one Ha	219	65.7	153.3	13.14	92199		
	Survival rate 70%							
	1st pruning in 3rd year, each plant will							

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
	yield 0.3 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	2nd pruning in 5th year. Each plant will yield 0.7 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	Final felling in 10th year. Each plant will yield 0.06 CuM of wood. Price of each Cu. M. of wood will be Taka 7000 .							
<i>Swietenia macrophylla</i> (Mehagony) final felling at 12th year	Planted 312 seedlings in one Ha	188	56.4	75.2	13.16	105411.6		
	Survival rate 60%							
	1st pruning in 3rd year, each plant will yield 0.3 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	2nd pruning in 5th year. Each plant will yield 0.4 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	Final felling in 10th year. Each plant will yield 0.07 CuM of wood. Price of each Cu. M. wood will be Taka 8000 .							
<i>Melia indica</i> (Neem)	Planted 313 seedlings in one Ha	188	75.2	94	9.4	65969.2		

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
final felling at 12th year.								
	Survival rate 60%							
	1st pruning in 3rd year, each plant will yield 0.4 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	2nd pruning in 5th year. Each plant will yield 0.5 Kg of fuel-wood. Price of each Kg of fuel-wood will be Taka 1 .							
	Final felling in 10th year. Each plant will yield 0.05 CuM of wood. Price of each Cu. M. will be about Taka 7000 .							
Phoenix sylvestris (Khajoor) Juice production starts in 7th year	Planted 312 seedlings in one Ha	218					741200	From 7th year annual yield in Taka
	Survival rate 70%							
	Juice extraction will start from 7th year . Yearly yield 200 Kg per plant							
	200 Kg of juice will produce 20 Kg of gur . Excluding gur production costs, each Kg of gur will fetch Taka 170 .							

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
Cocos nucifera (Narikal) fruit production starts in 7th year	Planted 157 seedlings in one Ha	126					252000	From 7th year annual yield in Taka
	From 7th yr annually 200 fruits will be available. Price of each fruit will be about Taka 10 .							
Borassus flabellifer (Tal) Juice or fruit production starts in 12th year	Planted 156 seedlings in one Ha	109					218000	From 12th year annual yield in Taka
	Survival rate 70%							
	From 12th yr annually 100 Kg of juice will be available, which will produce 10 Kg of gur . Price of each Kg of gur excluding processing cost will be about Taka 200 .							
Psidium guajava Payaara Plantation	Planted 625 seedlings per hectare	438					525,600	From 4th year annual yield in Taka per Ha
	Survival rate 70%							
	From 4th year each tree will produce about 40 Kg of fruits which will fetch a price of Taka 30 per Kg .							

Plantation Types	Assumptions	No of plants survived per Ha	Fuel-wood production in 3rd yr per Ha in Kg	Fuel-wood production in 5th yr per Ha in Kg	Final yield in 8th, 10th & 12th year, in Cu. M. per Ha	Total final yield in Taka at 8th, 10th and 12 year per Ha	Fruit trees. Annual yield in Taka from 7th, 8th and 12th year per Ha.	Remarks
<i>Barringtonia acutangula</i> Hijol Plantation	Planted 250 seedlings per Km	175					17500	From 7th year annual yield in Taka per Km
	Survival rate 70%							
	From 7th year each tree will produce about 2 Khata, each will fetch a price of Taka 50							

Yield Predictions	
Descriptions	Taka
Total yield per Ha in Taka from the TREE CROPS during first 12 years	522,026
Annual yield/Ha from 7th year in Taka from Khajoor & Narikal	993,200
Annual yield/Ha from 12th year in Taka from Tal	218,000
Annual yield/Ha from 4th year in Taka from Payaara	525,600
Annual yield/Km from 7th year in Taka from Hijol	17,500

8. Participant involvement mechanism.

In case of Bangladesh, sustainability of project benefits (outputs), after the completion of the project very often get jeopardized, since none rightly shoulders the responsibility to take care of the plantations established under a project. The plantations, being a biological entity, will need to be taken care of on a routine basis for years after years. It is thus essential to associate some personnel with these plantations, so that they have some sort of ownerships and they take care of these plantations for years to come. Under such situation the best possible methods known till date, is to involve the local people as “participants” under a 'social forestry' context. The involvement of participants directly revolves around the tangible benefits that they can get from these plantations.

The yields from these plantations will be mostly as under.

1. Pruned branches in 3rd and 5th year of raising the plantation from forest tree species such as

- *Acacia auriculiformis* (Akashmoni)
- *Gmelina arborea* (Gamar)
- *Chickrassia tabularis* (Chikrassia)
- *Cedrela toona* (Toon)
- *Swietenia macrophylla* (Mahogany)
- *Melia indica* / *Azadirachta indica* (Neem)

2. Final yield of wood (timber, poles and some branches) forest tree species such as

- ***Acacia* auriculiformis** (Akashmoni) (after 8 years of planting)
- ***Gmelina arborea*** (Gamar) (after 8 years of planting)
- ***Chickrassia tabularis*** (Chikrassia) (after 10 years of planting)
- ***Cedrela toona*** (Toon) (after 10 years of planting)
- ***Swietenia macrophylla*** (Mahogany) (after 12 years of planting)
- ***Melia indica* / *Azadirachta indica*** (Neem) (after 12 years of planting)

3. Fruits from ***Psidium guajava*** (payaara)

4. Khatas from ***Barringtonia acutangula*** (Hijol)

5. Juices and fruits from:

- *Phoenix sylvestris* (Khajoor)
- *Cocos nucifera* (Narikal)
- *Borassus flabellifer* (Tal)

From 12th year of plantation establishment, these plantations will get transformed to orchards. The juice (from Khajur and Tal) and fruits (from Narikal and Tatal) will be continuously produced.

The participant selection process should be such so that sincere and effective personnel are identified as “participants”. In this connection the following guidelines may be used for the selection of participants.

Participant selection guidelines:

Under the present day context the protection of natural resources, especially tree resources have become a serious problem. Till date the general answer to solve this problem is ‘Social Forestry’ wherein the participants will be involved and they will actively protect these resources and in lieu of that they will share the benefits under agreements, with the land owning agency (in this case BWDB). These participants or the community will play the conspicuous role in protecting these plantations. The Social Forestry Rules 2010 (given in annexure 01), that the FD is using as such, though not binding for the BWDB to follow, can be of some use under this given context.

The criteria laid in the social forestry rules for selecting participants is to go for the poor and ultra poor people of the society. Because of the prevailing low living standards of the people in general, many of the people are eligible to be participants according to the criteria laid down in the ‘Social Forestry Rules 2010’. Though the criteria set in the rules are fine, the interferences by the influential personnel especially by the political people are very heavy and can hardly be mitigated. To avoid any underhand deal and to avoid external pressure, especially from political people, the participants may be selected through an open forum, in presence of the personnel from all concerned. This may be more transparent and acceptable to the members of the public.

The squatters, displaced due to land acquisition, river bank erosion, etc. should be given the priority while selecting participants for this program. Besides these while selecting participants, the people having privately owned lands adjoining the BWDB lands should also be taken into consideration. They have homesteads, agricultural lands, ponds, small wetlands, etc. in their privately owned lands adjoining the BWDB lands. These private land owners are very important towards the sustainability of the plantations that will be established under this given program. In some cases their role may be very vital as well. Under this situation all possible attempts must be lunched to let them be parties for the protection of these plantations. These people in some form or the other should be incorporated as participants’ associates, if not as actual participants, in this program and at the same time, necessary safe guard measures need to be incorporated, so that their involvements benefit the plantations established and ensure sustainability.

The following steps may be taken to select participants.

- The participants should be selected at least 6 months ahead of the initiation of the plantation activities.
- The concerned authorized personnel (may be the Executive Engineer) will prepare the work plan by January, for the participatory plantations to be undertaken during the financial year (where the plantation works will start in April next).
- This program of participatory afforestation should be announced among the nearby communities (hats and bazaars) by January.
- An application form has to be developed by the concerned authority, which will be used as the application form by the probable applicants. This form must be available to all concerned, free of costs by January.
- A public announcement has to be made through loud speakers in the local areas, especially in the local markets and **haats**, about the invitation of applications in prescribed format, for probable social forestry participants, elucidating the criteria

and selection process, by January-February. This announcement has to be given by the local authority (may be the Executive Engineer).

- The last date of receiving application may be March 15th.
- On receipt of the applications, the facts and information given in the applications may be verified by the locally, as best as possible, with assistance from the local Union Parishad by last week of March.
- One public meeting may be day long, will be arranged for every Union to finalize the participants for all plantations to be under taken within the jurisdiction of the given Union by the first week of April.
- The date and venue of such public meeting has to be well announced through loud speakers, in the given locality including the local **haats** and **bazars**. All the applicants from the given union will be requested to remain present in this meeting. This has to be done by the concerned local authority (may be the local Executive Engineer).
- The following personnel must be present in the above said public meeting.
 - The local Union Parishad (UP) chairman must be present in the meeting. He will also preside in the meeting.
 - The concerned local BWDB official may be an the Assistant Engineer of BWDB.
 - One BWDB official as representative of the concerned Executive Engineer.
 - Local UP members. (Three to four of them may be selected locally as signatories. While selecting such ward members, preference will be given to those nearby the plantation site).
 - Local elites. (Two of them will be locally nominated to function as signatories).
- The local BWDB official concerned will arrange all of these.
- All of these above mentioned 10 personnel will be the signatories in the final list of participants selected in the meeting.
- The UP chairman and the other 9 signatories may be given a small remuneration from the project funds.
- The final selection will be done in this meeting publicly. The local BWDB official may do the required home works in this connection. The final list of participants selected, plantation wise, has to be endorsed by the above mentioned 9 personnel by putting their signatures.
- The concerned local BWDB official will take the signatures of the participants on the agreement forms (the agreement form that the FD is using at present may be used by making small changes as required) at the closer of the meeting. The UP chairman will be the witness in each of these agreements.
- The final list will be announced in this public meeting. The name and the required details will be sent to the concerned BWDB authority (may be the Executive Engineer) to process the agreements. The agreements must be ready for delivery to the incumbents within 2 weeks from the date of this public meeting.

- A list of the selected participants, plantation wise will be sent to the concerned UNOs and DCs for their information.

This project will have budget allocations to provide remunerations to all the signatories, BWDB staff working on this issue and for the costs for holding meetings etc.

Benefit sharing mechanism

Once the participants are selected and finalized, plantation wise, they will be involved in the plantation establishment activities.

An agreement has got to be signed between the participant group and the BWDB. For every 5 hectare of plantation, a group of 10 participants will be identified. One agreement will be signed between each such group (of 10 participants) and the BWDB.

Benefit sharing arrangement will be as under:

The participant group (of 10) will get receive the following benefits:

- All the produce or yield of intercropped crop.
- The entire yield (branches etc.) from the first and second pruning of the trees.
- At the time of final felling of the trees at 8th, 10th and 12th year of the plantation; 75% of the total yield (or produce). Out of the rest, 20% will go to the BWDB, as their revenue or over head, 5% will go to the management committee.
- 75% of the entire yield (juices & fruits) from the fruit trees as they come under production. Out of the rest, 20% will go to the BWDB, as their revenue or over head, 5% will go to the management committee.

The participants will have the responsibilities to

- Protect the plantations,
- Maintain the plantation,
- All the participants (100 in number for this 50 hectare plantation) will constitute (may be through election, selection or nomination) a 5 member (Chairman 1, General secretary 1, Treasurer 1 and Members 2) Management Committee to oversee, ensure proper management and sustainability of the plantation established. The management committee will run the show by formulating by laws etc. including the management of the fund that will go to them.
- In association with the BWDB the management committee will lunch awareness programs, training programs, AIG programs etc. in future.

Annex E. ToR for Consulting Services for Preparation of Biodiversity Management Plan and Implementation of RBIP Monitoring Program

Citation in main text (Volume I): **Section 9.4.1.4.**

Background

The lower Brahmaputra, named Jamuna in Bangladesh is one of largest rivers in the World. Following its avulsion (change of course) into the present day Jamuna River during the late 17th century, it has been constantly migrating westward and additionally widened by 50% from 8 to 12 km since the 1970s. These morphological changes have led to the loss of about 88,000 ha of floodplain from 1973 to 2014, affecting the ecology and livelihood of the floodplain dwellers by displacing hundreds and thousands of people. In addition to unpredictable riverbank erosion, floods are the other major natural hazard. While typically 20% of the country is flooded during the annual monsoon, severe floods have inundated up to two thirds of the country.

The Government of Bangladesh through Bangladesh Water Development Board (BWDB) is preparing the River Bank Improvement Program (RBIP) to reconstruct the existing degraded embankment and secure it against riverbank erosion along 137 km length from the Teesta River to the Jamuna Bridge. The program will be designed and implemented in three phases. A 50 km long priority reach between Simla and Hasnapara will be protected in Phase 1. Phase 2 covers the remaining 87 km while Phase 3 focuses on and the construction of a highway on the countryside of the new flood embankment. The entire program will be implemented over a period of 10 years.

Objectives

The proposed RBIP program is located in an area of high biological diversity in which many important and endangered aquatic species are present. The Jamuna, its floodplains and stabilized chars are home to a wide variety of terrestrial and aquatic birds and is an important area for migrating birds (winter visitors). The program footprints due to construction of river training works and flood embankments, highway and associated developments are expected to affect the aquatic and floodplain habitat. Historically also the biodiversity of the Jamuna is under threat from natural morphological process and floods. The RBIP program has taken an approach to address the impacts associated with natural processes and also with the project activities by development of sanctuaries for protection of biodiversity. Development of such conservation areas is expected to restore the riverine ecology and biodiversity conservation and create highly needed reproduction, nursing and feeding areas for aquatic biota.

Baseline data has been collected along the right bank of the Jamuna during detailed design stage of Phase 1 of the program. However, a detailed and more comprehensive ecological baseline data needs to be collected along the entire reach of the Jamuna including its floodplains on both sides considering cumulative development in the region.

The other objective of this study is to conduct impact monitoring for fish catches and populations and biodiversity of fish, birds, dolphins, herpeto-fauna, and wetland trees following consistent methodologies so as to enable the project to assess key performance indicators.

Detailed Scope of the Study

Component 1: Baseline Studies

Detailed ecological studies will be carried out, during implementation of Phase 1, both within the Jamuna river boundaries and on the floodplains alongside both river banks to broaden the existing baseline data. The study will cover all aspects of aquatic and terrestrial ecology.

The data to be collected for terrestrial ecosystem are: natural vegetation in the floodplains and chars, riparian vegetation, wetland vegetation, recent trends in natural vegetation and threats, homestead vegetation, Terrestrial fauna; terrestrial wildlife species and their importance and status; identification of important wildlife habitats and their movement/migration pattern (especially for the wildlife that depends on the river for drinking and fishing, e.g. fishing cat); Recent trends (whether increasing or decreasing, key prevailing threats); and biodiversity including terrestrial Species diversity.

The data to be collected aquatic ecosystem are: ecology and plant community; abundance and distribution; growing period; recent trends (whether increasing or decreasing, key prevailing threats); aquatic fauna; aquatic wildlife species and their importance and status; identification of their habitats, breeding and migration patterns; wetland birds and recent trends; impact on aquatic wildlife from the project activity including short and long term impacts (impact from changed landuse, noise, human presence), utilization and recent trends (whether increasing or decreasing, key prevailing threats); and biodiversity (including aquatic Species diversity and recent trends).

Based on enhanced baseline data, the study will review the mitigation measures proposed for identified impacts, and update the mitigation measures and prepare additional management plans.

Component 2: Identification and Development of Conservation Areas

The EIA of Phase 1 has identified six potential sites of fish conservation and two locations of dolphin conservation in the priority area. The proposed study will confirm these locations and identify additional locations of conservation significance (in the river, and or chars/shoals or the floodplains) and prepare detailed conservation plans. These plans will be implemented during Phase 2. The sites will be identified for entire reach of the Jamuna river. The sites are to be identified in consultation with local community and relevant stakeholders. Detailed management plans will be prepared for each of the conservation areas.

The study will also prepare necessary implementation plans, construction drawings, bidding documents if any construction activities are required to implement the conservation plans. The consulting team is also responsible for supervision of the implementation activities and operation and management for conservation areas for first two years. These conservation areas will be handed over to the local community or relevant government departments for future maintenance. The study will also assess the possibility of developing ecotourism to generate revenue for the maintenance of the conservation areas and develop necessary plans to implement these plans.

Component 4: Capacity Building in Biodiversity

The study will prepare and implement capacity building programs for the BWDB implementation staff, construction workers, local community and relevant government

agencies for conservation and promotion of biodiversity in the program area. A capacity building plan will be submitted for approval of BWDB for its approval.

Component 4: Monitoring during construction and post construction

The impact monitoring will be carried out through assessing the impact monitoring of representative intervention and control sites in the working areas of both project phases – with the sites having already been covered by baseline, through to the end of project. Improvement or change of biodiversity due to the project interventions such as revetments, embankment, road construction and others will be ultimately determined comparing the present and past status of biodiversity in the area. The detailed methodology for monitoring program is given in Appendix 1.

Selection of the biodiversity monitoring sites by category and indicator groups to be monitored

Category		Water body Type	Birds	Fish catch	Herpeto-fauna	Vegetation	Dolphins
Location	Intervention						
Potential impact area	Main interventions (revetment, embankment, road)	Jamuna River/Chars	Y	Y	Y	Y	Y
		Beel/flood plain	Y	Y	Y	Y	
		Canal/linking river		Y	Y		
	Other interventions (Regulators, culverts, fish passes, markets, ramps, crossings, etc.)	Beel/flood plain	Y	Y	Y	Y	
		Canal/linking river		Y	Y	Y	
		Jamuna river/chars	Y	Y	Y	Y	Y
	Cumulative impact area	Left bank	Y	Y	Y	Y	Y
		Down stream	Y	Y			
		Up stream	Y	Y			
		Country side	Y		Y	Y	
Control area	No project interventions	Beel/flood plain	Y	Y	Y	Y	
		Chars	Y	Y	Y	Y	Y
		Jamuna River	Y	Y	Y		Y

Time frame

The baseline study will be carried out over a period of one after covering all seasons. The development of conservation areas will be carried out in the second year. The monitoring will be carried out during the entire construction period and for two years after the construction period. Detailed terms of reference for the consultant input will be developed by PMU during initial stages of project implementation.

Appendix 1 (of Annex E)

Proposed Methodology for monitoring of Fish catches and diversity

For impact monitoring of RBIP intervention on “Fish Catch and Species Diversity” Catch Assessment Study will be undertaken in the RBIP intervened and controlled water bodies. Baseline data on Catch, fishing effort and species diversity of those water bodies are available. CPUE (Catch per Unit of Effort) of different fishing gears (Fishing Unit), total number of fishing units in operation and the number of species in the catch and their intensity/relative abundance of different species in the catch (to be determined by Shanon Index) will be the measurable indicators of the project interventions on fish catches species diversity.

CPUE:

CPUE is generally defined as quantity of fish caught by a defined fishing unit of a particular type of fishing gear during a defined type period (An hour or a day etc.).

Fishing Unit:

Fishing unit is a fishing enterprise, which coincide with the ‘fishing economic unit consisting of the fishing craft (if used), fishing gear and fishers (Bazigos, 1974). The fishing unit/economic units will be also considered under two categories: (i) the usual fishing unit (UFU), composed of the boat, fishing gear and the fishers necessary to carry out the fishing operation; and (ii) a minor fishing unit, composed of fishing gears and fishers (without a fishing boat).

Fisher/fisherman

Anybody operating a gear will be considered as a fisherman and each of the gear will be considered as a single fishing unit.

Catch assessment survey

Catch assessment including gear survey will be performed in each of the intervention and control sites at 10 (ten) days interval on sampling basis by following methods:

- Fishing Effort Survey (FES) and Catch Assessment Survey (CAS) will be conducted on the sampling day for 24 hours from 6 a.m. to 6 a.m. on the next day in two shifts (1) Day shift and (2) night shift. Anybody operating a gear will be considered as a fisherman and each of the gear will be considered as a single fishing unit. Day catch will be monitored and recorded by all time observation, while the night catch will be observed and recorded in the following morning in the fishing ground or landing centre.
- All different types of fishing gear/fishing unit will be studied on sampling basis selected randomly, with fishers interviewed on each sampling day and data on the gear type, its length, width and mesh size, mode of operation, duration of fishing per day will be collected and recorded. Name of fisher. Number of fish and weight (gram) of the catch will be recorded by using a single pan balance.
- On the sampling day all different types (categories) of fishing gears/efforts (fishing unit) in operation on that day in specified area (part or entire water body) will be surveyed/counted and recorded as per Form-1. Then from each category of fishing gear (fishing unit), sample fishing unit selected at random will be studied

for catch and effort data as per Form-2. Number of Katha (Brush shelter) under fishing (if any) and their catch will be recorded separately by species for inclusion in the catch of the water body. If the observed catch is in large quantity, then a sample of the observed catch will be taken randomly and species-wise number and weight of the fishes in the sample will be recorded as per Form-2. Number of sampling fishing unit to be studied will be selected on the following principals:

Total no. of fishing units of a particular type in operation on sampling day		No. of fishing units to be studied for each type of gear in operation
1	1 – 3 nos.	All fishing units in operation
2	4 – 10 nos.	3 fishing units
3	11–30 Nos.	4 -5 fishing units
4	31 and above	10% of the total units with minimum 5 units.

The data will be analyzed statistically by using SPSS method for estimating CPUE, species-wise catch on monthly, quarterly and finally yearly basis. CPUE will be estimated based on the weight of fish caught during a fishing day (Catch per day per fishing unit).

Fish species diversity will be obtained from the species-wise catch data by number and weight.

Form 1

IMPACT MONITORING – CATCH ASSESSMENT (RBIP)

Format for Fishing Effort Survey (Gear Survey)

Biologist :

Location:

Date :

Upazila:

Site No.:

District:

Site :

Habitat: Beel/River/F. Plain/Chars/Other specify

Sl. No.	Gear Type (Name)	Observed Number and Time					Comments
		With Boat (√)	Without Boat (√)	Katha fishing (√)	Fishing period		
					Start time	End time	
1							
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

Form - 2
CATCH ASSESSMENT FORMAT
Impact Monitoring of RBIP

Fish Catch Assessment Form

Day/Night Catch

Site: _____

Habitat:

Date (Code: River-1, Canal-2, Beel-3, Floodplain-4, Char-5)

1. Information about Gear and Fishermen type

1.1 Gear: _____ 1.2 No. of Gear: _____ 1.3 Length (m):

1.4 Width (m): 1.5 Diameter (m): 1.6 Mesh size

1.7 Craft/boat: Boat/Donga

1.8 Fishers type: Professional/full time/part-time/subsistence

1.9 No. of person (Fishers): Male _____ Female _____ Total _____

1.10 Name of the Fisher(Head): _____ 1.11 Villages: _____

1.12 Total number of this type of gear operated today:

2. Fishing time

2.1 Fishing began at: 2.3 Time spent for present catch

2.2 Time of observation: 2.4 Observed catch (weight gm)

2.5 Expected to end at: 2.6 Expected fishing hour:

3. Species, number and weight (gm) of observed catch:

(a) Species composition from total observed catch or sample (code): (code: Total catch=5, sample=6)

(b) Weight of sample of observed catch:

Species (Code)	Number	Weight	Species (Code)	Number	Weight
Bangla		ev		arc	

4. Fishing rights (code):

Name of Enumerator: _____

Fishing right Code, License-7, Permit-8, Leases-9, Free-10

List of Fishes (Species Code)	
Carp Species	41. Ranga Chanda,
1. Rui	42. Gol Chanda,
2. Catla	43. Lamba Chanda
3. Mrigel	44. Tapa, Potka
4. Kalibaus	45. Pabda,
5. Ghonia	46. Madu pabda,
6. Common carp (Carpio)	47. Kani pabda
7. Mirror Carp	48. Gutum,
Snake Head	49. Gora gutom/Guchi Gutom
8. Soal	50. Naftani
9. Gojar	51. Chela,
10. Taki, Cheng Taki	52. Chep chela,
11. Telo Taki	53. Nerkeli chela
	54. Moa
Live Fish/ Cat fish/Featherback	55. Sar punti(Desi)
12 Koi	56. Tin Choka
13 Sing	57. Rani
14. Magur	58. Tatkini,Bata
15 .Boal	59. Chapila/Mamoli chapila
16. Air	60 Kuchia
17 Baghair	61. Senia (Eusufi)
18. Chital	62. Bacha
19. Foli	63. Hilsa (Jatka)
20. Rita	64 Baspata
	65. Kazuli
Small Fishes	66. Chaka/Gangina
21. Jat punti,	67. Dela

22. Tit punti,	68. Kachki
23. Jhili punti,	69. Shilong
24. Futani Punti	70. Ghaura
25. Khalisa	71. Peali
26. Tengra,	72. Poa
27. Bujuri Tengra	73. Batasi
28. Icha,/Gura Icha/Chingri	74. Tapasi
29. Galda Chingri	75. Chewa
30. Kaikla	76. Anju
31. Guchi Baim	77. Baicha
32. Tara Baim	78. Kanpona
33. Sal Baim	79. Mola
34. Bele,	80. Meni/Bedi/Roina
35. Gugri Bila	
36. Darkina	
37. Khalisa,	
38. Chuna Khalisa,	
39. Lal khalisa	
40. Chanda,	

Methodology for monitoring of Dolphins

The following major activities will be carried out for monitoring of dolphins:

- Survey and monitoring of dolphin population
- This project aims to thorough survey dolphin population at specified transact line along the Jamuna river at regular interval. The preliminary information will come from the baseline monitoring reports and consultation with the experts involved with the baseline study. It will help to design the survey. A three man team will be formed for the survey. A medium to large-sized engine boat will be used for counting of dolphins in the rivers. The survey team will visit dolphin transact line and spotted the dolphin population. Usually three observers used to participate in dolphin count: one stationed on left-side of the boat, one in front and the third one on right side of the boat. Sometimes, four observers participated in the dolphin count. On each side (left or right) of the boat, the observers/counters covered particularly during monsoon, 500 meters open eye. The survey will be conducted in two periods – one in monsoon (August-October) and the other in dry season (January-February) in each year. So, one survey in monsoon (August – October) and two survey in dry seasons (Jan-Feb and Jan-Feb) will be conducted.

- Identification of dolphin hotspots: The survey team will count dolphin population at hotspots area which are already been identified in the baseline study and they will also monitor the population status and threats of their habitat and food and feeding behavior. Furthermore the team will also search the newly dolphin hotspots which are not identified in and around the transact area.
- GIS mapping: All information will be transferred into GIS database and maps produced to make a comparison between the past and present distribution scenario and to evaluate the threats and habitat, movement, nesting sites, etc.,

Methodology for monitoring of Herpetofauna

Herpetofauna include Amphibia (frogs and toads) and Reptilia (turtles and tortoises, lizards, snakes and crocodilians). The RBIP include four major habitat categories : (1) wetlands/water bodies (beels, Rivers and ponds) (2) agricultural lands (iii) settlements/homesteads; and (iv) grass lands and char areas. So, both terrestrial and wetland habitats particularly broadcast aman rice plots (deepwater rice) and grasslands chars within RBIP location will be considered for the survey as specified in the baseline study. Best time for Herpetofauna survey is rainy season. However, for more specific study, the survey team will count species in two season (monsoon and dry).

The broad activities for the herpetological survey are as follows:

- Literature review
- Identifying the transact line or specific site within RBIP project location and traversing for direct sighting of species by the survey team
- Data collection of herpetofauna in two season (monsoon and dry). Survey will done by at early morning and night at selected transects
- Preservation and taking photograph of uncommon herpetofauna for identification
- Discussion with local community people, local snake charmers and other stakeholders for identification of uncommon herpetofauna
- Data analysis and GIS Mapping of the survey area and transact line

Methodology for monitoring of Birds and Water birds

The bird survey will be carried out through field survey by applying different survey methods namely strip transact sampling, point sampling, opportunistic survey, focus group discussion methods in the identified transact line and some other project site where baseline monitoring survey was done; the methods are described in brief:

- **Strip Transect Sampling:** Strip transect sampling (Buckland *et al.* 2001) was found most suitable to estimate the population density. In this method the observer(s) slowly walk on a relatively straight line through the study area and count the objects from both sides. The initial location of the object is always considered, because the object is might move away after watching the observer(s). If any object is sighted beyond the pre-decided observation-range, or if the object is coming from the back (in order to avoid duplication), the observation is not recorded. The survey is conducted in early morning and late afternoons when the

birds are most active. Transects are located in areas which are suitable in terms of observation in each study site.

- **Opportunistic survey:** In opportunistic survey, any important or interesting observation/information is recorded at any time while in the field. This method is suitable for recording the occurrences, relative abundance and distribution of different species of birds and other birds.
- **Focus group discussion:** Focus Group Discussion will be conducted in monitoring sites for gathering information on bird habitat condition, availability and seasonality of birds, migration of birds, etc.

Major Activities for bird monitoring:

- Preparation of detail work plan and methodologies through consultation with team members and experts and literature review.
- Bird survey in two seasons (post-monsoon (November) and dry (January)) in the identified transects line. Two surveys in winter (Jan and Jan) and one survey in post monsoon (Nov) will be carried out.
- Data compilation and threats identification
- Comparison of the data with previous census data and impact the rationality
- Identification of the major hotspots of birds in the project sites

Wetland trees monitoring

Success of wetland tree plantation will be evaluated based on survival percentage (i.e., plantation establishment) through sample survey where plantation has been established by the project. The monitoring will be done for two different types of plantations: (1) for the trees planted surrounding the water bodies (Table 1) and (2) for distributed seedlings among the household (Table 2) in the project site. The data will be collected twice a year (one before monsoon and another in dry season).

For evaluating tree plantations surrounding water bodies, initially baseline information of density (number of seedlings planted in a given area), diversity, average height and average collar diameter along the strips (if available) will be collected from the baseline reports and from project personnel. The present density, diversity, height and collar diameter will be collected through sample survey in the project sites by following simple random sampling procedure. The sampling intensity will be 10% (of the area) in the control sites and the intervened sites. For example, for canal plantation, the density will be measured per kilometer (Km) basis and the success and failure will be evaluated on the basis of survival percentage (the Table 1). On top of that, diversity, average height and average collar diameter will be calculated through sample survey.

For evaluating seedling distributed to the households, number of seedlings distributed per household will be collected from project reports and their survival percentage will be evaluated. The growth related data (height and collar dia) will be collected. Performance will be investigated through sample field survey by following simple random sampling with a sampling intensity of 10%.

Table 1: For monitoring trees and other vegetation surrounding water bodies

Items	Baseline		Impact study		Monitoring Success/Failure
	Control sites	Intervened sites	Control sites	Intervened sites	
Number of seedlings/Km (Density)	baseline report, project personnel	baseline report	Sample survey	Sample survey	Survival percentage 80% and above- successful plantation 60%-less than 80%- Moderate Below 60%- Poor
Diversity	baseline report, project personnel	baseline report	Sample survey	Sample survey	Higher diversity is desired
Average height (m)	baseline report, project personnel	baseline report	Sample survey	Sample survey	Growth performance
Average collar diameter (cm)	baseline report, project personnel	baseline report	Sample survey	Sample survey	Growth performance

Table 2: For monitoring trees distributed to the households

Items	Baseline (if available)	Impact study	Monitoring Success/Failure
Number of seedlings/household	baseline report, project personnel	Sample survey (10% sampling intensity)	Survival percentage 80% and above- successful plantation 60%-less than 80%- Moderate Below 60%- Poor
Average height (m)	baseline report, project personnel	Sample survey	Growth performance
Average collar diameter (cm)	baseline report, project personnel	Sample survey	Growth performance

Methodology for Participatory monitoring

Participatory biodiversity monitoring team will be formed and trained. The major activities to be carried out are as follows.

a. Development of participatory monitoring tools

- The monitoring methods and formats used for the monitoring of fish, birds, herpetofauna, trees and dolphins under this study will be customized for the members of the BMOs (Beel Monitoring Organization) who will undertake biodiversity monitoring of indicator species in future. The formats will be finalized through consultation with BMOs and pilot testing in the area.
- Matrix will be developed for all indicator faunal species showing the basic characteristics of the species in the project sites. The matrix will be used by the participatory monitoring team for identification of the indicator species during biodiversity monitoring survey. A sample of the matrix is shown below.

Name of the Indicator bird species	Food and habitat	Identification Characteristics	Status	Bird's Calling	Census time	Status without this species (red line)	
E-Purple Swamphen S-<i>Porphyrio porphyrio</i> L-Kalim/Kayem	-Resident bird of Bangladesh -Largely feed on aquatic vegetation insects, small fishes and larvae -Builds nests inside the reed of elevated land of the haor	Easily identifiable	-Once it was widely found in most of the wetlands of Bangladesh. -Hard to be seen anywhere except in the haor	Can be easily identified by its calling	All around the year	-Decreasing of this species indicates reducing the reeds of the haor -Not only Purple swamphen but also other birds, small mammals, frog, turtle/tortoise and fish will be reduced in numbers as it is suitable for their breeding	Photo

Fish				
Species	Food and habitat	Status without this species (red line)		
E- <i>Rohi or Rohu</i> S-<i>Labeo rohita</i> L-Rou	-Natural breeding center. -Rapidly growing -Survival of this fish is interlinked with the depth of water -Thousands of fishermen sustain their livelihoods by Rohu fishing.	-If this fish decreases in the Tanguar Haor area, Bangladesh's most prosperous breeding centre, the whole biodiversity of this area would be affected. - Living standards of the fishermen will decline - Protein crisis might occur		photo

Code: E- English name; S- Scientific name; L-Local name

For data collection, separate format will be developed for the participatory monitoring team. A sample of participatory biodiversity monitoring format, which are being used in Tanguar Haor, Sunamganj, is given as follows.

Bird's name	Number	Obtained marks
Purple Swamphen	Census data:	Marks:.....
Marking guidelines: 0%=1, 1-40%=2, 41-60%=3, 61-79%=4, 80%>=5		
Formula of result calculation: $7000 \times 100 / 10,000 = 70\%$ = if 7,000 birds seen in one census, Marks=3		
Purple Swamphen= If 10,000 individuals are seen=100%= No management is required in case of scored more than 80% (5) marks If scored 4 management is going well If scored 3 management is required If scored 2 management is going down In case of not seen Red Line's causes are clear		

b. Capacity building of biodiversity monitoring team:

The interested members of BMOs having basic education skill will be selected for the biodiversity monitoring team. Several teams (each comprising of three educated local people interested in birds/nature conservation from villages/union) will be formed for the monitoring task. Local school teachers or even the students of schools and colleges could be considered for the team. The teams will be given training with field sessions so that they can collect, analyze/ interpret and present the biodiversity monitoring information.

Annex F. List of Khals and Beels with Recommended Improvements

Citation in main text (Volume I): **Section 9.4.1.6.**

Table 1: List of water bodies and enhancement measures needed to ensure functional connectivity between floodplain and the Jamuna river

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
1	Bahuli Khal	89.66168	24.47354	Connectivity with Jamuna has been blocked by the BWDB embankment at Diarbari of Khoksha union, Kajipur Sirajganj	It is connected with Jamuna at Nolka	Have to be connected with the nearest canals that opened to the Jamuna river.
2	Bagdumur Khal	89.69330	24.39480	Connectivity with Jamuna has been blocked by the BWDB embankment	Dried up during dry season	Have to be connected with the nearest canals that opened to the Jamuna river.
3	Icamoti river	89.61576	24.48196	It is originated from Jamuna at Sariakandi , Bogra and falls into the Hurasagar at Baghabari, Pabna	Some parts of its dried up during dry season	Fish pass needs at this position
4	Bera daho	89.69330	24.39480	It is blessed with water from Jamuna, Sariakandi, Bogra and connected with Jamuna again at Baghabari, Pabna through Nolka river	Dried up during dry season	Re-excavation needed
5	Laxmi kola daho	89.55251	24.51404	It is blessed with water from Jamuna, Sariakandi, Bogra and connected with Jamuna again at Baghabari, Pabna through Nolka river		Re-excavation needed
6	Boilar beel			It is blessed with water from Jamuna, Sariakandi, Bogra	Rich in fish biodiversity and support livelihood to the surrounding people	Re-excavation needed
7	Fuljhor river	89.53297		It is blessed with water from Jamuna, Sariakandi, Bogra and connected with Jamuna again at Baghabari, Pabna through Nolka river		Re-excavation needed

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
8	Degree para khal (Icamoti river)	89.67097	24.53584	Connectivity with Jamuna has been blocked by the BWDB embankment at Balighugri of Channgacha, sadar, Sirajganj Water start to flow from Balighugri of Channgacha, sadar, Sirajganj and it meets with Nolka river and finally falls into Jamuna again at Baghabari, Pabna	Dried up during dry season at different places	The proposed Balighugri Fish pass will facilitate water flow throughout the year. Re-excavation needed.
9	Degree para khal (Icamoti river)	89.67140	24.53576	Connectivity with Jamuna has been blocked by the BWDB embankment at Balighugri of Channgacha, sadar, Sirajganj Water start to flow from Balighugri of Channgacha, sadar, Sirajganj and it meets with Nolka river and finally falls into Jamuna again at Baghabari, Pabna	Dried up during dry season at different places	The proposed Balighugri Fish pass will facilitate water flow throughout the year. Re-excavation needed.
10	Degree para khal (Icamoti river)	89.67079	24.53590	Connectivity with Jamuna has been blocked by the BWDB embankment at Balighugri of Channgacha, sadar, Sirajganj Water start to flow from Balighugri of Channgacha, sadar, Sirajganj and it meets with Nolka river and finally falls into Jamuna again at Baghabari, Pabna	Dried up during dry season at different places	The proposed Balighugri Fish pass will facilitate water flow throughout the year. Re-excavation needed.
11	Aminpur beel	89.65938	24.54013	It is blessed with water from Icamoti river		The proposed Balighugri Fish pass will enrich its fish biodiversity and overall agricultural production. Re-excavation needed.
12	Dattabari Daho	89.63949	24.54805	Durind rainy season it gets water		The proposed Balighugri Fish

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
				from Icamoti river and connected with Baghbatl beel		pass will facilitate more water to it. Re-excavation needed.
13	Bahuka khal	89.65561	24.56011	Connectivity with Jamuna has been blocked by the BWDB embankment near Bahuka bazar of Ratankandi, sadar, Sirajganj Water start to flow from Bahuka bazar of Ratankandi , sadar, Sirajganj and it meets with Nolka river and finally falls into Jamuna again at Baghabari, Pabna The khal is divided into two branches in this point ; 1. One branch meet again with the degree para khal (Icamoti river) 2. The second part falls into the Jamuna at Baghabari , Pabna	Dried up during dry season at different places	If the wanted regulator is constructed water flow will be normal, Need to re-excavate.
14	Bahuka khal	89.65595	24.56020	Connectivity with Jamuna has been blocked by the BWDB embankment near Bahuka bazar of Ratankandi, sadar, Sirajganj Water start to flow from Bahuka bazar of Ratankandi , sadar, Sirajganj and it meets with Nolka river and finally falls into Jamuna again at Baghabari, Pabna The khal is divided into two branches in this point ; 1. One branch meet again with the degree para khal (Icamoti river) 2. The second part falls into the Jamuna at Baghabari , Pabna	Dried up during dry season at different places	If proposed regulator is constructed water flow will be normal.
15	Bahuka- Gojaria khal	89.65436	24.56743	Connectivity with Jamuna has been blocked by the BWDB embankment	Dried up during dry season at different places	If they wanted regulator is constructed water flow will be

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
				near Chowdhury bari, Ratankandi, sadar, Sirajganj		normal Need re-excavation about 1.5 km from Chowdhurybari
16	Gojaria khal (Part of Bahuka khal)	89.64542	24.55981	Connectivity with Jamuna has been blocked by the BWDB embankment near Chowdhury bari, Ratankandi, sadar, Sirajganj	Dried up during dry season at different places	If the wanted regulator is constructed water flow will be normal
17	Soratol Khal	89.63643	24.56538	Connectivity with Jamuna has been blocked by the BWDB embankment at Suvogacha, Ratankandi, sadar, Sirajganj Get water from Banaijan khal and have connection with Icamoti river	Dried up during dry season at different places	The proposed Ratankandi culvert will facilitate water flow to it
18	Khamar gati khal	89.62269	24.55285	It gets water from Bahuka- Gojaria khal and meets with Icamoti river through Brammagacha	Dried up during dry season at different places	If proposed Bahuka regulator is constructed water flow will be normal
19	Bahuka- Gojaria khal	89.62292	24.54940		Water flow and depth quite well in this point	
20	Baghbatl beel	89.61644	24.53864	It gets water from Bahuka- Gojaria khal and Icamoti river during rainy season	Perinnial beel	If proposed Bahuka regulator is constructed water flow will be normal
21	Baghbatl beel	89.61102	24.53899			Re-excavation needed.
22	Icamoti river	89.60017	24.54520			Re-excavation needed.
23	Icamoti river	89.59996	24.54534			Re-excavation needed.
24	Icamoti river	89.59985	24.54542			Re-excavation needed.
25	Icamoti river	89.59874	24.54614			Re-excavation needed.
26	Icamoti river	89.61088	24.53813			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
27	Baghbat beel	89.61063	24.53795			Re-excavation needed.
28	Baghbat beel	89.64029	24.52005			Re-excavation needed.
29	Dublai beel	89.63970	24.51554	It gets water from Icamoti river during rainy season	Rich in fish biodiversity and support livelihood to the surrounding people	Re-excavation needed.
30	Pata beel	89.64901	24.53479	It gets water from Icamoti river during rainy season	Rich in fish biodiversity and support livelihood to the surrounding people	Re-excavation needed.
31	Bandhob beel	89.65004	24.53060			Re-excavation needed.
32	Badaila beel	89.66149	24.50610	No existence	No existence	-
33	Chilgacha bridge	89.64003	24.58013	Get water from Banaijan khal and moves towards Soratol khal		Re-excavation needed.
34	Banaijan khal	89.64654	24.59599	Starting point of Banaijan Khal		Re-excavation needed.
35	Kurala Beel	89.64363	24.59636	No existence; converted into agriculture land		Re-excavation needed.
36	Patagram Khal (Baoikhola khal)	89.64182	24.60700			Re-excavation needed.
37	Dublai beel	89.64348	24.62118	Get water from Banaijan khal	Rich in fish biodiversity and support livelihood to the surrounding people	If proposed Bahuka regulator is constructed water flow will be normal
38	Hunahanthor beel	89.64160	24.60024	Get water from Banaijan khal		If proposed Bahuka regulator is constructed water flow will be normal
39	Paikertali Daho	89.64005	24.66932	Connectivity with Jamuna has been blocked by the BWDB embankment		Re-excavation needed.
40	Halot khal	89.63930	24.66793	Connectivity with Jamuna has been blocked by the BWDB embankment , connected with Banaijan khal		Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
41	Halot khal	89.63876	24.66695			Re-excavation needed.
42	Halot khal	89.63840	24.66523			Re-excavation needed.
43	Halot khal	89.63799	24.66519			Re-excavation needed.
44	Halot khal	89.63773	24.66519			Re-excavation needed.
45	Kunkunia Daho	89.63309	24.66938	Closed water body		Re-excavation needed.
46	Kunkunia Daho	89.63256	24.66942	Closed water body		Re-excavation needed.
47	Kunkunia Daho	89.63266	24.67018	Closed water body		Re-excavation needed.
48	Kunkunia Daho	89.63325	24.67039	Closed water body		Re-excavation needed.
49	Kunkunia Daho	89.63406	24.67013	Closed water body		Re-excavation needed.
50	Kunkunia Daho	89.63538	24.66955	Closed water body		Re-excavation needed.
51	Chalita Danga Daho	89.60832	24.66266	Closed water body		Re-excavation needed.
52	Paroli beel	89.60061	24.66002			Re-excavation needed.
53	Paroli beel	89.60047	24.66017			Re-excavation needed.
54	Paroli beel	89.60023	24.66034			Re-excavation needed.
55	Paroli beel	89.59675	24.65963			Re-excavation needed.
56	Paroli beel	89.59365	24.65883			Re-excavation needed.
57	Sonamukhi river	89.56406	24.65128			Re-excavation needed.
58	Paikpara kola	89.55166	24.66154	Connect with Icamoti river during rainy season		Re-excavation needed.
59	Chokibari khal	89.55060	24.65016			Re-excavation needed.
60	Chokibari khal	89.55059	24.64899			Re-excavation needed.
61	Chokibari khal	89.55098	24.64590			Re-excavation needed.
62	Sonamukhi river (Icamoti river)	89.55133	24.64374			Re-excavation needed.
63	Sholli beel	89.54406	24.64648	No connection with Jamuna and Icamoti River		Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
64	Icamoti river	89.55570	24.63639			Re-excavation needed.
65	Icamoti river	89.55935	24.62645			Re-excavation needed.
66	Chatla beel	89.56878	24.60757	Connected with Icamoti		Re-excavation needed.
67	Sonaidanga beel	89.58535	24.59346	Connected with Icamoti		Re-excavation needed.
68	Icamoti river	89.58594	24.60362			Re-excavation needed.
69	Icamoti river	89.59377	24.61765			Re-excavation needed.
70	Kachihara khal	89.59588	24.62603	Get water from Kachihara beel and fall into Icamoti during rainy season water	Dried up during dry season at different places	Re-excavation needed.
71	Kachihara khal	89.59881	24.62541			Re-excavation needed.
72	Kachihara khal	89.59941	24.62706			Re-excavation needed.
73	Kachihara khal	89.60216	24.62624			Re-excavation needed.
74	Aziz morar Daho	89.61810	24.62626	Connected with Dublai beel		Re-excavation needed.
75	Gandhail Daho	89.63000	24.60845			Re-excavation needed.
76	Gandhail Daho	89.63804	24.60125			Re-excavation needed.
77	Khokshabari daho	89.68393	24.47791			Re-excavation needed.
78	Khalifa potti Daho	89.68366	24.48085			Re-excavation needed.
79	Khalifa potti Daho	89.68349	24.48325			Re-excavation needed.
80	Khalifa potti Daho	89.67703	24.49436			Re-excavation needed.
81	Icamoti river	89.59623	24.54525			Re-excavation needed.
82	Koiccha beel	89.58709	24.54177	Once connected with Icamoti river		Re-excavation needed.
83	Kali bari beel	89.57187	24.53009	Connected with Brammagacha river		Re-excavation needed.
84	Chandpur daho	89.56605	24.52730	Connected with Jugi Daho		Re-excavation needed.
85	Jugi daho	89.55717	24.52691	Connected with Laxikhola Daho and Fuljhor river		Re-excavation needed.
86	Jugi daho	89.55634	24.52602			Re-excavation needed.
87	Laxmikhola Daho	89.55362	24.51917	Connected with B6 and B 7		Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
88	Taltola Khal	89.54434	24.52985	Connected with Nolka river		Re-excavation needed.
89	Bailar daho	89.55395	24.54366	Connected with Nolka river through Jugidaho		Re-excavation needed.
90	Sholir daho	89.56019	24.54623	Get water from Kutubpur, Sariakandi, Bogra		Re-excavation needed.
91	Mahishgari beel	89.56265	24.54375	Connected with Jamuna river		Re-excavation needed.
92	HurJapanna beel	500 m south from 902		get water from Jamuna and moves towards Nolka	500 m south from 902	Re-excavation needed.
93	Muchi daho	89.56610	24.56032	Connect with Sadir daho and Boga daho		Re-excavation needed.
94	Gobindapur danga	89.56467	24.56400	Closed		Re-excavation needed.
95	Sadir daho	89.55871	24.57404	Connected with Fuljhor river	all type of fishes are found here	Re-excavation needed.
96	Barobari dado	89.55066	24.59087	Connected with Sadir daho		Re-excavation needed.
97	Maizlani daho	89.54302	24.59458	Connected with Fuljhor river and Icamoti river		Re-excavation needed.
98	Satdaho beel	89.55683	24.60296	Connected with gopal nagor daho		Re-excavation needed.
99	Satdaho beel	89.55952	24.60139			Re-excavation needed.
100	Satdaho beel	89.56291	24.60199			Re-excavation needed.
101	Satdaho beel	89.56405	24.60365			Re-excavation needed.
102	Dakhir beel	89.56720	24.60855			Re-excavation needed.
103	Rudrabaria daho	89.52444	24.59469	Closed		Re-excavation needed.
104	Tangrakhali daho	89.50934	24.59763	Connected with Rudrabaria daho		Re-excavation needed.
105	Rudrabaria-Pirahati pond	89.52641	24.59951	Closed		Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
106	Baliadanga beel	89.52418	24.60518	Closed; once connected with Bau and Bangali river		Re-excavation needed.
107	Shitola beel	89.52383	24.61960	Connected with Vasha beel		Re-excavation needed.
108	Chandiar dara	89.52825	24.63966			Re-excavation needed.
109	Icamoti river	89.54726	24.68830			Re-excavation needed.
110	Icamoti river	89.55146	24.69253			Re-excavation needed.
111	Icamoti river	89.55509	24.69335			Re-excavation needed.
112	Borobila khal	89.58667	24.71617	Get water from Chitulia beel and then moves towards Manos and then fall into Bangali		Re-excavation needed.
113	Borobila khal	89.58919	24.72106			Re-excavation needed.
114	Manos river	89.57593	24.73605			Re-excavation needed.
115	Manos river	89.57550	24.73730			Re-excavation needed.
116	Choto Chikashi	89.57541	24.73853	Connected with Manos river		Re-excavation needed.
117	Chikashi khal	89.56906	24.73718	Connected with Jamuna river and Sonaimukhi khal		Re-excavation needed.
118	Sultanata pond	89.56254	24.73898	Closed; man made		Re-excavation needed.
119	Chikashi beel	89.56375	24.74285	Connected with Jamuna river		Re-excavation needed.
120	Chunipara khal	89.60487	24.74225	Connectivity with Jamuna has been blocked by the BWDB embankment , connected with Manos during rainy season		Re-excavation needed.
121		89.60570	24.75468			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
122		89.60569	24.75825			Re-excavation needed.
123	Andhara beel	89.59713	24.76279	Get water from Jamuna river through Bari khal and meet with Bangali river after passing the Dander beel		Re-excavation needed.
124	Danger beel	89.59276	24.76321	Connected with Bangali	Pen culture	Re-excavation needed.
125		89.58337	24.78865		Pen culture	Re-excavation needed.
126	Burir beel	89.56433	24.79057	Connected with Bangali on 2 km south		Re-excavation needed.
127	Valukatola Mochra	89.55876	24.77841			Re-excavation needed.
128	Bilai chati beel	89.56951	24.75076	Connected with Jamuna		Re-excavation needed.
129	Harani beel	89.56729	24.75152	Connected with Jamuna		Re-excavation needed.
130	Bognali beel	89.56975	24.76222	Connected with Jamuna		Re-excavation needed.
131	Fish sanctuary on bangali river	89.53374	24.80312			Re-excavation needed.
132	Nayan beel	89.52835	24.76171	Get water when Bangali overflows		Re-excavation needed.
133	Ghoramara beel	89.52333	24.74808	Get water when Bangali overflows		Re-excavation needed.
134	Nander para khal	89.51768	24.75037			Re-excavation needed.
135	Nander para kola	89.51315	24.75345	Connected with Nander para beel		Re-excavation needed.
136	Uttar Kanto nagar beel	89.51281	24.74619	Connected with Nander para khal		Re-excavation needed.
137	Bangali branch	89.49290	24.75480			Re-excavation needed.
138	Bangali river	89.48886	24.75877			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
	branch					
139		89.48516	24.76425			Re-excavation needed.
140	Chokivati Daho	89.47973	24.78126	Get water from Bangali river		Re-excavation needed.
141	Kharo khal	89.47749	24.77528	Get water from Jamuna river		Re-excavation needed.
142	Chander beel	89.45283	24.79038	Get water from kharo khal		Re-excavation needed.
143	Karotoya river	89.40497	24.74013			Re-excavation needed.
144	Bagomara beel	89.42257	24.73449	Get water from takur beel		Re-excavation needed.
145	Durga danga beel	89.42328	24.73920	Rain water	Fish culture is practised	Re-excavation needed.
146	Sonaidanga beel	89.43215	24.74156	Get water from Bangali river through Kashpata khal	Community based fisheries management	Re-excavation needed.
147	Satbeela	89.43452	24.74504	Get water from Bangali river through Kashpata khal	Fish culture is practised	Re-excavation needed.
148	Beel pui	89.43835	24.74597	Get water from Bangali river through Kashpata khal and Satbeela		Re-excavation needed.
149	Kachugari beel	89.44924	24.74556	Get water from Bangali river through Cholmari khal		Re-excavation needed.
150	Kashpathar khal	89.45717	24.75674			Re-excavation needed.
151	Kashpathar beel	89.45085	24.75305	Get water from Bangali river through Kashpata khal and Karotoya river via Madla canal		Re-excavation needed.
152	Bagtumari beel	89.44770	24.75289			Re-excavation needed.
153	Vhabra beel	89.44488	24.75544	Get water from Bangali river through Kashpata khal		Re-excavation needed.
154	Karotoya river	89.44739	24.62760			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
155	Bangali	89.47812	24.61754			Re-excavation needed.
156	Bangali	89.46523	24.62604			Re-excavation needed.
157	Karotoya river meets with Bangali	89.47432	24.63037			Re-excavation needed.
158	Paddy field	89.46753	24.60966			Re-excavation needed.
159	Satra beel	89.46122	24.61151	Closed	Pen culture is practised	Re-excavation needed.
160	Sujabaz Daho	89.39687	24.80644	Connected with karotoya		Re-excavation needed.
161	Karotoya river	89.40605	24.80666			Re-excavation needed.
162	Dighar beel	89.44632	24.81971	Connected with Bangali		Re-excavation needed.
163	Pirir daho	89.45170	24.81626	Connected with Bangali		Re-excavation needed.
164	Dharma gacha Daho	89.45706	24.81232	Closed		Re-excavation needed.
165	Sonakanidoya daho	89.46321	24.81052	Get water from Branch of Bangali river/ Mohisaban khal		Re-excavation needed.
166	Branch of Bangali	89.46529	24.79370			Re-excavation needed.
167	Karotoya river	89.38919	24.82735			Re-excavation needed.
168	Angari beel	89.40704	24.84187	Get water from Karotoya		Re-excavation needed.
169	Karotoya	89.41679	24.84209			Re-excavation needed.
170	Karotoya	89.42217	24.84446			Re-excavation needed.
171	Karotoya	89.42276	24.84586			Re-excavation needed.
172	Dholir beel			Get water from Karotoya		Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
173	Dhondhonia beel	89.41430	24.86742	Get water from Karotoya and Bangali		Re-excavation needed.
174	Dhondhonia beel	89.41386	24.86840			Re-excavation needed.
175	Nolar beel	89.41061	24.86907	Get water from Karotoya		Re-excavation needed.
176	Kusar beel	89.42342	24.87745	Get water from Karotoya and Bangali via Dhondhonia beel		Re-excavation needed.
177	Upar danga beel	89.42840	24.86907	Get water from Karotoya and Bangali via Dhondhonia beel and Kusar beel		Re-excavation needed.
178	Nurail beel	89.39532	24.91359	Get water from Karotoya and Bangali		Re-excavation needed.
179	Nurail beel	89.39527	24.91603			Re-excavation needed.
180	Nurail beel	89.39503	24.91614			Re-excavation needed.
181	Marajan khal	89.41873	24.90452			Re-excavation needed.
182	Singar beel	89.42564	24.90241	Get water from Bangali River		Re-excavation needed.
183	Do beel	89.42564	24.90241	Get water from Bangali River	Merged with Singar beel	Re-excavation needed.
184	Hapania -Shaghat beel	89.44408	24.90150	Get water from Singer		Re-excavation needed.
185	Naruamala khal	89.45493	24.90198			Re-excavation needed.
186	Icamoti river	89.46289	24.90291			Re-excavation needed.
188	Gorar beel	0.5 km east-north from 1006				Re-excavation needed.
189	Nizkakza beel	89.48751	24.93151	Get water from Bangali River		Re-excavation needed.
191	Suk daho khal	89.51324	24.94915			Re-excavation needed.
192	Boira khal	89.53643	24.96608			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
193	Suk daho beel	0.5 km north from 1010		Get water from Bangali River		Re-excavation needed.
194	Mahicharan beel	89.46846	24.91093			Re-excavation needed.
195	Branch of Icamoti	89.48320	24.87175			Re-excavation needed.
196	Branch of Icamoti	89.49667	24.86076			Re-excavation needed.
197	Branch of Icamoti	89.50040	24.85955			Re-excavation needed.
198	Branch of Icamoti	89.50349	24.85308			Re-excavation needed.
199	Branch of Icamoti	89.50686	24.85143			Re-excavation needed.
200	Bejora beel	89.39543	24.81822			Re-excavation needed.
201	Khaura jan beel	89.45013	24.79272			Re-excavation needed.
202	Khaura jan beel	89.45725	24.78784			Re-excavation needed.
203	Machbari beel	89.46482	24.78668			Re-excavation needed.
204	Sonaikhali khal	89.49549	24.77695	Meet with Bangali at 1.5 km south-west		Re-excavation needed.
205	Bangali	89.49316	24.75472			Re-excavation needed.
206	Nimgachi beel	89.50155	24.75198			Re-excavation needed.
207	Nimgachi khal	89.51022	24.75119	Meet with Bangali at 0.25 km north-west		Re-excavation needed.
208	Nander para khal	89.51787	24.75032			Re-excavation needed.
209	Chara gari Matchra	89.53926	24.77685			Re-excavation needed.
210	khal	89.55307	24.79847			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
211	Kutubpur khal	89.58432	24.80751			Re-excavation needed.
212	Kutubpur khal	89.58185	24.80804			Re-excavation needed.
213	Branch of Bangali	89.56434	24.80184			Re-excavation needed.
214	Bangali river	89.56655	24.80478			Re-excavation needed.
215	Bangali and kutubpur meet point	89.56491	24.80923			Re-excavation needed.
216	Kazla beel	2 km north- east from 1042				Re-excavation needed.
217	Meet point of Kazla and kutubpur khal	89.56628	24.80983			Re-excavation needed.
218	Kholsha bari beel	89.57743	24.80746	Connected with Kutubpur khal during rainy season		Re-excavation needed.
219	Meet point of Manos river and kutubpur khal	89.58508	24.80691			Re-excavation needed.
220	Kutubpur - Manos beel	89.58766	24.81208	Merged with Manos river		Re-excavation needed.
221	Kutubpur - Manos beel	89.58769	24.81228	Merged with Manos river		Re-excavation needed.
222	Branch of Belai river	89.57469	24.86299			Re-excavation needed.
223	Bangali river	89.57147	24.86721			Re-excavation needed.
224	Molar beel	89.57145	24.87070	Closed		Re-excavation needed.
225	Deuli beel	89.57267	24.91768			Re-excavation needed.

	Name of the water body	Co-ordinate		Problem/Connectivity	Present situation of water flow	Mitigation / work needed
		Longitude	Latitude			
226	Vagir beel	89.55803	24.92871	Get water from Bangali and again meet with Bangali via Deuli beel and Taijur para khal		Re-excavation needed.
227	Taijur para khal	89.56252	24.92269			Re-excavation needed.
228	Taijur para khal	89.56242	24.91901			Re-excavation needed.
229	Meet point of Bangali and Taijur para khal	89.56255	24.91980			Re-excavation needed.
230	Bangali river	89.56763	24.89481			Re-excavation needed.
231	Manos river	89.58050	24.80426			Re-excavation needed.

Timing of fish migration:

15 March - Broodstock (berried fish) starts migration towards upstream

15 April to 30 May - Most of the matured broods complete either partial or full breeding i.e. eggs/spawn, so need connectivity with the adjacent floodplains to facilitate drifting downstream migration.

01 to 30 July - Most of the fingerlings enter into the floodplains. After that, only lately recruited spawn/eggs drifted down to the floodplain.

15 September to 30 October - Adults and young fishes migrate to the main river channel.

Criteria for fish migration:

A very little information on the swimming and migration pattern of the fish and shrimp species is available around. Considering all the limitation a detail study has carried out on the species life cycle and habitat, their migration pattern, responses to the water velocity, spawning season, seasonal occurrence and abundance, tidal condition, water depth, hydrological parameters, etc by IUCN in 2005 (Chowdhury, M.S.M., 2005).

Fish migration is most commonly brought about by a behavioral response to currents. However, the nature of this response can change during the life cycle of the species. The most fundamental change is between active upstream migration, usually undertaken by adults moving to their spawning grounds, and the passive or combined active/passive downstream migrations of juveniles. River discharge provides the essential directional cues to physiologically prepared fishes to move upstream, whilst also offering increased resistance to progress. Some fish tend to follow their migratory pathways against the resistance of the current in one of two ways. Pelagic and some near bottom dwelling species move near the surface of the water, Illumination and not the time of day is the principal criterion for movement, hence the fullness of the moon is important in determining the timing of migrations. Species which rely upon mainly tactile orientation, for many of the catfishes, move against the current close to the bottom or near the banks at night. The moon or other sources of light can inhibit migratory movement of these species.

The early floods are not only important for transporting carp hatchlings, but they also carry a large number of other species. The development and drift of other species, such as ***Chanda spp.***, and ***Glossogobius spp.*** and species of prawn correspond to later peaks in river discharge in August and September. Early water flow in March-April from the upper regime also influences the downstream migration of the prawn brood.

Fish normally migrate at an intermediate cruising speed and only rarely at maximum speed. If water velocity in the main river channel exceeds their swimming ability, the fish will move closer to the bank where velocities are generally slower. The presence of turbulence or whirlpools tends to disorientate the fish. The swimming speeds of bottom fish tend to be rather lower than those of pelagic species, of the order of 0.5-1.0 times the body length sec⁻¹ compared to 3-4 times the body length sec⁻¹ for pelagic species. Nevertheless, the rate of progress upstream is often similar, since the bottom fish are moving in slower currents.

Water velocity is the main initial stimulus to upstream migration, and there are two indices which define the ability of the current to stimulate movement and the ability of the fish to respond. These are ***Threshold water Velocity (V_{thr})*** ***the minimum water***

velocity which lead to an orientation reaction against the current (value remain between 1-30cm sec⁻¹) and Critical Velocity (V_{cr}) at which minimum water velocity fish begin to be carried away by the water flow. The V_{thr} and V_{cr} vary with size of fish and also according to the species or category of fish. Typically, bottom dwellers have critical velocities 2-3 times lower than those for species living in mid or upper level of the water column. For these species there is a tendency for threshold velocities to be high and critical velocities to be low. The reverse is true for pelagic species.

Fish are also generally attracted to faster currents: attracting velocities are frequently 0.6-0.8 m sec⁻¹ of the V_{cr}. For a wide selection it could be 0.7-0.9 m sec⁻¹ (Malevanchik and Nikonorov, 1984)i.e. 1.0 meter/sec. But maximum water velocity need to the orientation of the fish movement is generally remains within 0.3 meter sec⁻¹ (approximately). **Critical velocity (V_{cr}) of current should be in between 0.6-0.8 meter sec⁻¹ (approximately).** Minimum water depth will be required 0.8-1.0 meter in both side of the structure. Head difference should be maintained as 1-1.2 meter.

One final factor which is known to affect the performance and response of migratory fishes to water velocity is temperature. Maximum swimming speed affects both by temperature and length of the fish. The higher the temperature and length of the fish species the higher of current velocity and faster the swimming speed of the fish. **The hydrostatic pressure caused by head difference across water control structures may sometimes be sufficient to kill hatchlings and berried fish female.**

Effectivity of the fish migration through fish pass:

Effectivity of the fish pass structure depends on the timing for hatchlings migration and fish mortality rate. The figures given in the following table showed effectivity (%) of the proposed fish passes at different invert level (LWL of the Jamuna river at Jamuna Bridge):

Period	L.W.L of Jamuna at EGB Year (2000-09) (mPWD)	Flood Plain Level (mPWD)	Proposed Invert level (mPWD)	Depth of Canal from Flood Plain (m)	Percentage of Effectivity	Age of fish
Col 1	Col 2	Col 3	Col 4 (Col 2-1.0 to 1.2 m)	Col 5 (Col 3-Col 4)	Col 6	Col 7
01 Apr	5.90	11.00	4.90	6.10	0%	-
15 Apr	6.60	11.00	5.60	5.40	100%	Eggs/spawn
01 May	7.50	11.00	6.50	4.50	90%	Eggs/spawn
15 May	7.80	11.00	6.80	4.20	75%	Eggs/spawn
01 Jun	8.40	11.00	7.40	3.60	50%	Eggs/spawn
15 Jun	8.85	11.00	7.85	3.15	25%	Eggs/spawn
30 Jun	9.40	11.00	8.40	2.60	10%	Eggs/spawn
15 Sep	10.40	11.00	9.40	1.60	100%	Young/Adult
30 Sep	10.60	11.00	9.60	1.40	100%	Young/Adult
15 Oct	9.50	11.00	8.50	2.50	90%	Young/Adult

* Minimum water depth required in canal/khal 1-1.2 m with velocity <1m/sec.

Annex G. Emission Factors

Citation in main text (Volume I): **Section 9.4.3.2.**

Equipment to be used during construction and their emission factors

Equipment	Emission Factors (lb/hr)							
	ROG	CO	NO _x	SO _x	PM	CO ₂	CH ₄	N ₂ O
Concrete Mixer								
Concrete Static Mixer 0.25 M3	0.0075	0.0386	0.0475	0.0001	0.0023	6.3	0.0007	0.0003048
Concrete Vibrator	0.0075	0.0386	0.0475	0.0001	0.0023	6	0.0007	0.0003048
Concrete Batching Plant (Computerized)								
Batch/Mix RCC Plant 500 m3/hr	0.1525	0.5829	0.9172	0.0010	0.0851	83.1	0.0138	0.0061903
Asphalt Plant								
Capacity 20 Ton	0.1927	0.5215	0.4545	0.0006	0.0462	44.0	0.0174	0.0078241
Bull-Dozer								
Komatsu D-85	0.2545	0.7124	2.1985	0.0021	0.0942	183	0.0230	0.0103347
Bull-Dozer 90 HP	0.2209	0.8528	1.6304	0.0015	0.0945	129	0.0199	0.0089691
Bull-Dozer 120 HP	0.2209	0.8528	1.6304	0.0015	0.0945	129.5	0.0199	0.0089691
Bull-Dozer 200 HP	0.2545	0.7124	2.1985	0.0021	0.0942	183	0.0230	0.0103347
Front End Loader								
Front End Loader 1.5 M3	0.1045	0.4187	0.6404	0.0007	0.0576	58.9	0.0094	0.0042419
Front End Loader 2.5 M3	0.1312	0.6288	1.0135	0.0012	0.0583	106	0.0118	0.0053287
Front End Loader 3.00 M3	0.1330	0.3838	1.3129	0.0017	0.0462	149	0.0120	0.0054
Grader								
Road Roller								
Tandem Roller (10 Ton to 12 Ton)	0.0392	0.3801	0.2647	0.0007	0.0137	59.0	0.0035	0.0015925
Tandem Vibratory Roller 1.5 Ton	0.0392	0.3801	0.2647	0.0007	0.0137	59.0	0.0035	0.0015925
Dumpers/Trucks								
Truck Mercedes 10W (500 ft³ (14.16 M³) Capacity)	0.1533	0.7593	1.1072	0.0014	0.0666	125	0.0138	0.0062243
Dumper 10 Ton Capacity	0.1533	0.7593	1.1072	0.0014	0.0666	125	0.0138	0.0062243
Excavator (Chain Excavator)								
Hitachi 220	0.1183	0.5220	0.7300	0.0009	0.0657	73.6	0.0107	0.0048023
Hitachi 200	0.1183	0.5220	0.7300	0.0009	0.0657	73.6	0.0107	0.0048023
Power Generators								
150 KVA	0.0157	0.0698	0.1063	0.0002	0.0061	10.2	0.0014	0.0006363
250 KVA	0.0276	0.0951	0.1632	0.0002	0.0096	17.6	0.0025	0.0011217
Diesel Delivery Truck								
Diesel Delivery Truck with 100 mm (4 ") diameter Pump, 6000 Liters	0.034	0.3304	0.0336	0.0004	0.0036	44.094	0.0032	0.002
Diesel Delivery Truck with 100 mm (4 ") Diameter Pump, 10,000 Liters (Capacity)	0.034	0.3304	0.0336	0.0004	0.0036	44.094	0.0032	0.002
Bitumen Distributor Truck								
Capacity 2000 Ton	0.034	0.3304	0.0336	0.0004	0.0036	44.094	0.0032	0.002
Dewatering Pump								
Dewatering Pump with Delivery Pipe 4" Ø (Diesel)	0.0386	0.1051	0.1803	0.0002	0.0117	19.5	0.0035	0.0015671

Equipment	Emission Factors (lb/hr)							
	ROG	CO	NO _x	SO _x	PM	CO ₂	CH ₄	N ₂ O
Asphalt Recycling & Cold Milling Machine								
Asphalt Recycling Machine	0.0185	0.0632	0.1170	0.0002	0.0045	15.3	0.0017	0.0007518

Source: US South Coast Air Quality Management District - OFFROAD Model Mobile Source Emission Factors (<http://www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook/off-road-mobile-source-emission-factors>).

Annex H. Environmental Codes of Practice

Citation in main text (Volume I): **Section 9.4.3.2.**

ECOP 1: Waste Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
General Waste	Soil and water pollution from the improper management of wastes and excess materials from the construction sites.	The Contractor shall • Develop waste management plan for various specific waste streams (e.g., reusable waste, flammable waste, construction debris, food waste etc.) prior to commencing of construction and submit to CSC for approval. • Organize disposal of all wastes generated during construction in an environmentally acceptable manner. This will include consideration of the nature and location of disposal site, so as to cause less environmental impact. • Minimize the production of waste materials by 3R (Reduce, Recycle and Reuse) approach. • Segregate and reuse or recycle all the wastes, wherever practical. • Prohibit burning of solid waste • Collect and transport non-hazardous wastes to all the approved disposal sites. Vehicles transporting solid waste shall be covered with tarps or nets to prevent spilling waste along the route • Train and instruct all personnel in waste management practices and procedures as a component of the environmental induction process. • Provide refuse containers at each worksite. • Request suppliers to minimize packaging where practicable. • Place a high emphasis on good housekeeping practices. • Maintain all construction sites in a cleaner, tidy and safe condition and provide and maintain appropriate facilities as temporary storage of all wastes before transportation and final disposal.
Hazardous Waste	Health hazards and environmental impacts due to improper waste	The Contractor shall • Collect chemical wastes in 200 liter drums (or similar sealed container), appropriately labeled

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
	management practices	for safe transport to an approved chemical waste depot. • Store, transport and handle all chemicals avoiding potential environmental pollution. • Store all hazardous wastes appropriately in bunded areas away from water courses. • Make available Material Safety Data Sheets (MSDS) for hazardous materials on-site during construction. • Collect hydrocarbon wastes, including lube oils, for safe transport off-site for reuse, recycling, treatment or disposal at approved locations. • Construct concrete or other impermeable flooring to prevent seepage in case of spills

ECOP 2: Fuels and Hazardous Goods Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Fuels and hazardous goods.	Materials used in construction have a potential to be a source of contamination. Improper storage and handling of fuels, lubricants, chemicals and hazardous goods/materials on-site, and potential spills from these goods may harm the environment or health of construction workers.	The Contractor shall • Prepare spill control procedures and submit the plan for CSC approval. • Train the relevant construction personnel in handling of fuels and spill control procedures. • Store dangerous goods in bunded areas on a top of a sealed plastic sheet away from watercourses. • Refueling shall occur only within bunded areas. • Make available MSDS for chemicals and dangerous goods on-site. • Transport waste of dangerous goods, which cannot be recycled, to a designated disposal site approved by DoE. • Provide absorbent and containment material (e.g., absorbent matting) where hazardous material are used and stored and personnel trained in the correct use. • Provide protective clothing, safety boots, helmets, masks, gloves, goggles, to the construction personnel, appropriate to materials

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		in use. • Make sure all containers, drums, and tanks that are used for storage are in good condition and are labeled with expiry date. Any container, drum, or tank that is dented, cracked, or rusted might eventually leak. Check for leakage regularly to identify potential problems before they occur. • Store hazardous materials above flood plain level. • Put containers and drums in temporary storages in clearly marked areas, where they will not be run over by vehicles or heavy machinery. The area shall preferably slope or drain to a safe collection area in the event of a spill. • Put containers and drums in permanent storage areas on an impermeable floor that slopes to a safe collection area in the event of a spill or leak. • Take all precautionary measures when handling and storing fuels and lubricants, avoiding environmental pollution. • Avoid the use of material with greater potential for contamination by substituting them with more environmentally friendly materials. • Return the gas cylinders to the supplier. However, if they are not empty prior to their return, they must be labeled with the name of the material they contained or contain, information on the supplier, cylinder serial number, pressure, their last hydrostatic test date, and any additional identification marking that may be considered necessary.

ECoP 3: Water Resources Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Hazardous Material and Waste	Water pollution from the storage, handling and disposal of hazardous materials and general construction	The Contractor shall • Follow the management guidelines proposed in ECPs 1 and 2. • Minimize the generation of sediment, oil and

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
	waste, and accidental spillage	grease, excess nutrients, organic matter, litter, debris and any form of waste (particularly petroleum and chemical wastes). These substances must not enter waterways, storm water systems or underground water tables
Discharge from construction sites	During construction both surface and groundwater quality may be deteriorated due to construction activities in the river, sewerages from construction sites and work camps. The construction works will modify groundcover and topography changing the surface water drainage patterns of the area including infiltration and storage of storm water. These changes in hydrological regime lead to increased rate of runoff, increase in sediment and contaminant loading, increased flooding, groundwater contamination, and effect habitat of fish and other aquatic biology.	The Contractor shall • Install temporary drainage works (channels and bunds) in areas required for sediment and erosion control and around storage areas for construction materials • Install temporary sediment basins, where appropriate, to capture sediment-laden run-off from site • Divert runoff from undisturbed areas around the construction site • Stockpile materials away from drainage lines • Prevent all solid and liquid wastes entering waterways by collecting solid waste, oils, chemicals, bitumen spray waste and wastewaters from brick, concrete and asphalt cutting where possible and transport to an approved waste disposal site or recycling depot • Wash out ready-mix concrete agitators and concrete handling equipment at washing facilities off site or into approved bunded areas on site. Ensure that tires of construction vehicles are cleaned in the washing bay (constructed at the entrance of the construction site) to remove the mud from the wheels. This shall be done in every exit of each construction vehicle to ensure the local roads are kept clean.
Soil Erosion and siltation	Soil erosion and dust from the material stockpiles will increase the sediment and contaminant loading of surface water bodies.	The Contractor shall • Stabilize the cleared areas not used for construction activities with vegetation or appropriate surface water treatments as soon as practicable following earthwork to minimize erosion • Ensure that roads used by construction vehicles are swept regularly to remove sediment. • Water the material stockpiles, access roads and bare soils on an as required basis to minimize dust. Increase the watering frequency during periods of high risk (e.g. high winds)

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction activities in water bodies	Construction works in the water bodies will increase sediment and contaminant loading, and effect habitat of fish and other aquatic biology.	The Contractor Shall • Dewater sites by pumping water to a sediment basin prior to release off site – do not pump directly off site • Monitor the water quality in the runoff from the site or areas affected by dredge plumes, and improve work practices as necessary • Protect water bodies from sediment loads by silt screen or bubble curtains or other barriers • Minimize the generation of sediment, oil and grease, excess nutrients, organic matter, litter, debris and any form of waste (particularly petroleum and chemical wastes). These substances must not enter waterways, storm water systems or underground water tables. • Use environment friendly and nontoxic slurry during construction of piles to discharge into the river. • Reduce infiltration of contaminated drainage through storm water management design • Do not discharge cement and water curing used for cement concrete directly into water courses and drainage inlets.
Drinking water	Groundwater at shallow depths is contaminated with arsenic and hence not suitable for drinking purposes.	The Contractor Shall • Pumping of groundwater shall be from deep aquifers of more than 300 m to supply arsenic free water. Safe and sustainable discharges are to be ascertained prior to selection of pumps. • Tube wells will be installed with due regard for the surface environment, protection of groundwater from surface contaminants, and protection of aquifer cross contamination • All tube wells, test holes, monitoring wells that are no longer in use or needed shall be properly decommissioned
	Depletion and pollution of groundwater resources	• Install monitoring wells both upstream and downstream areas near construction yards and construction camps to regularly monitor the water quality and water levels. • Protect groundwater supplies of adjacent lands

ECOP 4: Drainage Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Excavation and earth works, and construction yards	Lack of proper drainage for rainwater/liquid waste or wastewater owing to the construction activities harms environment in terms of water and soil contamination, and mosquito growth.	The Contractor shall • Prepare a program for prevent/avoid standing waters, which CSC will verify in advance and confirm during implementation • Provide alternative drainage for rainwater if the construction works/earth-fillings cut the established drainage line • Establish local drainage line with appropriate silt collector and silt screen for rainwater or wastewater connecting to the existing established drainage lines already there • Rehabilitate road drainage structures immediately if damaged by contractors' road transports. • Build new drainage lines as appropriate and required for wastewater from construction yards connecting to the available nearby recipient water bodies. Ensure wastewater quality conforms to the relevant standards provided by DoE, before it being discharged into the recipient water bodies. • Ensure the internal roads/hard surfaces in the construction yards/construction camps that generate has storm water drainage to accommodate high runoff during downpour and that there is no stagnant water in the area at the end of the downpour. • Construct wide drains instead of deep drains to avoid sand deposition in the drains that require frequent cleaning. • Provide appropriate silt collector and silt screen at the inlet and manholes and periodically clean the drainage system to avoid drainage congestion • Protect natural slopes of drainage channels to ensure adequate storm water drains. • Regularly inspect and maintain all drainage channels to assess and alleviate any drainage congestion problem. • Reduce infiltration of contaminated drainage through storm water management design
Ponding of water	Health hazards due to mosquito breeding	• Do not allow ponding of water especially near the waste storage areas and construction camps

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		• Discard all the storage containers that are capable of storing of water, after use or store them in inverted position

ECoP 5: Soil Quality Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Filling of Sites with dredge spoils	Soil contamination will occur from drainage of dredged spoils	The Contractor shall • Ensure that dredged sand used for land filling shall be free of pollutants. Prior to filling, sand quality shall be tested to confirm whether soil is pollution free. Sediments shall be properly compacted. Top layer shall be the 0.5 m thick clay on the surface and boundary slopes along with grass. Side Slope of Filled Land of 1:2 shall be constructed by suitable soils with proper compaction as per design. Slope surface shall be covered by top soils/ cladding materials (0.5m thick) and grass turfing with suitable grass. • Leaching from the sediments shall be contained to seep into the subsoil or shall be discharged into settling lagoons before final disposal. • No sediment laden water in the adjacent lands near the construction sites, and/or wastewater of suspended materials excessive of 200mg/l from dredge spoil storage/use area in the adjacent agricultural lands.
Storage of hazardous and toxic chemicals	Spillage of hazardous and toxic chemicals will contaminate the soils	The Contractor shall • Strictly manage the wastes management plans proposed in ECP1 and storage of materials in ECP2 • Construct appropriate spill contaminant facilities for all fuel storage areas • Establish and maintain a hazardous materials register detailing the location and quantities of hazardous substances including the storage, use of disposals • Train personnel and implement safe work practices for minimizing the risk of spillage • Identify the cause of contamination, if it is reported, and contain the area of contamination.

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		The impact may be contained by isolating the source or implementing controls around the affected site • Remediate the contaminated land using the most appropriate available method to achieve required commercial/industrial guideline validation results
Construction material stock piles	Erosion from construction material stockpiles may contaminate the soils	The Contractor shall • Protect the toe of all stockpiles, where erosion is likely to occur, with silt fences, straw bales or bunds

ECOP 6: Erosion and Sediment Control

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Clearing of construction sites	Cleared areas and slopes are susceptible for erosion of top soils, that affects the growth of vegetation which causes ecological imbalance.	• Reinstate and protect cleared areas as soon as possible. • Mulch to protect batter slopes before planting • Cover unused area of disturbed or exposed surfaces immediately with mulch/grass turfs/tree plantations
Construction activities and material stockpiles	The impact of soil erosion are (i) Increased run off and sedimentation causing a greater flood hazard to the downstream, (ii) destruction of aquatic environment in nearby lakes, streams, and reservoirs caused by erosion and/or deposition of sediment damaging the spawning grounds of fish, and (iii) destruction of vegetation by burying or gullyng.	The Contractor shall • Locate stockpiles away from drainage lines • Protect the toe of all stockpiles, where erosion is likely to occur, with silt fences, straw bales or bunds • Remove debris from drainage paths and sediment control structures • Cover the loose sediments and water them if required • Divert natural runoff around construction areas prior to any site disturbance • Install protective measures on site prior to construction, for example, sediment traps • Control drainage through a site in protected channels or slope drains • Install 'cut off drains' on large cut/fill batter slopes to control water runoff speed and hence erosion

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		• Observe the performance of drainage structures and erosion controls during rain and modify as required.

ECOP 7: Top Soil Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Land clearing and earth works	Earthworks will impact the fertile top soils that are enriched with nutrients required for plant growth or agricultural development.	The Contractor shall • Strip the top soil to a depth of 15 cm and store in stock piles of height not exceeding 2m. • Remove unwanted materials from top soil like grass, roots of trees and similar others. • The stockpiles will be done in slopes of 2:1 to reduce surface runoff and enhance percolation through the mass of stored soil. • Locate topsoil stockpiles in areas outside drainage lines and protect from erosion. • Construct diversion channels and silt fences around the topsoil stockpiles to prevent erosion and loss of topsoil. • Spread the topsoil to maintain the physico-chemical and biological activity of the soil. The stored top soil will be utilized for covering all disturbed area and along the proposed plantation sites • Prior to the re-spreading of topsoil, the ground surface will be ripped to assist the bunding of the soil layers, water penetration and revegetation
Transport	Vehicular movement outside ROW or temporary access roads will affect the soil fertility of the agricultural lands	• Limit equipment and vehicular movements to within the approved construction zone • Construct temporary access tracks to cross concentrated water flow lines at right angles • Plan construction access to make use, if possible, of the final road alignment • Use vehicle-cleaning devices, for example, ramps or wash down areas

ECoP 8: Topography and Landscaping

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Land clearing and earth works	Flood plains of the existing Project area will be affected by the construction of various project activities. Construction activities especially earthworks will change topography and disturb the natural rainwater/flood water drainage as well as will change the local landscape.	The Contractor shall • Ensure the topography of the final surface of all raised lands (construction yards, approach roads, access roads, bridge end facilities, etc.) are conducive to enhance natural draining of rainwater/flood water; • Keep the final or finished surface of all the raised lands free from any kind of depression that insists water logging • Undertake mitigation measures for erosion control/prevention by grass-turfing and tree plantation, where there is a possibility of rain-cut that will change the shape of topography. • Cover immediately the uncovered open surface that has no use of construction activities with grass-cover and tree plantation to prevent soil erosion and bring improved landscaping

ECoP 9: Sand Extraction

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Sand extraction	Sand extraction can potentially impact the aquatic habitat, water quality, and key aquatic species and their food availability.	The Contractor shall: • not extract sand from the river bed in long continuous stretches; alternate patches of river bed will be left undisturbed to minimize the potentially negative impacts on the aquatic habitat. • not collect large quantities of sand from any single location • not excavate deeper than 3 m at any single location. • not carry out sand extraction near chars that have sensitive habitats • not carry out sand extraction during the night particularly near the chars • obtain approval from CSC before starting sand extraction from any location. • carry out sand extraction from sand bars to the

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		extent possible. • maintain record of all sand extraction (quantities, location shown on map, timing, any sighting of key species) • provide silt fences, sediment barriers or other devices around the extraction areas to prevent migration of sediment rich water in to the river channels. • refuel of barges and boats with a proper care to avoid any spills. • make available spill kits and other absorbent material at refueling points on the barges. • properly collect, treat and dispose the bilge water from of barges, and boats. • regularly service all waterborne plant as per the manufacturer's guidelines and be inspected daily prior to operation. CSC will: • carry out survey of the area prior to sand extraction • identify any sensitive receptors/habitats (eg, turtle nesting area, birds colony) at or near the proposed sand extraction locations. • determine 'no-go' areas for sand extraction, based upon the above survey, • monitor the activity to ensure that the contractor complies with the conditions described earlier. • survey the area after sand extraction to identify any left over impacts.

ECOP 10: Air Quality Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction vehicular traffic	Air quality can be adversely affected by vehicle exhaust emissions and combustion of fuels.	The Contractor shall • Fit vehicles with appropriate exhaust systems and emission control devices. Maintain these devices in good working condition. • Operate the vehicles in a fuel efficient manner • Cover haul vehicles carrying dusty materials moving outside the construction site

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		• Impose speed limits on all vehicle movement at the worksite to reduce dust emissions • Control the movement of construction traffic • Water construction materials prior to loading and transport • Service all vehicles regularly to minimize emissions • Limit the idling time of vehicles not more than 2 minutes
Construction machinery	Air quality can be adversely affected by emissions from machinery and combustion of fuels.	The Contractor shall • Fit machinery with appropriate exhaust systems and emission control devices. Maintain these devices in good working condition in accordance with the specifications defined by their manufacturers to maximize combustion efficiency and minimize the contaminant emissions. Proof or maintenance register shall be required by the equipment suppliers and contractors/subcontractors • Focus special attention on containing the emissions from generators • Machinery causing excess pollution (e.g. visible smoke) will be banned from construction sites • Service all equipment regularly to minimize emissions • Provide filtering systems, duct collectors or humidification or other techniques (as applicable) to the concrete batching and mixing plant to control the particle emissions in all its stages, including unloading, collection, aggregate handling, cement dumping, circulation of trucks and machinery inside the installations
Construction activities	Dust generation from construction sites, material stockpiles and access roads is a nuisance in the environment and can be a health hazard.	• Water the material stockpiles, access roads and bare soils on an as required basis to minimize the potential for environmental nuisance due to dust. Increase the watering frequency during periods of high risk (e.g. high winds). Stored materials such as gravel and sand shall be covered and confined to avoid their being wind-drifted • Minimize the extent and period of exposure of

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		the bare surfaces • Reschedule earthwork activities or vegetation clearing activities, where practical, if necessary to avoid during periods of high wind and if visible dust is blowing off-site • Restore disturbed areas as soon as practicable by vegetation/grass-turfing • Store the cement in silos and minimize the emissions from silos by equipping them with filters. • Establish adequate locations for storage, mixing and loading of construction materials, in a way that dust dispersion is prevented because of such operations • Crushing of rocky and aggregate materials shall be wet-crushed, or performed with particle emission control systems

ECOP 11: Noise and Vibration Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction vehicular traffic	Noise quality will be deteriorated due to vehicular traffic	The Contractor shall • Maintain all vehicles in order to keep it in good working order in accordance with manufactures maintenance procedures • Make sure all drivers will comply with the traffic codes concerning maximum speed limit, driving hours, etc. • Organize the loading and unloading of trucks, and handling operations for the purpose of minimizing construction noise on the work site
Construction machinery	Noise and vibration may have an impact on people, property, fauna, livestock and the natural environment.	The Contractor shall • Appropriately site all noise generating activities to avoid noise pollution to local residents • Use the quietest available plant and equipment • Modify equipment to reduce noise (for example, noise control kits, lining of truck trays or pipelines) • Maintain all equipment in order to keep it in

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		good working order in accordance with manufactures maintenance procedures. Equipment suppliers and contractors shall present proof of maintenance register of their equipment. • Install acoustic enclosures around generators to reduce noise levels. • Fit high efficiency mufflers to appropriate construction equipment • Avoid the unnecessary use of alarms, horns and sirens
Construction activity	Noise and vibration may have an impact on people, property, fauna, livestock and the natural environment.	The Contractor shall • Notify adjacent landholders prior any typical noise events outside of daylight hours • Educate the operators of construction equipment on potential noise problems and the techniques to minimize noise emissions • Employ best available work practices on-site to minimize occupational noise levels • Install temporary noise control barriers where appropriate • Notify affected people if major noisy activities will be undertaken, e.g. pile driving • Plan activities on site and deliveries to and from site to minimize impact • Monitor and analyze noise and vibration results and adjust construction practices as required. • Avoid undertaking the noisiest activities, where possible, when working at night near the residential areas

ECOP 12: Protection of Flora

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Vegetation clearance	Local flora are important to provide shelters for the birds, offer fruits and/or timber/fire wood, protect soil erosion and overall keep the environment very	The Contractor shall • Reduce disturbance to surrounding vegetation • Use appropriate type and minimum size of machine to avoid disturbance to adjacent vegetations. • Get approval from supervision consultant for clearance of vegetation.

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
	friendly to human-living. As such damage to flora has wide range of adverse environmental impacts.	• Make selective and careful pruning of trees where possible to reduce need of tree removal. • Control noxious weeds by disposing of at designated dump site or burn on site. • Clear only the vegetation that needs to be cleared in accordance with the plans. These measures are applicable to both the construction areas as well as to any associated activities such as sites for stockpiles, disposal of fill and construction of diversion roads, etc. • Do not burn off cleared vegetation – where feasible, chip or mulch and reuse it for the rehabilitation of affected areas, temporary access tracks or landscaping. Mulch provides a seed source, can limit embankment erosion, retains soil moisture and nutrients, and encourages re-growth and protection from weeds. • Return topsoil and mulched vegetation (in areas of native vegetation) to approximately the same area of the roadside it came from. • Avoid work within the drip-line of trees to prevent damage to the tree roots and compacting the soil. • Minimize the length of time the ground is exposed or excavation left open by clearing and re-vegetate the area at the earliest practically possible. • Ensure excavation works occur progressively and re-vegetation done at the earliest • Provide adequate knowledge to the workers regarding nature protection and the need of avoid felling trees during construction • Supply appropriate fuel in the work caps to prevent fuel wood collection

ECOP 13: Protection of Fauna

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction activities	The location of construction activities	The Contractor shall • Limit the construction works within the

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
	can result in the loss of wild life habitat and habitat quality,.	designated sites allocated to the contractors • check the site for animals trapped in, or in danger from site works and use a qualified person to relocate the animal
	Impact on migratory birds, its habitat and its active nests	The Contractor shall • Not be permitted to destruct active nests or eggs of migratory birds • Minimize the tree removal during the bird breeding season. If works must be continued during the bird breeding season, a nest survey will be conducted by a qualified biologist prior to commence of works to identify and located active nests • Minimize the release of oil, oil wastes or any other substances harmful to migratory birds to any waters or any areas frequented by migratory birds.
Vegetation clearance	Clearance of vegetation may impact shelter, feeding and/or breeding and/or physical destruction and severing of habitat areas	The Contractor shall • Restrict the tree removal to the minimum required. • Retain tree hollows on site, or relocate hollows, where appropriate • Leave dead trees where possible as habitat for fauna • Fell the hollow bearing trees in a manner which reduces the potential for fauna mortality. Felled trees will be inspected after felling for fauna and if identified and readily accessible will be removed and relocated or rendered assistance if injured. After felling, hollow bearing trees will remain unmoved overnight to allow animals to move of their own volition.
Construction camps	Illegal poaching	• Provide adequate knowledge to the workers regarding protection of flora and fauna, and relevant government regulations and punishments for illegal poaching.

ECOP 14: Protection of Fisheries

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction activities in River	The main potential impacts to fisheries are hydrocarbon spills and leaks from riverine transport and disposal of wastes into the river	The Contractor shall • Ensure the riverine transports, vessels and ships are well maintained and do not have oil leakage to contaminate river water. • Contain oil immediately on river in case of accidental spillage from vessels and ships and in this regard, make an emergency oil spill containment plan to be supported with enough equipments, materials and human resources • Do not dump wastes, be it hazardous or non-hazardous into the nearby water bodies or in the river
Construction activities on the land	The main potential impacts to aquatic flora and fauna River are increased suspended solids from earthworks erosion, sanitary discharge from work camps, and hydrocarbon spills	The Contractor shall • follow mitigation measures proposed in ECoP 3 : Water Resources Management and EC4: Drainage Management
	Filling of ponds for site preparation will impact the fishes.	The Contractor shall • Inspect any area of a water body containing fish that is temporarily isolated for the presence of fish, and all fish shall be captured and released unharmed in adjacent fish habitat • Install and maintain fish screens etc. on any water intake with drawing water from any water body that contain fish

ECoP 15: Road Transport and Road Traffic Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction vehicular traffic	Increased traffic use of road by construction vehicles will affect the movement of normal road traffics and the safety of the road-users.	The Contractor shall • Prepare and submit a traffic management plan to the CSC for his approval at least 30 days before commencing work on any project component involved in traffic diversion and management. • Include in the traffic management plan to ensure uninterrupted traffic movement during construction: detailed drawings of traffic arrangements showing all detours, temporary

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		road, temporary bridges temporary diversions, necessary barricades, warning signs / lights, and road signs. • Provide signs at strategic locations of the roads complying with the schedules of signs contained in the Bangladesh Traffic Regulations. • Install and maintain a display board at each important road intersection on the roads to be used during construction, which shall clearly show the following information in Bangla: • Location: chainage and village name • Duration of construction period • Period of proposed detour / alternative route • Suggested detour route map • Name and contact address/telephone number of the concerned personnel • Name and contact address / telephone number of the Contractor • Inconvenience is sincerely regretted.
	Accidents and spillage of fuels and chemicals	• Restrict truck deliveries, where practicable, to day time working hours. • Restrict the transport of oversize loads. • Operate road traffics/transport vehicles, if possible, to non-peak periods to minimize traffic disruptions. • Enforce on-site speed limit

ECOP 16: River Transport management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction activities in River	The presence of construction and dredging barges, pipe lines and other construction activities in the river can cause hindrance and risks to the river traffic.	The Contractor shall • Not obstruct other normal riverine transport while doing riverine transport and works • Identify the channel to be followed clearly using navigation aids such as buoys, beacons, and lighting • Provide proper buoyage, navigation lights and markings for bridge and dredging works to guide the other normal riverine transport

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		• Keep regular and close contacts with Bangladesh Inland Water Transport Authority (BIWTA) regarding their needs during construction of the project • Plan the river transport and transportation of large loads in coordination with BIWTA to avoid traffic congestions. • Provide signage for river traffic conforming to the BIWTA requirements • Position the dredge and pipeline in such a way that no disruption to the channel traffic will occur
	Accidents	The Contractor shall • Prepare an emergency plan for dealing with accidents causing accidental sinking of the vessels and ships • Ensure sufficient equipment and staffs available to execute the emergency plans • Provide appropriate lighting to barges and construction vessels.

ECOP 17: Construction Camp Management

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Siting and Location of construction camps	Campsites for construction workers are the important locations that have significant impacts such as health and safety hazards on local resources and infrastructure of nearby communities.	The Contractor shall • Locate the construction camps at areas which are acceptable from environmental, cultural or social point of view. • Consider the location of construction camps away from communities in order to avoid social conflict in using the natural resources such as water or to avoid the possible adverse impacts of the construction camps on the surrounding communities. • Submit to the CSC for approval a detailed layout plan for the development of the construction camp showing the relative locations of all temporary buildings and facilities that are to be constructed together with the location of site roads, fuel storage areas (for use in power supply generators), solid waste management and dumping locations, and drainage facilities, prior to the

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		development of the construction camps. Local authorities responsible for health, religious and security shall be duly informed on the set up of camp facilities so as to maintain effective surveillance over public health, social and security matters
Construction Camp Facilities	Lack of proper infrastructure facilities , such as housing, water supply and sanitation facilities will increase pressure on the local services and generate substandard living standards and health hazards.	Contractor shall provide the following facilities in the campsites - Adequate housing for all workers - Safe and reliable water supply. Water supply from deep tube wells of 300 m depth that meets the national standards - Hygienic sanitary facilities and sewerage system. The toilets and domestic waste water will be collected through a common sewerage. Provide separate latrines and bathing places for males and females with total isolation by wall or by location. The minimum number of toilet facilities required is one toilet for every ten persons. - Treatment facilities for sewerage of toilet and domestic wastes - Storm water drainage facilities. Both sides of roads are to be provided with shallow v drains to drain off storm water to a silt retention pond which shall be sized to provide a minimum of 20 minutes retention of storm water flow from the whole site. Channel all discharge from the silt retention pond to natural drainage via a grassed swale at least 20 meters in length with suitable longitudinal gradient. - Paved internal roads. Ensure with grass/vegetation coverage to be made of the use of top soil that there is no dust generation from the loose/exposed sandy surface. Pave the internal roads of at least haring-bond bricks to suppress dusts and to work against possible muddy surface during monsoon. - Provide child crèches for women working construction site. The crèche shall have facilities for dormitory, kitchen, indoor and outdoor play area. Schools shall be attached to these crèches so that children are not deprived of education whose mothers are construction workers - Provide in-house community/common

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		entertainment facilities. dependence of local entertainment outlets by the construction camps to be discouraged/prohibited to the extent possible.
Disposal of waste	Management of wastes is crucial to minimize impacts on the environment	The Contractor shall • Ensure proper collection and disposal of solid wastes within the construction camps • Insist waste separation by source; organic wastes in one pot and inorganic wastes in another pot at household level. • Store inorganic wastes in a safe place within the household and clear organic wastes on daily basis to waste collector. Establish waste collection, transportation and disposal systems with the manpower and equipments/vehicles needed. • Dispose organic wastes in a designated safe place on daily basis. At the end of the day cover the organic wastes with a thin layer of sand so that flies, mosquitoes, dogs, cats, rats, are not attracted. One may dig a large hole to put organic wastes in it; take care to protect groundwater from contamination by leachate formed due to decomposition of wastes. Cover the bed of the pit with impervious layer of materials (clayey or thin concrete) to protect groundwater from contamination. • Locate the garbage pit/waste disposal site min 500 m away from the residence so that peoples are not disturbed with the odor likely to be produced from anaerobic decomposition of wastes at the waste dumping places. Encompass the waste dumping place by fencing and tree plantation to prevent children to enter and play with. • Do not establish site specific landfill sites. All solid waste will be collected and removed from the work camps and disposed in approval waste disposal sites.
Fuel supplies for cooking purposes	Illegal sourcing of fuel wood by construction workers will impact the natural flora and fauna	The Contractor shall • Provide fuel to the construction camps for their domestic purpose, in order to discourage them to use fuel wood or other biomass. • Made available alternative fuels like natural gas or kerosene on ration to the workforce to

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		prevent them using biomass for cooking. • Conduct awareness campaigns to educate workers on preserving the protecting the biodiversity and wildlife of the project area, and relevant government regulations and punishments on wildlife protection.
Health and Hygiene	There will be a potential for diseases to be transmitted including malaria, exacerbated by inadequate health and safety practices. There will be an increased risk of work crews spreading sexually transmitted infections and HIV/AIDS.	The Contractor shall • Provide adequate health care facilities within construction sites. • Provide first aid facility round the clock. Maintain stock of medicines in the facility and appoint fulltime designated first aider or nurse. • Provide ambulance facility for the laborers during emergency to be transported to nearest hospitals. • Initial health screening of the laborers coming from outside areas • Train all construction workers in basic sanitation and health care issues and safety matters, and on the specific hazards of their work • Provide HIV awareness programming, including STI (sexually transmitted infections) and HIV information, education and communication for all workers on regular basis • Complement educational interventions with easy access to condoms at campsites as well as voluntary counseling and testing • Provide adequate drainage facilities throughout the camps to ensure that disease vectors such as stagnant water bodies and puddles do not form. Regular mosquito repellent sprays during monsoon. • Carryout short training sessions on best hygiene practices to be mandatorily participated by all workers. Place display boards at strategic locations within the camps containing messages on best hygienic practices
Safety	In adequate safety facilities to the construction camps may create security problems and fire hazards	The Contractor shall • Provide appropriate security personnel (police / home guard or private security guards) and enclosures to prevent unauthorized entry in to the camp area. • Maintain register to keep a track on a head count of persons present in the camp at any

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		given time. • Encourage use of flameproof material for the construction of labor housing / site office. Also, ensure that these houses/rooms are of sound construction and capable of withstanding wind storms/cyclones. • Provide appropriate type of firefighting equipments suitable for the construction camps • Display emergency contact numbers clearly and prominently at strategic places in camps. • Communicate the roles and responsibilities of laborers in case of emergency in the monthly meetings with contractors.
Site Restoration	Restoration of the construction camps to original condition requires demolition of construction camps.	The Contractor shall • Dismantle and remove from the site all facilities established within the construction camp including the perimeter fence and lockable gates at the completion of the construction work. • Dismantle camps in phases and as the work gets decreased and not wait for the entire work to be completed • Give prior notice to the laborers before demolishing their camps/units • Maintain the noise levels within the national standards during demolition activities • Different contractors shall be hired to demolish different structures to promote recycling or reuse of demolished material. • Reuse the demolition debris to a maximum extent. Dispose remaining debris at the designated waste disposal site. • Handover the construction camps with all built facilities as it is if agreement between both parties (contractor and land-owner) has been made so. • Restore the site to its condition prior to commencement of the works or to an agreed condition with the landowner. • Not make false promises to the laborers for future employment in O&M of the project.

ECoP 18: Cultural and Religious Issues

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Construction activities near religious and cultural sites	Disturbance from construction works to the cultural and religious sites, and contractors lack of knowledge on cultural issues cause social disturbances.	The Contractor shall • Communicate to the public through community consultation and newspaper announcements regarding the scope and schedule of construction, as well as certain construction activities causing disruptions or access restriction. • Do not block access to cultural and religious sites, wherever possible • Restrict all construction activities within the foot prints of the construction sites. • Stop construction works that produce noise (particularly during prayer time) shall there be any mosque/religious/educational institutions close to the construction sites and users make objections. • Take special care and use appropriate equipment when working next to a cultural/religious institution. • Stop work immediately and notify the site manager if, during construction, an archaeological or burial site is discovered. It is an offence to recommence work in the vicinity of the site until approval to continue is given by the CSC/PMU. • Provide separate prayer facilities to the construction workers. • Show appropriate behavior with all construction workers especially women and elderly people • Allow the workers to participate in praying during construction time • Resolve cultural issues in consultation with local leaders and supervision consultants • Establish a mechanism that allows local people to raise grievances arising from the construction process. • Inform the local authorities responsible for health, religious and security duly informed before commencement of civil works so as to maintain effective surveillance over public health, social and security matters

ECoP 19: Worker Health and Safety

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
Best practices	Construction works may pose health and safety risks to the construction workers and site visitors leading to severe injuries and deaths. The population in the proximity of the construction site and the construction workers will be exposed to a number of (i) biophysical health risk factors, (e.g. noise, dust, chemicals, construction material, solid waste, waste water, vector transmitted diseases etc), (ii) risk factors resulting from human behavior (e.g. STD, HIV etc) and (iii) road accidents from construction traffic.	The Contractor shall - Implement suitable safety standards for all workers and site visitors which shall not be less than those laid down on the international standards (e.g. International Labor Office guideline on 'Safety and Health in Construction; World Bank Group's 'Environmental Health and Safety Guidelines') and contractor's own national standards or statutory regulations, in addition to complying with the national standards of the Government of Bangladesh (e.g. 'The Bangladesh Labor Code, 2006') - Provide the workers with a safe and healthy work environment, taking into account inherent risks in its particular construction activity and specific classes of hazards in the work areas, - Provide personal protection equipment (PPE) for workers, such as safety boots, helmets, masks, gloves, protective clothing, goggles, full-face eye shields, and ear protection. Maintain the PPE properly by cleaning dirty ones and replacing them with the damaged ones. - Safety procedures include provision of information, training and protective clothing to workers involved in hazardous operations and proper performance of their job - Appoint an environment, health and safety manager to look after the health and safety of the workers - Inform the local authorities responsible for health, religious and security duly informed before commencement of civil works and establishment of construction camps so as to maintain effective surveillance over public health, social and security matters
	Child and pregnant labor	The Contractor shall not hire children of less than 14 years of age and pregnant women or women who delivered a child within 8 preceding weeks, in accordance with the Bangladesh Labor Code, 2006
Accidents	Lack of first aid facilities and health	Provide health care facilities and first aid facilities are readily available. Appropriately

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
	care facilities in the immediate vicinity will aggravate the health conditions of the victims	equipped first-aid stations shall be easily accessible throughout the place of work • Document and report occupational accidents, diseases, and incidents. • Prevent accidents, injury, and disease arising from, associated with, or occurring in the course of work by minimizing, so far as reasonably practicable, the causes of hazards. In a manner consistent with good international industry practice. • Identify potential hazards to workers, particularly those that may be life-threatening and provide necessary preventive and protective measures. • Provide awareness to the construction drivers to strictly follow the driving rules • Provide adequate lighting in the construction area and along the roads
Construction Camps	Lack of proper infrastructure facilities, such as housing, water supply and sanitation facilities will increase pressure on the local services and generate substandard living standards and health hazards.	The Contractor shall provide the following facilities in the campsites to improve health and hygienic conditions as mentioned in ECoP 17 Construction Camp Management • Adequate ventilation facilities • Safe and reliable water supply. Water supply from deep tube wells that meets the national standards • Hygienic sanitary facilities and sewerage system. The toilets and domestic waste water will be collected through a common sewerage. • Treatment facilities for sewerage of toilet and domestic wastes • Storm water drainage facilities. • Recreational and social facilities • Safe storage facilities for petroleum and other chemicals in accordance with ECoP 2 • Solid waste collection and disposal system in accordance with ECP1. • Arrangement for trainings • Paved internal roads. • Security fence at least 2 m height. • Sick bay and first aid facilities
Water and sanitation facilities at the	Lack of Water sanitation facilities at construction sites cause	• The contractor shall provide portable toilets at the construction sites, if about 25 people are working the whole day for a month. Location

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
construction sites	inconvenience to the construction workers and affect their personal hygiene.	of portable facilities shall be at least 6 m away from storm drain system and surface waters. These portable toilets shall be cleaned once a day and all the sewerage shall be pumped from the collection tank once a day and shall be brought to the common septic tank for further treatment. Contractor shall provide bottled drinking water facilities to the construction workers at all the construction sites.
Other ECPs	Potential risks on health and hygiene of construction workers and general public	The Contractor shall follow the following ECPs to reduce health risks to the construction workers and nearby community - ECoP 2: Fuels and Hazardous Goods Management - ECoP 4: Drainage Management - ECoP 10: Air Quality Management - ECoP 11: Noise and Vibration Management - ECoP 15: Road Transport and Road Traffic Management - ECoP 16: River Transport management
Trainings	Lack of awareness and basic knowledge in health care among the construction workforce, make them susceptible to potential diseases.	The Contractor shall - Train all construction workers in basic sanitation and health care issues (e.g., how to avoid malaria and transmission of sexually transmitted infections (STI) HIV/AIDS. - Train all construction workers in general health and safety matters, and on the specific hazards of their work Training shall consist of basic hazard awareness, site specific hazards, safe work practices, and emergency procedures for fire, evacuation, and natural disaster, as appropriate. - Commence the malaria, HIV/AIDS and STI education campaign before the start of the construction phase and complement it with by a strong condom marketing, increased access to condoms in the area as well as to voluntary counseling and testing. - Implement malaria, HIV/AIDS and STI education campaign targeting all workers hired, international and national, female and male, skilled, semi- and unskilled occupations, at the time of recruitment and thereafter pursued throughout the construction phase on

Project Activity/ Impact Source	Environmental Impacts	Mitigation Measures/ Management Guidelines
		ongoing and regular basis. This shall be complemented by easy access to condoms at the workplace as well as to voluntary counseling and testing.

Annex I. ToR for External Environmental Monitoring

Citation in the main text (Volume I): **Section 11.5.3.**

Background

The lower Brahmaputra, named Jamuna in Bangladesh is one of largest rivers in the World. Following its avulsion (change of course) into the present day Jamuna River during the late 17th century, it has been constantly migrating westward and additionally widened by 50% from 8 to 12 km since the 1970s. These morphological changes have led to the loss of about 88,000 ha of floodplain from 1973 to 2014, affecting the ecology and livelihood of the floodplain dwellers by displacing hundreds and thousands of people. In addition to unpredictable riverbank erosion, floods are the other major natural hazard. While typically 20% of the country is flooded during the annual monsoon, severe floods have inundated up to two thirds of the country.

The Government of Bangladesh through Bangladesh Water Development Board (BWDB) is preparing the River Bank Improvement Program (RBIP) to reconstruct the existing degraded embankment and secure it against riverbank erosion along 137 km length from the Teesta River to the Jamuna Bridge. The program will be designed and implemented in three phases. A 50 km long priority reach between Simla and Hasnapara will be protected in Phase 1. Phase 2 covers the remaining 87 km while Phase 3 focuses on and the construction of a highway on the countryside of the new flood embankment. The entire program will be implemented over a period of 10 years.

Objectives

A detailed ESMP has been prepared as part of the present EIA study. As one of the key elements of the ESMP, a three-tier monitoring program has been proposed comprising compliance monitoring, effects monitoring, and external monitoring. The main purpose of the monitoring program is to ensure that the various tasks detailed in the ESMP particularly the mitigation measures are implemented in an effective manner, and also to evaluate project's impacts on the key environment and social parameters.

The main purpose of the external monitoring – the third tier of the monitoring program - will be to ensure that all the key entities including EDSU, CSC, and contractors are effectively and adequately fulfilling their designated role for ESMP implementation, and that all the ESMP requirements are being implemented in a timely and effective manner. The primary objective for engaging an independent external monitor is to review the efficacy of ESMP implementation as well as internal monitoring, and conduct periodic third party monitoring and provide feedback to BWDB and WB on policy improvement and enhancement of implementation process. The External Monitoring Consultants (EMC) will review implementation process as per set procedures and tasks given in the ESMP and assess the achievement of overall environmental management objectives.

Scope of Work

The scope of work of the EMC will include the following specific tasks:

- To develop specific monitoring indicators, checklists, and questionnaires to undertake external monitoring (a preliminary list of monitoring indicators has been given in the ESMP) in consultation with BWDB and WB.

- To review and verify the implementation progress of various ESMP elements, particularly, mitigation plan, compliance and effects monitoring, environmental trainings, documentation, and grievance redress mechanism.
- To review and verify the functioning of the key entities – ESDU, CSC, and contractors - for environmental management.
- Identify the strengths and weaknesses of the design of ESMP and its implementation, and also the entities tasked to undertake various tasks detailed in the ESMP.
- Evaluate and assess the institutional arrangements established for the environmental management of the project. Evaluate and assess the effectiveness and appropriateness of the key personnel of ESDU, CSC, and contractors tasked to implement various aspects of the ESMP.
- Evaluate and assess the adequacy of the mitigation measures proposed in the Mitigation Plan in addressing the potentially negative impacts of the project activities and propose changes as appropriate.
- Review results of internal monitoring (compliance and effects monitoring) and verify its effectiveness through community consultations, spot checks, and field observations.
- Review the process and outcome of environmental trainings conducted by different project entities in line with the training program given in the ESMP.
- Review the process and outcome of the documentation and reporting being carried out by various project entities in line with the ESMP requirements.
- Identify, quantify, and qualify the types of ESMP-related conflicts and grievances reported and resolved and the consultation and participation procedures.
- Provide a summary of whether ESMP is being effectively implemented
- Describe any outstanding actions that are required to bring ESMP implementation in line with the GoB and WB requirements as stated in the EIA. Describe further mitigation measures and or corrective actions needed to ensure that the project remains environmentally and socially acceptable. Provide a timetable and define budget requirements for these supplementary mitigation measures / corrective actions.
- Describe any lessons learned that might be useful for environmental assessment and management of future projects.

Approach and Methodology

The general approach will include monitoring of ESMP implementation activities and to identify any environmental impacts actually caused by the project. The EMC will conduct quarterly field visits for external monitoring. During the field visits, the EMC will carry out meetings with the key project entities including PMU, ESDU, CSC, and contractors; review reports and record of ESMP implementation; conduct consultation meetings with key stakeholders particularly communities and local government officials; carry out field investigations including spot checks and visual observations, and identify need of any sampling and laboratory analysis.

The EMC will prepare checklists and questionnaires for the field investigations, comprising both qualitative and quantitative parameters. After each field visit, the EMC will prepare external monitoring report comprising field observations and findings, assessment of ESMP implementation, key gaps identified, conclusions, and recommendations for addressing the gaps.

Responsibility of BWDB

The BWDB through its PMU will ensure timely supply of background references, data and project options to the EMC. It will ensure uninterrupted access to work sites, relevant offices of the GOB and BWDB in particular. The EMC will participate in quarterly coordination meetings with the BWDB in presence of the CSC.

Recommendation based on the result of the external monitoring will be provided to BWDB to cover up the deficiencies identified by the EMC. BWDB will accept the recommendations of the EMC if they are within the scope of work and there is nothing incorrect in the report.

Responsibility of CSC

The CSC will provide appropriate protocol at site or at its Project Office for the field visit of the EMC. It will on behalf of BWDB ensure free access to work sites, impact areas and the database on ESMP implementation. The CSC will ensure timely intimation of its works planning as and when made or updated during the construction period and keep the EMC informed.

Team Composition of the EMC

The tasks of the key members of the EMC are given below.

Position/expertise	Qualification and experience
1. Team Leader/ ESMP Implementation Specialist	Masters in environment engineering or environmental science with 15 years working background in planning, implementation and monitoring of environmental management for large infrastructure projects. Experience in institutional capacity analysis, preparation and implementation of ESMPs, and knowledge of latest environmental safeguard policies of the international development financing institutions in Bangladesh are required.
2. Environment Specialist(s)	Masters in environment engineering or environmental science with 10 years working experience in environmental impact assessment including field surveys, stakeholder consultations, and analyzing environmental impacts to identify mitigation measures in compliance with environmental safeguard policies of the international development financing institutions and national legislations. Experience of preparing and implementing ESMP for externally financed projects is essential.
3. Ecologists	Masters in biological sciences with 15 years working experience in relevant fields. Thorough knowledge of ecological issues (natural vegetation, terrestrial as well as aquatic fauna, fish, and birds) and their implications for development projects; research and work experience relating to ecological issues; and knowledge of techniques for data collection and analysis.

4. Data Analyst	Graduate with working experience and knowledge of software, those are most commonly used in Bangladesh; demonstrated ability to design and implement automated MIS(s) for monitoring progress, comparing targets with achieved progress and the procedural steps.

Time Frame and Reporting

The EMC will be employed over a period of five years with intermittent inputs from the professional team to continue one year after completion of the RBIP implementation.

Quarterly and annual monitoring reports should be submitted to the BWDB with copies to the WB. An evaluation report at the end of the Project should be submitted to the BWDB and WB with critical analysis of the achievement of the programs and the environmental performance of RBIP.

The EMC will provide monitoring and evaluation report covering the following aspects:

- Field observations, results of any field investigations and or laboratory analysis
- Assessment of whether the ESMP is being implemented as planned and budgeted
- Assessment of the extent to which the specific ESMP objectives and the expected outcomes/results have been achieved and the factors affecting their achievement or non achievement
- Major areas of improvement and key risk factors
- Major lessons learnt and
- Recommendations.

Formats for collection and presentation of monitoring data will be designed in consultation with BWDB.

Budget and Logistics

The budget should include all expenses such as staff salary, office accommodation, training, computer/software, transport, field expenses and other logistics necessary for field activities, data collection, processing and analysis for monitoring and evaluation work. Additional expense claims whatsoever outside the proposed and negotiated budget will not be entertained. VAT, Income Tax and other charges admissible will be deducted at source as per GOB laws.